ANNEX 7

EXAMPLES OF ARRANGEMENTS OF THE GHS LABEL ELEMENTS

Copyright © United Nations, 2007. All rights reserved


Annex 7

EXAMPLES OF ARRANGEMENTS OF THE GHS LABEL ELEMENTS

The following examples are provided for illustrative purposes and are subject to further discussion and consideration by the GHS Sub-Committee.

Example 1: Combination packaging for a Category 2 flammable liquid

Outer Packaging: Box with a flammable liquid transport label*
Inner Packaging: Plastic bottle with GHS hazard warning label**

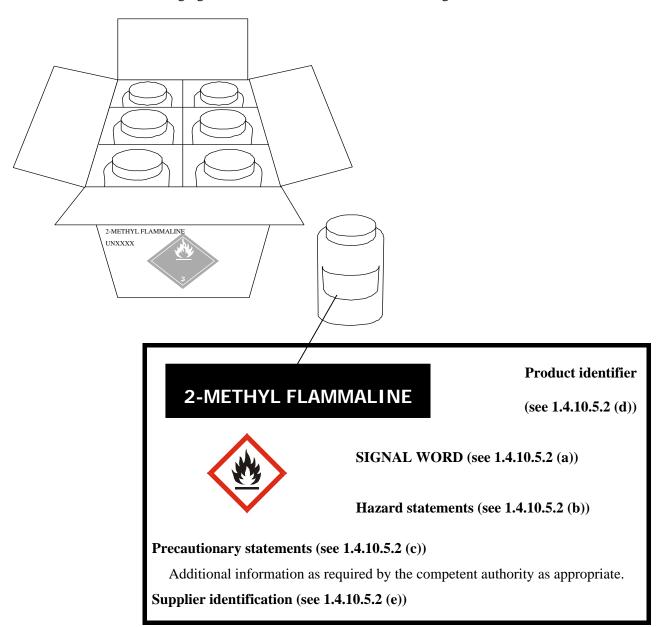


^{*} Only the UN transport markings and labels are required for outer packagings.

^{**} A flammable liquid pictogram as specified in the "UN Recommendations on the Transport of Dangerous Goods, Model Regulations" may be used in place of the GHS pictogram shown on the inner packaging label.

Example 2: Combination packaging for a Category 1 specific target organ toxicant and Category 2 flammable liquid

Outer Packaging: Box with a flammable liquid transport label*
Inner Packaging: Plastic bottle with GHS hazard warning label**

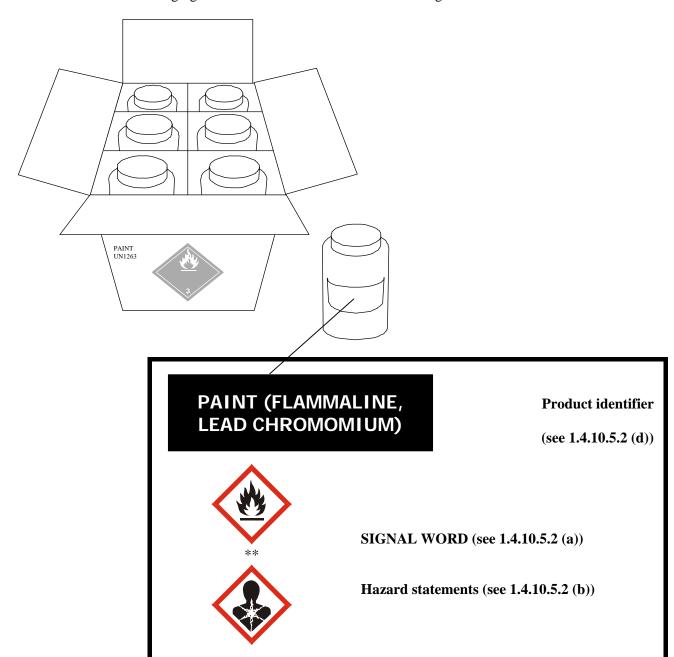

Precautionary statements (see 1.4.10.5.2 (c))

Additional information as required by the competent authority as appropriate.


Supplier identification (see 1.4.10.5.2 (e))

^{*} Only the UN transport markings and labels are required for outer packagings.

^{**} A flammable liquid pictogram as specified in the UN Recommendations on the Transport of Dangerous Goods, Model Regulations may be used in place of the GHS pictogram shown on the inner packaging label.


Example 3: Combination packaging for a Category 2 skin irritant and Category 2A eye irritant

Outer Packaging: Box with no label required for transport*
Inner Packaging: Plastic bottle with GHS hazard warning label

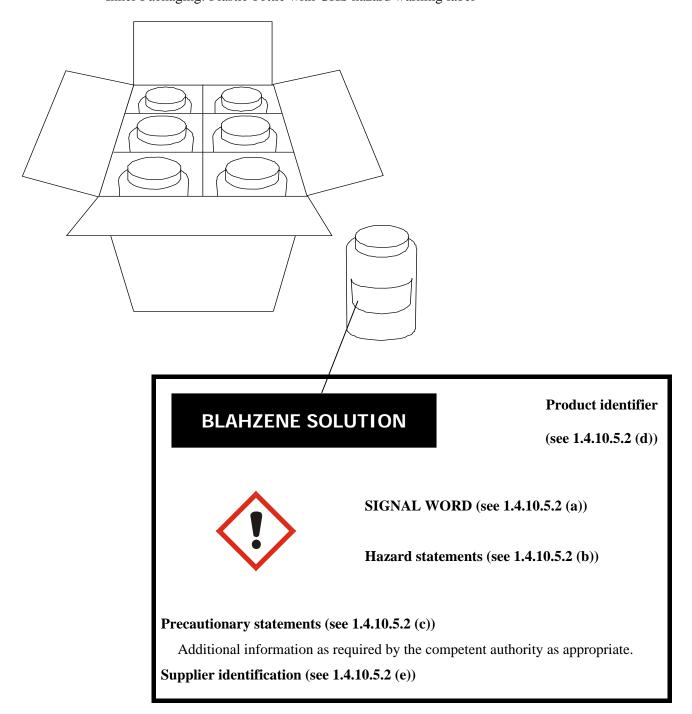


^{*} Some competent authorities may require a GHS label on the outer packaging in the absence of a transport label.

Example 4: Single packaging (200 l drum) for a Category 2 flammable liquid

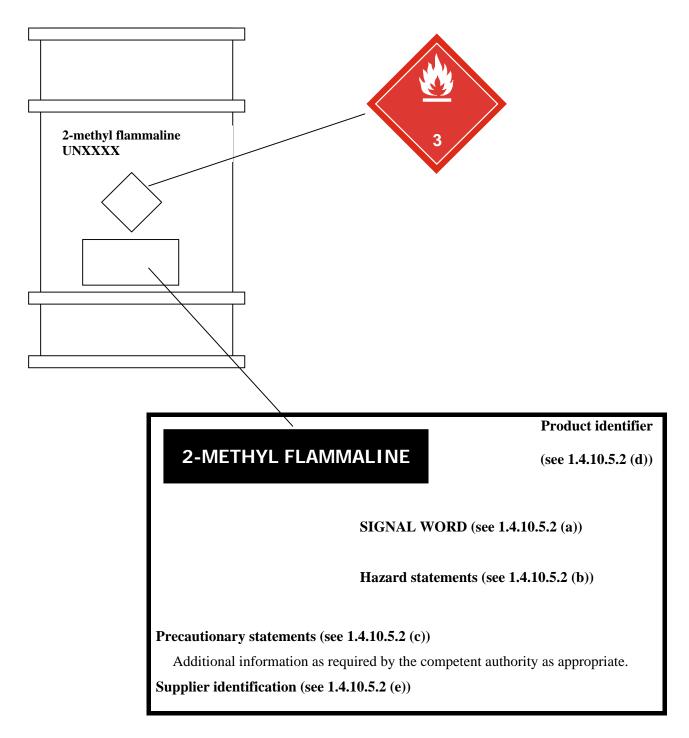

Note: The GHS label and the flammable liquid pictogram and markings required by the "UN Recommendations on the Transport of Dangerous Goods, Model Regulations" may also be presented in a combined format.

Example 5: Single packaging for a Category 1 specific target organ toxicant and Category 2 flammable liquid

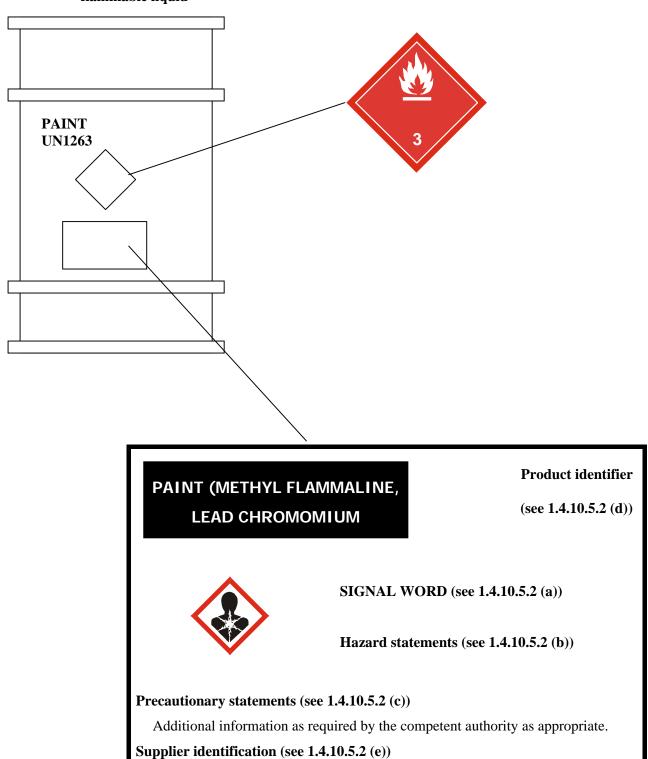

Note: The GHS label and the flammable liquid pictogram and markings required by the "UN Recommendations on the Transport of Dangerous Goods, Model Regulations" may also be presented in a combined format.

Example 6: Single packaging for a Category 2 skin irritant and Category 2A eye irritant



Example 7: Additional guidance when transport and other GHS information appear on single packagings

- (a) Where transport and other GHS information appear on a single packaging (e.g. a 200 l drum), consideration must be given to ensure that the label elements are placed in a manner that addresses the needs of the different sectors;
- (b) Transport pictograms must convey information immediately in an emergency situation. They must be able to be seen from a distance, as well as in conditions that are smoky or otherwise partially obscure the package;
- (c) The transport-related pictograms are distinct in appearance from pictograms intended solely for non-transport purposes which helps to distinguish them;
- (d) The transport pictograms may be placed on a separate panel of a GHS label to distinguish them from the other information or may be placed adjacent to the other GHS information on the packaging;
- (e) The pictograms may be distinguished by adjusting their size. Generally speaking, the size of the non-transport pictograms should be proportional to the size of the text of the other label elements. This would generally be smaller than the transport-related pictograms, but such size adjustments should not affect the clarity or comprehensibility of the non-transport pictograms;

Following is an example of how such a label may appear:

Product classified as: (a) Category 2 Flammable liquid; (b) Category Acute 4 (by inhalation); and (c) Category 2 Specific target organ toxicant following repeated exposure.

CODE


PRODUCT NAME

COMPANY NAME

Street Address City, State, Postal Code, Country **Phone Number Emergency Phone Number**

DIRECTIONS FOR USE: XXXXXXXXXXXXXXXXXX XXXXXXXXXXXXXXXXXX XXXXXXXXXXXXXXXXXXX





Highly flammable liquid and vapour. Harmful if inhaled. May cause liver and kidney damage through prolonged or repeated exposure.

Keep container tightly closed. Keep away from heat/sparks/open flame. -No smoking. Use only outdoors or in a well-ventilated area. Do not breath fume/gas/mist/vapours/spray. Wear protective gloves and eye/face protection [as specified....] Ground/bond container and receiving equipment.

IN CASE OF FIRE use [as specified] for extinction

FIRST AID IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.



UN Number Proper shipping name

[Universal Product Code (UPC)]

Fill weight: XXXX Gross weight: XXXX

Expiration Date: XXXX

Lot Number: Fill Date:

XXXX

XXXX

Store in a cool, well-ventilated place.