ADN catalogue of questions 2017: General/Transport by dry cargo vessels/Transport by tank vessels

Number	Sourc	ce	Correct answer
110 01.0-01	Agreement What is the abbreviation for the European Agreement concerning the International Carriage of Dangerous Goods by Inland Waterways?		В
	A	AITMD	
	В	ADN	
	C	ADR	
	D	RID	
110 01.0-02	1.1.2	2.1	D
	Wha	nt does ADN govern?	
	A	Transport of all goods by vessel	
	В	Transport of dangerous goods by inland navigation routes for which carriage by rail or road is prohibited	
	C	Transport of dangerous goods only by tank vessels in inland navigation	
	D	The conditions in which dangerous goods may be transported on inland waterways	
110 01.0-03	2.1.1	1.1	D
	Whe	ere does the list of classes of dangerous goods appear in ADN?	
	A	4.1	
	В	3.1.1	
	C	1.1.1.1	
	D	2.1.1.1	
110 01.0-04	3.2.1	1, 3.2.3	A
		ere in ADN can you read which goods are authorized for transport in vessels?	
	A	In Chapter 3.2, Tables A and C	
	В	In the ship's certificate	
	C	In Section 3.2.2, Table B	
	D	In the definitions in Section 1.2.1	

Number	Source		Correct answer
110 01.0-05	8.1.2.	1	A
	Under ADN, which texts must be on board a vessel transporting dangerous goods?		
	A	ADN	
	В	Only Part 7 of ADN and the instructions in writing	
	C	Only Part 8 of ADN	
	D	ADN, and if the shipment is taken up from road ADR	
110 01.0-06	7.1.3		В
		g the transport of dangerous goods in dry cargo vessels, general requirements apply. Where do these requirements appear in?	
	A	In Sections 2.1.1 to 2.1.4	
	В	In Subsections 7.1.3.1 to 7.1.3.99	
	C	In Subsections 2.2.43.1 to 2.2.43.3	
	D	In Subsections 7.2.3.1 to 7.2.3.99	
110 01.0-07	7.2.3		D
		g the transport of dangerous goods in tank vessels, general service rements apply. Where do these requirements appear in ADN?	
	A	In Sections 2.1.1 to 2.1.4	
	В	In Subsections 7.1.3.1 to 7.1.3.99	
	C	In Subsections 2.2.43.1 to 2.2.43.3	
	D	In Subsections 7.2.3.1 to 7.2.3.99	
110 01.0-08	Delete	ed (07.06.2005)	
110 01.0-09	8.2.1,	8.6.2, 7.1.3.15, 7.2.3.15	С
	How	do you understand the meaning of "expert" in ADN?	
	A	The consignor's safety adviser. As he or she knows the product best, that person is considered to be the expert under ADN	
	В	Because of their function, members of the river police are experts under ADN	
	C	A person who has a special knowledge of ADN and who can prove it by means of a certificate from a competent authority	
	D	Because of his or her training and general knowledge, every holder of a boatmaster's licence is an expert under ADN	

Number	Source	?	Correct answer
110 01.0-10	8.6.1		С
	In which part of ADN can you find models for the certificate of approval and the provisional certificate of approval?		
	A	Part 1	
	В	Part 2	
	C	Part 8	
	D	Part 9	
110 01.0-11	8.2.1.	2, 7.1.3.15, 7.2.3.15	С
	Who	is an expert under ADN in the meaning of 8.2.1.2?	
	A	Each boatmaster	
	В	A holder of a boatmaster's licence	
	С	A person able to prove his or her knowledge of ADN by means of a certificate from a competent authority	
	D	The person responsible for the cargo transfer station	
110 01.0-12	8.2.1.	4, 8.2.2.8	В
		is the validity period of a certificate of special knowledge ADN?	
	A	1 year	
	В	5 years	
	C	10 years	
	D	Unlimited	
110 01.0-13	1.1.2.	1	С
	What	is the purpose of the ADN rules?	
	A	ADN only contains the rules for protection of waterways against pollution	
	В	ADN is exclusively for ensuring the specific safety of transport in tank vessels	
	C	ADN specifies the conditions in which dangerous goods may be transported by inland navigation	
	D	ADN is intended to ensure special safety for the transport of dangerous goods by road, rail or air	

Number	Source	Correct answer
110 01.0-14	Part 9, 9.3.3	A
	Where in ADN can you find construction requirements for type N tank vessels?	
	A Part 9, in Section 9.3.3	
	B Part 9, in Chapter 9.1	
	C Part 9, in Chapter 9.2	
	D Part 9, in Section 9.1.3	
110 01.0-15	Part 9, 9.1	В
	Where in ADN can you find construction requirements for the construction of dry cargo vessels?	
	A Part 9, in Section 9.3.3	
	B Part 9, in Chapter 9.1	
	C Part 9, in Chapter 9.2	
	D Part 9, in Section 9.1.3	

Number	Source	Correct answer
110 02.0-01	7.1.3.31, 7.2.3.31	С
	A vessel is loaded with dangerous goods.	
	What is the maximum flash point of the fuel authorized for use in the onboard internal combustion engines?	
	A < 23 °C	
	B < 55 °C	
	C ≥55 °C	
	D ≥ 23 °C	
110 02.0-02	8.1.5.3	В
	A toximeter is required under Chapter 3.2, Table A. Must the toximeter also be on board pushed barges with no accommodation?	
	A Yes. There are no exceptions	
	B No, it is enough if the pusher tug or the vessel propelling the side-by-side formation is equipped with such equipment	
	C Yes, if the pusher tug has an engine room	
	D No, it is sufficient if the owner of the pusher tug designates a responsible person, that the person in question has such equipment and that he or she can be called quickly in case of need	
110 02.0-03	7.1.3.31, 7.2.3.31, 9.1.0.31, 9.2.0.31, 9.3.1.31, 9.3.2.31, 9.3.3.31	A
	Which fuel is prohibited for use for internal combustion engines on board vessels carrying dangerous goods?	
	A Fuel having a flash point < 55 °C	
	B Fuel having a flash point < 65 °C	
	C Fuel having a flash point < 75 °C	
	D Fuel having a flash point < 100 °C	
110 02.0-04	9.1.0.31.2, 9.3.1.31.2, 9.3.2.31.2, 9.3.3.31.2	D
	What distance must there be from the protected area or the cargo are to the air intakes of the internal combustion engines?	
	A At least 3.00 m	
	B They must be located in the protected area	
	C At least 2.50 m	
	D At least 2.00 m	

Number	Source	Correct answer
110 02.0-05	provisionally deleted 26.9.2016	С
110 02.0-06	9.1.0.34.2, 9.3.1.34.2, 9.3.2.34.2, 9.3.3.34.2	С
	A vessel is subject to ADN.	
	Which of these devices must be in the exhaust pipes?	
	A A fire detector	
	B A non-return valve	
	C A spark arrester	
	D A goose neck	
110 02.0-07	9.1.0.34.1, 9.3.1.34.1, 9.3.2.34.1, 9.3.3.34.1	A
	What is the minimum distance from the exhaust pipes to the protected area or the cargo area?	
	A 2.00 m	
	B 3.00 m	
	C 4.00 m	
	D 5.00 m	
110 02.0-08	9.1.0.41.2, 9.3.1.41.2, 9.3.2.41.2, 9.3.3.41.2	D
	A boiler in the engine room is fuelled with liquid fuel. What fuel is authorized?	
	A Fuel with a flash point ≥= 50 °C	
	B Fuel with a flash point < 5 °C	
	C Fuel with a flash point < 55 °C	
	D Fuel with a flash point ≥ 55 °C	
110 02.0-09	9.1.0.34.1, 9.3.1.34.1, 9.3.2.34.1, 9.3.3.34.1	A
	What is the minimum distance that there must be between the internal combustion engine exhaust pipes and the tank openings and cargo area?	
	A 2.00 m	
	B 2.50 m	
	C 3.00 m	
	D 1.00 m	

Number	Source	Correct answer
110 02.0-10	9.1.0.32.1, 9.3.1.32.1, 9.3.2.32.1, 9.3.3.32.1	В
	What is the minimum depth of the double bottom of a hold area or a hold space fitted out as a fuel tank?	
	A 0.80 m	
	B 0.60 m	
	C 1.00 m	
	D 0.50 m	
110 02.0-11	9.1.0.88, 9.2.0.88, 9.3.1.8, 9.3.2.8, 9.3.3.8	В
	Under ADN, which vessels must be built under survey of a recognized classification society and classed by it in its highest class?	
	A All vessels transporting dangerous goods	
	B Certain double-hull dry cargo vessels and all tank vessels transporting dangerous goods	
	C All vessels transporting dangerous goods except seagoing vessels covered by Chapter 9.2	
	D Only vessels used for the transport of chemicals	
110 02.0-12	7.1.2.5, 7.2.2.5	D
	The instructions for the use of on-board devices must be in which language(s)?	
	A At least in English	
	B In Dutch, English, German and French	
	C In the languages of the countries where the vessel sails during the voyage	
	D In German, French or English and, if necessary, in the language normally spoken on board	
110 02.0-13	8.1.6.3	A
	Who is responsible for checking and inspecting the special equipment required by ADN?	
	A A person authorized for this purpose by the manufacturer or the competent authority	
	B The manufacturer, as it alone knows how the device should be checked	
	C A company or person authorized by the competent authority	
	D An independent company authorized by the manufacturer	

Number	Source	•	Correct answer
110 02.0-14	8.1.5.	3	В
	The special equipment required by ADN for pushed convoys or side-by-side formations must be located where?		
	A	On board the vessel or the pusher tug where the dangerous goods are loaded	
	В	On board the pusher tug or the vessel propelling the formation	
	C	On board each unit comprising the assembly of vessels	
	D	On board a pusher tug with accommodation that is part of the assembly of vessels	
110 02.0-15	Delete	ed (03.12.2008)	
110 02.0-16	9.1.0.	52.4, 9.3.1.52.2, 9.3.2.52.2, 9.3.3.52.2	D
	Can a	accumulators be located in the protected area or the cargo area?	
	A	Yes	
	В	Yes, but only if they are in specially designed casings	
	C	Yes, but only if they are in specially designed casings fitted with ventilation grids protected against explosions	
	D	No, except when Chapter 1.6 applies	
110 02.0-17	1.2.1		В
	What is the meaning of a rescue winch in ADN?		
	A	A portable stripping pump to make it possible to pump water out of the vessel in the event of a leak	
	В	A device for hoisting persons from closed spaces such as cargo tanks	
	C	A stretcher for carrying an accident victim from the vessel to land	
	D	A second stripping pump permanently fixed in the engine room, capable independently of pumping water out of the vessel in the event of a leak	
110 02.0-18	1.2.1		A
	Unde	r ADN, what kinds of vessels have protected areas?	
	A	Only dry cargo vessels	
	В	Dry cargo vessels and tank vessels	
	C	Pusher tugs with a certificate of approval	
	D	Only tank vessels	

Number	Source	2	Correct answer
110 02.0-19	7.1.2	.5, 7.2.2.5	D
		nstructions for the use of devices and equipment required by ADN be on board. What language or languages must they be in?	
	A	Dutch, German, English and French	
	В	Dutch, German, French and Spanish	
	C	Dutch and German	
	D	German, French or English, and if necessary in the language normally spoken on board	
110 02.0-20	1.2.1	, 9.3.1.52.1, 9.3.2.52.1, 9.3.3.52.1	D
	What "zone	t types of vessels have zones classified in ADN as comparable to a e 0"?	
	A	Dry cargo vessels	
	В	Both dry cargo vessels and tank vessels	
	C	Pusher tugs that may push tank barges	
	D	Tank vessels	
110 02.0-21	1.2.1		С
	What	t is the meaning in ADN of a suitable escape device?	
	A	A mask protecting the user's respiratory organs for escape from a danger area	
	В	A mask protecting the user's eyes and ears for escape from a danger area	
	C	A respiratory protection device which can be easily put on, covering the wearer's mouth, nose and eyes and for escape from a danger area	
	D	A rowing boat for escape from a danger area	

Number	Sourc	ne	Correct answer
110 02.0-22	9.1.0	0.52.4, 9.3.1.52.2, 9.3.2.52.2, 9.3.3.52.2	A
	Und	er ADN, where may accumulators be located?	
	A	On board tank vessels and dry cargo vessels, outside the cargo area and the protected area, except when Chapter 1.6 applies	
	В	On board tank vessels outside the cargo area, but on board dry cargo vessels, in the protected area	
	C	On board tank vessels and dry cargo vessels, outside the cargo area and the protected area, provided they are placed in a special casing	
	D	On both tank vessels and dry cargo vessels, only in a special casing located directly behind the wheelhouse, on the roof of the accommodation	

Number	Source	?	Correct answer
110 04.0-01	8.1.5.	.1	С
	Gas d	letectors and toximeters must have what documentation?	
	A	A certificate of origin	
	В	A declaration of conformity	
	C	Instructions for their use	
	D	A copy of the invoice	
110 04.0-02	1.2.1		В
		ne vessel, how can you know if dangerous concentrations of toxic are emitted by the cargo?	
	A	With a gas detector	
	В	With a toximeter	
	C	With an oxygen meter	
	D	With daily checks	
110 04.0-03	8.1.6.	3	С
	Who	is responsible for checking the gas detection system?	
	A	The ADN expert	
	В	The system does not need to be checked; it does however have to be replaced after each use	
	C	Persons authorized to do so by the manufacturer or the competent authority	
	D	The crew, once a year	
110 04.0-04	Basic	general knowledge	С
	How	is the explosive range of a substance established?	
	A	Between the upper explosive limit and 100% in volume	
	В	Between the lower explosive limit and 10% in volume	
	C	Between the lower and upper explosive limits	
	D	Between 0% in volume and the upper explosive limit	

Number	Source	2	Correct answer
110 04.0-05	Basic general knowledge		A
	The explosive range of a flammable liquid is:		
	A	Between the lower and upper explosive limits	
	В	Above the upper explosive limit	
	C	Under the lower explosive limit	
	D	At the lower explosive limit	
110 04.0-06	8.1.6.	.3, 8.1.5.1	В
	Wher	n and by whom should the equipment referred to in 8.1.5.1 be ked?	
	A	Once a year, by the manufacturer	
	В	In accordance with the instructions of the manufacturer, by persons authorized to do so by the manufacturer or the competent authority	
	C	Once every two years, by a safety adviser	
	D	Before each departure by a person who has undergone ADN training	
110 04.0-07	Delet	ted (01.03.2009)	
110 04.0-08	Delet	ted (01.03.2009)	
110 04.0-09	Basic	general knowledge	A
	What	t does 1 ppm mean?	
	A	1 part per million parts	
	В	1 part per mass	
	C	1 part per metric tonne	
	D	1 part per milligram	
110 04.0-10	Basic	general knowledge	A
		t happens when a gas concentration is ignited between the lower osive limit and the upper explosive limit?	
	A	An explosion	
	В	Nothing at all	
	C	No explosion, as the mixture is too rich	
	D	No explosion, as the mixture is too lean	

Number	Source		
110 04.0-11	Basic general knowledge	В	
	The oxygen concentration in an on-board space is 30% by volume. What applies in this situation?		
	A The situation presents no danger at all		
	B There is a high risk of fire		
	C The situation may be considered to be normal		
	D The situation is highly toxic		
110 04.0-12	Basic general knowledge	С	
	What is meant by a "lean" mixture when speaking of a risk of explosion?		
	A There is little outside air		
	B There is little nitrogen		
	C There is little flammable substance		
	D There is little oxygen		
110 04.0-13	Basic general knowledge	D	
	A person must enter a space that has been closed for an extended period.		
	What is the greatest danger faced by such a person?		
	A Too many noble gases		
	B Too little nitrogen		
	C Too much oxygen		
	D Too little oxygen		
110 04.0-14	Basic general knowledge	A	
	What is the normal oxygen concentration in the ambient air?		
	A 21% by volume		
	B 19% by volume		
	C 17% by volume		
	D 15% by volume		

Number	Source		Correct answer	
110 04.0-15	Basic general knowledge, 7.1.3.1.6, 7.2.3.1.6		D	
	witho	ossible to enter holds, cargo tanks and double-hull spaces safely and ut a self-contained breathing apparatus when there are no dangerous in such a case, what is the minimum measured oxygen level red?		
	A	15%		
	В	16%		
	C	17%		
	D	21%		
110 04.0-16	1.2.1		В	
	What	measurement tool is used to measure toxic substances?		
	A	A gas detector		
	В	A toximeter		
	C	An ohmmeter		
	D	An oxygen meter		
110 04.0-17	1.2.1		В	
	Which			
	A	A nitrogen meter		
	В	A flammable gas detector		
	C	A toximeter		
	D	An oxygen meter		
110 04.0-18	Basic	general knowledge	С	
	What			
	A	Per person measured		
	В	Propane propene measured		
	C	Parts per million		
	D	Polypropylene methyl		

Number	Source		Correct answer
110 04.0-19	Basic general knowledge		С
	Certain gas samplers have does the tube serve?	e a tube placed in front of them. What purpose	
	A To read the value of work station	of the maximum acceptable concentration at the	
	B To read the ppm v	alue	
	C To collect humidit	y and impurities	
	D To verify reliabilit	y	
110 04.0-20	Basic general knowledge		D
	How can you ensure that a sampler is still reliable?		
	A By seeing if there	has been a colour change	
	B By seeing if it has	humidity inside	
	C By testing it		
	D By checking wheth	her the expiry date has passed	
110 04.0-21	Basic general knowledge		В
	In what unit of measurem	nent is the risk of explosion measured?	
	A In ppm		
	B In percentage of vo	olume	
	C In micrograms		
	D In threshold limit	value at the work station	

Number	Sourc	re	Correct answer		
110 05.0-01	2.1.1	1.1, 2.2.2	A		
	Clas	s 2 covers which dangerous goods?			
	A	Gases			
	В	Flammable liquids			
	C	Organic peroxides			
	D	Explosive substances			
110 05.0-02	2.1.1	1.1, 2.2.2	С		
	In w	hat class are gases?			
	A	Class 1			
	В	Class 5.2			
	C	Class 2			
	D	Class 3			
110 05.0-03	2.1.1	1.1, 2.2.3	В		
	In what class are flammable liquids?				
	A	Class 6.1			
	В	Class 3			
	C	Class 2			
	D	Class 8			
110 05.0-04	2.1.1	1.1, 2.2.3	В		
	Wha	t dangerous goods are in class 3?			
	A	Gases			
	В	Flammable liquids			
	C	Organic peroxides			
	D	Explosive substances			
110 05.0-05	2.1.1	1.1, 2.2.8	D		
	Wha	at is the main risk associated with a dangerous liquid of class 8?			
	A	Pressure			
	В	Flammability			
	C	Toxicity			
	D	Corrosiveness			

Number	Source		Correct answer	
110 05.0-06	2.1.1	.1, 2.2.52	С	
	Orga	nic peroxides are in which class?		
	A	Class 4.2		
	В	Class 5.1		
	C	Class 5.2		
	D	Class 6.2		
110 05.0-07	2.1.1	.1, 2.2.8	A	
	Wha	t dangerous goods are in class 8?		
	A	Corrosive substances		
	В	Radioactive material		
	C	Substances liable to spontaneous combustion		
	D	Infectious substances		
110 05.0-08	2.1.1.1, 2.2.62		В	
	What dangerous goods are in class 6.2?			
	A	Radioactive material		
	В	Infectious substances		
	C	Substances liable to spontaneous combustion		
	D	Substances which, in contact with water, emit flammable gases		
110 05.0-09	2.1.1.1, 2.2.3		В	
	Wha	t is the main risk associated with a dangerous liquid of class 3?		
	A	Pressure		
	В	Flammability		
	C	Toxicity		
	D	Radioactivity		
110 05.0-10	2.1.1	.1, 2.2.61	В	
	Wha	t is the main risk of a flammable liquid of class 6.1?		
	A	Flammability		
	В	Toxicity		
	C	Corrosiveness		
	D	Radioactivity		

Number	Source		Correct answer
110 05.0-11	2.1.2.	1, Table A	В
	Under	r ADN, can dangerous goods present several different risks?	
	A	No	
	В	Yes	
	C	No, there are no goods with several risks in ADN	
	D	No, ADN always cites only the main risk	
110 05.0-12	1.2.1		В
	What	is the self-ignition temperature?	
	A	The temperature of a liquid at which a mixture of gases above the liquid can be lit	
	В	The lowest temperature of a hot surface, determined in line with prescribed test conditions, at which a combustible liquid ignites as a gas/air or vapour/air mixture	
	C	The temperature at which a substance explodes	
	D	The lowest temperature at which a substance may be ignited when supplied with a great deal of oxygen	
110 05.0-13	1.2.1		A
	What	is the flash point?	
	A	The lowest temperature of a liquid substance at which its vapour mixed with air forms a flammable mixture	
	В	The temperature at which a substance ignites on its own	
	C	The temperature at which a substance explodes	
	D	The lowest temperature at which a substance ignites on its own when supplied with a great deal of oxygen	
110 05.0-14	3.3.1,	special provision 598	В
		are ordered to take a load of old damaged automobile batteries. Are dangerous goods?	
	A	No, automobile batteries are not dangerous goods	
	В	Yes, damaged batteries are dangerous goods	
	C	No, damaged batteries are not dangerous goods	
	D	No, when damaged batteries are packed in special containers, they are not dangerous goods	

Number	Source		Correct answer	
110 05.0-15	Basic	general knowledge	В	
	Why	is flammable dust particularly dangerous?		
	A	Mainly because of its toxicity		
	В	Because if stirred, it may produce a dust explosion		
	C	The dust can cause a breakdown in the air conditioning		
	D	Dust acts like any other flammable substance		
110 05.0-16	Basic	general knowledge	D	
	What	does toxicity mean?		
	A	Ignition of a substance		
	В	Combustion of a substance		
	C	The maximum amount of a substance that can be inhaled per hour		
	D	Toxicity of a substance		
110 05.0-17	Basic	general knowledge	С	
	How does UN No. 1203, PETROL, act when heated?			
	A	It solidifies		
	В	Heating does not change the liquid's volume		
	C	It expands		
	D	It concentrates		
110 05.0-18	2.2.2.	1.3	С	
		is the meaning of the letters TF in the following designation: UN No. HYDROGEN SULPHIDE, class 2, 2 TF?		
	A	Chemically unstable, toxic		
	В	Not flammable, toxic		
	C	Toxic, flammable		
	D	No special meaning		
110 05.0-19	2.2.6	1.1.4	A	
	What	does packing group II mean for substances of class 6.1?		
	A	Toxic		
	В	Harmful to health		
	C	Highly toxic		
	D	Corrosive		

Number	Source		Correct answer
110 05.0-20	2.2.3.1.3		С
	What do packing	g groups I, II and III mean for substances of class 3?	
	A They inc	licate the miscibility with water	
	B They pro	ovide information on the required danger labels	
	C They ind	licate the degree of danger	
	D They pro	ovide information on the appropriate means with which to sh a fire	
110 05.0-21	1.2.1, 2.2.3.1.3		D
	What is the mea	aning of packing group I for substances of class 3?	
	A Substance	ce without subsidiary risk	
	B Substance	ce presenting low danger	
	C Substance	ce presenting medium danger	
	D Substance	ee presenting high danger	
110 05.0-22	1.2.1, 2.2.8.1.3		A
	What is the mea		
	A Slightly	corrosive substance	
	B Substance	ce without subsidiary risk	
	C Corrosiv	re substance	
	D Highly c	orrosive substance	
110 05.0-23	Basic general k	nowledge	В
		produced by a leak of the following gases when they are and liquefied: helium, nitrogen, carbon dioxide?	
	A Producti combust	on of gaseous mixtures with a risk of spontaneous ion	
	B Danger	of asphyxia for humans and animals	
	C Increase	of the risk of fire	
	D Producti	on of flammable gases through the effect of cooling	
110 05.0-24	3.2, Table A		С
	Which of the fo	llowing gases is flammable?	
	A UN No.	1066, NITROGEN, class 2, 1A	
	B UN No.	1006, ARGON, class 2, 1A	
	C UN No.	1978, PROPANE, class 2, 2F	
		2451, NITROGEN TRIFLUORIDE, class 2, 2TO	

Number	Source	?	Correct answer		
110 05.0-25	2.1.1	.1, 2.2.51	D		
	What	is the main danger posed by a hazardous substance of class 5.1?			
	A	Danger of radiation			
	В	Danger of self-ignition			
	C	Danger of intoxication			
	D	Oxidizing substances			
110 05.0-26	Basic	general knowledge	A		
		is the significant characteristic of PROPANE, ARGON and BON DIOXIDE?			
	A	Heavier than air			
	В	Toxic			
	C	Heavier than water			
	D	Readily flammable			
110 05.0-27	2.1.1.1, 2.2.8		В		
	What is the main risk associated with a dangerous liquid of class 8?				
	A	Flammability			
	В	Corrosiveness			
	C	Toxicity			
	D	Explosiveness			
110 05.0-28	2.1.1	.1, 2.2.61	A		
	Whic	th ADN class contains substances whose main risk is toxicity?			
	A	Class 6.1			
	В	Class 2			
	C	Class 3			
	D	Class 5.1			
110 05.0-29	2.1.1	.1, 2.2.51	В		
	Whic				
	A	Class 2			
	В	Class 5.1			
	C	Class 3			
	D	Class 4.2			

Number	Source		Correct answer
110 05.0-30	2.1.	1.1, 2.2.9	С
	Which dangerous goods are in class 9?		
	A	Radioactive material	
	В	Gases	
	C	Miscellaneous dangerous substances and articles	
	D	Organic peroxides	
110 05.0-31	2.1.	1.1, 2.2.8	A
	Whi	ch dangerous goods are in class 8?	
	A	Corrosive substances	
	В	Toxic substances	
	C	Oxidizing substances	
	D	Radioactive material	
110 05.0-32	2.1.1.1, 2.2.7		В
	Which dangerous goods are in class 7?		
	A	Organic peroxides	
	В	Radioactive material	
	C	Explosive substances	
	D	Infectious substances	
110 05.0-33	2.1.	1.1, 2.2.62	С
	Whi	ch dangerous goods are in class 6.2?	
	A	Flammable liquids	
	В	Toxic substances	
	C	Infectious substances	
	D	Corrosive substances	
110 05.0-34	2.1.	1.1, 2.2.61	D
	Whi	ch dangerous goods are in class 6.1?	
	A	Gases	
	В	Flammable liquids	
	C	Corrosive substances	
	D	Toxic substances	

Number	Source		Correct answer	
110 05.0-35	2.1.1	.1, 2.2.52	A	
	Whic	h dangerous goods are in class 5.2?		
	A	Organic peroxides		
	В	Miscellaneous dangerous substances and articles		
	C	Gases		
	D	Corrosive substances		
110 05.0-36	2.1.1.	.1, 2.2.51	В	
	Whic	h dangerous goods are in class 5.1?		
	A	Substances liable to spontaneous combustion		
	В	Oxidizing substances		
	C	Flammable solids		
	D	Flammable liquids		
110 05.0-37	2.1.1.1, 2.2.43		С	
	Whic			
	A	Organic peroxides		
	В	Corrosive substances		
	C	Substances which, in contact with water, emit flammable gases		
	D	Gases		
110 05.0-38	2.1.1.1, 2.2.42		В	
	Whic	h dangerous goods are in class 4.2?		
	A	Radioactive material		
	В	Substances liable to spontaneous combustion		
	C	Flammable solids		
	D	Flammable liquids		
110 05.0-39	2.1.1	.1, 2.2.41	D	
	Which dangerous goods are in class 4.1?			
	A	Substances liable to spontaneous combustion		
	В	Flammable liquids		
	C	Oxidizing substances		
	D	Flammable solids		

Number	Source		Correct answer
110 05.0-40	2.1.1	1.1, 2.2.2	В
	Whi	ch dangerous goods are in class 2?	
	A	Miscellaneous dangerous substances and articles	
	В	Gases	
	C	Radioactive material	
	D	Organic peroxides	
110 05.0-41	2.1.1	1.1, 2.2.3	С
	Whi	ch dangerous goods are in class 3?	
	A	Substances liable to spontaneous combustion	
	В	Flammable solids	
	C	Flammable liquids	
	D	Oxidizing substances	
110 05.0-42	2.1.1.1, 2.2.3		A
	Flammable liquids should be assigned to which class?		
	A	Class 3	
	В	Class 4.1	
	C	Class 6.1	
	D	Class 8	
110 05.0-43	2.1.1	1.1, 2.2.7	С
	Radi	oactive material should be assigned to which class?	
	A	Class 6.1	
	В	Class 8	
	C	Class 7	
	D	Class 9	
110 05.0-44	2.1.1	1.1, 2.2.8	В
	Corr	osive substances should be assigned to which class?	
	A	Class 9	
	В	Class 8	
	C	Class 5.2	
	D	Class 4.3	

Number	Source	2	Correct answer
110 05.0-45	3.2, 7	Γable A or C	A
	To w	hich class does UN No. 1134, CHOLOROBENZENE belong?	
	A	Class 3	
	В	Class 6.1	
	C	Class 7	
	D	Class 8	
110 05.0-46	Basic	general knowledge	В
	Comp	pared with the density of air, the density of liquid vapours is most often	
	A	The same	
	В	Higher	
	C	Lower	
	D	None of the above answers is correct	
110 05.0-47	Basic	general knowledge	D
	What	t is the latin name of oxygen?	
	A	Ferrum	
	В	Hydrogenium	
	C	Nitrogenium	
	D	Oxygenium	
110 05.0-48	Basic general knowledge		В
	What	t is the meaning of "N" in chemical formulas?	
	A	Carbon	
	В	Nitrogen	
	C	Hydrogen	
	D	Oxygen	
110 05.0-49	Basic	A	
	What	t is the symbol of carbon?	
	A	С	
	В	Н	
	C	K	
	D	0	

Number	Source		Correct answer
110 05.0-50	Basic	general knowledge	С
	What	is the meaning of the boiling point of a liquid?	
	A	The pressure of the liquid at 100 °C	
	В	The quantity of liquid that has reached the temperature at which it boils	
	C	The temperature at which, at atmospheric pressure, a substance passes from the liquid state to the gaseous state	
	D	The temperature of a liquid at which a flammable mixture may form at its surface	
110 05.0-51	Basic	general knowledge	С
	The s	tate (solid, liquid, gas) of a substance depends on what?	
	A	Density	
	В	Composition	
	C	Pressure and temperature	
	D	Viscosity	
110 05.0-52	Basic	general knowledge	С
	What	is the meaning of the (normal) boiling point of a liquid?	
	A	The pressure of the liquid at 100 °C	
	В	The quantity of liquid that has reached the temperature at which it boils	
	C	The temperature at which, at normal atmospheric pressure a substance passes from the liquid state to the gaseous state	
	D	The volume of the liquid at a temperature of 100 $^{\circ}\text{C}$ and a pressure of 100 kPa (normal pressure)	
110 05.0-53	Basic	general knowledge	D
	The passage from a liquid state to a gaseous state is known as:		
	A	Condensation	
	В	Fusion	
	C	Sublimation	
	D	Evaporation	

Number	Sourc	e	Correct answer
110 05.0-54	Basic	c general knowledge	A
	Wha	t does oxidize mean?	
	A	Reaction of a substance with oxygen	
	В	Cleavage of oxygen	
	C	Reaction of a substance with hydrogen	
	D	Reaction of a substance with nitrogen	
110 05.0-55	Basic	c general knowledge	С
	Wha	t often provokes polymerization?	
	A	An inhibitor	
	В	An excess of nitrogen	
	C	An increase in temperature	
	D	A decrease in temperature	
110 05.0-56	Basic	c general knowledge	A
	liqui	on, in a tank, the vapour over a liquid is in a state of equilibrium with the d, the vapour is said to be saturated. What happens when the perature decreases?	
	A	Part of the vapour condenses	
	В	Part of the vapour solidifies	
	C	Part of the vapour freezes	
	D	Part of the vapour evaporates	
110 05.0-57	Basic	c general knowledge	A
		nmable liquids are categorized in particular by their flash points. stances in which flashpoint group are the most readily flammable?	
	A	Under 23 °C	
	В	From 23 °C to 60 °C	
	C	From 60 °C to 100 °C	
	D	Over 100 °C	

Number	Sourc	e	Correct answer
110 05.0-58	Basic	c general knowledge, 1.2.1	A
	How	is the flashpoint indicated?	
	A	In °C	
	В	In g	
	C	In m ³	
	D	In %	
110 05.0-59	Basic	c general knowledge	A
	Wha	t is the meaning of the coefficient of cubic expansion of a liquid?	
	A	Value of volume expansion of the liquid per °C	
	В	Value of the increase in weight of the liquid	
	C	Increase in vapour pressure of the liquid	
	D	Amount of vapour over the liquid	
110 05.0-60	Basic general knowledge		A
	Whe	re does the evaporation of a liquid occur?	
	A	Directly on the surface of the liquid	
	В	20 cm over the surface of the liquid	
	C	30 cm over the surface of the liquid	
	D	40 cm over the surface of the liquid	
110 05.0-61	Basic general knowledge		D
	Wha	t is the meaning of the term "viscosity" of a liquid?	
	A	Density	
	В	Colour	
	C	Miscibility	
	D	Internal friction	
110 05.0-62	Basic	c general knowledge	D
	Wha	t is the internal friction of a liquid called?	
	A	Density	
	В	Elasticity	
	C	Homogeneity	
	D	Viscosity	

Number	Source	?	Correct answer
110 05.0-63	Basic	general knowledge	С
	What	generally happens when the temperature of a substance increases?	
	A	The speed of the molecules decreases	
	В	The speed of the molecules remains the same	
	C	The speed of the molecules increases	
	D	The speed of the molecules constantly varies between fast and slow	
110 05.0-64	Basic	general knowledge	A
	At wl	hat temperature is the kinetic energy of the molecules at zero?	
	A	-273 °C	
	В	212 K	
	C	273 K	
	D	-100 °C	
110 05.0-65	Basic	general knowledge	В
		void polymerization of certain goods, a substance is added. What is the ance?	
	A	A base	
	В	An inhibitor	
	C	A catalyser	
	D	A peroxide	
110 05.0-66	Basic general knowledge		В
	What	is the mass of 1 m ³ of pure water at 4 °C?	
	A	900 kg	
	В	1,000 kg	
	C	1,100 kg	
	D	1,200 kg	
110 05.0-67	Basic general knowledge		В
	At wl	hat temperature does 1m ³ of pure water have a mass of 1,000 kg?	
	A	0 °C	
	В	4 °C	
	C	15 °C	
	D	20 °C	

Number	Source	,	Correct answer
110 05.0-68	Basic	general knowledge	С
	Why	is nitrogen a problematic gas?	
	A	Because it is flammable	
	В	Because it is heavier than air	
	C	Because it is odourless	
	D	Because it is corrosive	
110 05.0-69	Basic	general knowledge	В
	Why	should gas clouds from cargo be avoided?	
	Α	Because they always contain an explosive mixture	
	В	Because, in most cases, they lower the oxygen content	
	C	Because they are always flammable	
	D	Because they are always toxic	
110 05.0-70	Basic general knowledge		A
		th of the substances below may be absorbed by the body through the and pose a health risk?	
	A	Benzene	
	В	Butane	
	C	Castor oil	
	D	Water	
110 05.0-71	Basic general knowledge		D
		n skin enters into contact with one of the substances below, serious es result. Which substance?	
	A	Diesel fuel	
	В	Motor spirit or gasoline or petrol	
	C	Toluene	
	D	Sulphuric acid	
110 05.0-72	Basic general knowledge		С
	Whic	h of the substances below is an inert gas?	
	A	Ozone	
	В	Air	
	C	Nitrogen	
	D	Oxygen	

Number	Sourc	re	Correct answer
110 05.0-73	Basi	c general knowledge	A
	To a	void polymerization, what should be added?	
	A	An inhibitor	
	В	A catalyser	
	C	A peroxide	
	D	Heat and light	
110 05.0-74	Basi	c general knowledge	A
	Wha	t is the pH of a strong acid?	
	A	0 to 3	
	В	7	
	C	8 to 10	
	D	4 to 6	
110 05.0-75	2.1.1.1		В
	Wha	at is the characteristic of substances in class 5.1?	
	A	They are radioactive	
	В	They are oxidizing	
	C	They are corrosive	
	D	They are infectious	
110 05.0-76	Basic general knowledge		С
	Wha	t is polymerization?	
	A	A kind of polyester	
	В	A physical reaction	
	C	A chemical reaction	
	D	A catalyser	
110 05.0-77	3.2,	Table A	В
		No. 1230, METHANOL, is flammable, but also poses osidiary risk. The subsidiary risk is under which class?	
	A	Class 5.2	
	В	Class 6.1	
	C	Class 6.2	
	D	Class 8	

Number	Source	urce		
110 05.0-78	2.1.1	.1, 2.2.1	A	
	Explo	osive substances and articles are in which class?		
	A	Class 1		
	В	Class 4.1		
	C	Class 5.2		
	D	Class 6.1		

Examination objective 6: Loading, unloading and transport

Number	Sourc	e	Correct answer
110 06.0-01	1.1.3.3		В
		r fuel tanks have a capacity of 42,000 l of diesel. Are supplies in this tity considered to be dangerous goods under ADN?	
	A	Yes	
	В	No, the diesel fuel carried in the vessel's fuel tanks for the vessel's propulsion is not considered to be a dangerous substance under ADN	
	С	Quantities of supplies of this scope are subject to the same provisions of ADN as goods of class 3 packed in packages	
	D	All liquid fuels are fully subject to ADN, whatever their use	
110 06.0-02	Dele	ted (07.06.2005)	
110 06.0-03	8.3.1	.1	A
	board	ssel is transporting dangerous goods. Are persons authorized to be on d if they are not members of the crew, they do not normally live on d or are not on board for official reasons?	
	A	No, never	
	В	Yes, up to two persons	
	C	Yes, provided they do not smoke outside the accommodation	
	D	Yes, but only on boats for which certificates of approval are required	
110 06.0-04	1.1.4	1.6	В
		ng loading and unloading, are provisions other than those of ADN icable? If so, which?	
	A	No, everything is governed by ADN	
	В	Yes, local requirements, for instance the port regulations	
	С	Yes, local requirements, but only if the river or port police make a request to this effect	
	D	Yes, the port regulations, if their provisions are posted at the port entry clearly and legibly for the crews of incoming vessels	

Examination objective 6: Loading, unloading and transport

Number	Source	2	Correct answer
110 06.0-05	7.1.4	9, 7.2.4.9	В
	Can	dangerous goods be trans-shipped from one vessel to another?	
	A	No	
	В	Yes, with the authorization of the competent authority	
	C	Yes, but only if the vessel receiving the trans-shipment does not have other dangerous goods on board	
	D	Yes, if both the vessel unloading and the vessel loading the dangerous goods have given their express consent	
110 06.0-06	1.1.4	.1	В
		rding to the requirements of ADN, what packages containing erous goods may not be transported?	
	A	Packages for transport not authorized by the competent police	
	В	Packages not meeting the requirements of international regulations on dangerous goods	
	C	Packages with a packaging thickness of less than 2 cm	
	D	Fireworks	
110 06.0-07	8.3.1	.1	A
	are n	ssel is carrying infectious substances of class 6.2. Are persons who ot members of the crew, who do not normally live on board or who ot on board for official reasons authorized to be on board?	
	A	No	
	В	Yes, but only if the dangerous goods are loaded below deck and if the hatchway openings are closed	
	С	Yes, under the special provisions for class 6.2 applicable to such substances, the vessel is not subject to the provisions of 8.3.1.1 in this case	
	D	Yes, provided there is a special authorization from a competent authority	
110 06.0-08	CEV	NI, article 1.02, para. 4	A
		is responsible on board for the vessels' marking with blue s/lights?	
	A	The master	
	В	The consignor	
	C	The loading-unloading company	
	D	The shipping company	

Examination objective 6: Loading, unloading and transport

Number	Sourc	re	Correct answer
110 06.0-09	CEVNI, article 1.02, para. 4 A vessel has a blue cone/light marking. Who is responsible for removing this marking?		В
	A	The consignee	
	В	The master	
	C	The expert who issued the certificate attesting gas-free condition	
	D	The shipping company	
110 06.0-10	Dele	ted (30.09.2014)	
110 06.0-11	Dele	ted (07.06.2005)	
110 06.0-12	3.2, Tables A and C		A
		ch regulations contain the provisions relating to the marking of els carrying dangerous goods?	
	A	CEVNI or national regulations based on CEVNI, as well as ADN	
	В	CEVNI or national regulations based on CEVNI, as well as ADR	
	C	The vessel does not require any marking; on the other hand, the packages should bear danger labels in accordance with part 5 of ADN	
	D	An "international regulation" in accordance with 1.2.1 of ADN	
110 06.0-13	Dele	ted	
110 06.0-14	CEVNI, article 1.02, Paragraph 4		D
		o is responsible on board for the application of the requirements of N during the transport of dangerous goods?	
	A	The river police	
	В	The shipment's consignee	
	C	The navigation service	
	D	The master	

Number	Source		Correct answer
110 06.0-15	3.2, T	Table A and Table C, 7.1.5.0, 7.2.5.0	В
	CEVN	NI, article 3.14	
	How o		
	A	From the diagram in 9.3.1.15.2	
	В	From Table A and 7.1.5.02, or Table C and 7.2.5.0	
	C	From the checklist under 8.6.3	
	D	From the certificate of approval	
110 06.0-16	7.1.4.	9, 7.2.4.9	В
		can a cargo be trans-shipped onto another vessel outside a trans- nent place approved for this purpose?	
	A	There are no special requirements in this regard	
	В	When the competent authority has authorized it	
	C	During trans-shipment in a harbour	
	D	When it is done away from residential areas	
10 06.0-17	Basic general knowledge		С
	tempe	k holding 50,000 litres of gasoline/petrol is at 10 °C. The erature rises to 20 °C. The expansion coefficient of the ine/petrol is 0.001 per °C.	
	How 1	much gasoline/petrol is now in the tank?	
	A	50,005 litres	
	В	50,050 litres	
	C	50,500 litres	
	D	50,000 litres	
10 06.0-18	7.1.4.	9, 7.2.4.9	В
	cargo	sel loaded with dangerous goods cannot continue its voyage. The has to be trans-shipped onto another vessel outside a handling sy. What are the requirements of ADN in this case?	
	A	The cargo can be trans-shipped on site	
	В	The trans-shipment can only take place with the authorization of the competent authority	
	C	Trans-shipment is strictly prohibited	
	D	Trans-shipment may take place only in a harbour basin	

Number	Source	?	Correct answer
110 06.0-19	CEVNI, article 8.01		C
		r CEVNI or national regulations based on CEVNI, the "Do not each" signal is:	
	A	Only a sound signal	
	В	Only a light signal	
	C	A combined sound and light signal	
	D	Waving of the red flag (distress signal)	
110 06.0-20	7.1.5.	4.2, 7.2.5.4.2	В
		ned vessels for which marking is prescribed under 3.2, Table A or C (if not exempted by the competent authority) always have:	
	A	A rowing boat berthed next to the vessel	
	В	An expert in accordance with 8.2.1.2 on board	
	C	An onshore guard	
	D	A link with the nearest traffic control post	
110 06.0-21	7.1.5.	4.3, 7.2.5.4.3	В
	Your vessel has a blue cone. What distance must you maintain when waiting before a lock or a bridge?		
	A	50 m	
	В	100 m	
	C	150 m	
	D	200 m	
110 06.0-22	7.1.5.	4.3, 7.2.5.4.3	С
	Your vessel has two blue cones. What distance must you maintain when waiting before a lock or a bridge?		
	A	50 m	
	В	100 m	
	C	150 m	
	D	200 m	

Number	Source	е	Correct answer
110 06.0-23	7.1.5	5.4.2, 7.2.5.4.2	D
		t must vessels carrying dangerous goods permanently have on board a berthed, if not exempted by the competent authority?	
	A	A look-out on the shore	
	В	Contact with the nearest traffic monitoring station	
	C	An evacuation boat with oars at their side	
	D	An expert in accordance with 8.2.1	
110 06.0-24	7.1.4	1.7.1, 7.2.4.10.1, 8.6.3	В
		t is the purpose of the means of evacuation referred to in ADN in ing and unloading stations for dangerous goods?	
	A	To allow the police to board the vessel	
	В	To allow persons on board to move from danger to safety	
	C	To make it possible to reduce a leak in the cargo	
	D	To allow staff of the handling facility to move to safety on board in the event of an incident	
110 06.0-25	7.1.4	1.7.1, 7.2.4.10.1, 8.6.3	A
	-	must means of evacuation be available at loading and unloading ons for dangerous goods?	
	A	To make it possible to leave the vessel in an emergency	
	В	To allow the river police to board the vessel	
	C	To allow the vessel to be unloaded more quickly in the event of an incident	
	D	To allow small/initial fires to be tackled in time	
110 06.0-26	1.4.2	2.2.1 (d), 1.4.3.1.1 (f), 1.4.3.3 (q)	В
		is responsible for ensuring that the prescribed means of evacuation vailable at a dangerous goods loading station?	
	A	The owner of the port facility	
	В	The loader or filler, together with the carrier	
	C	The river police	
	D	The consignor or the consignee	

Number	Sourc	e	Correct answer
110 06.0-27	1.4.2	2.2.1 (d), 1.4.3.1.1 (f), 1.4.3.3 (q)	D
		is responsible for providing the means of evacuation at a dangerous is loading station?	
	A	The navigation administration	
	В	The owner of the port facility	
	C	The filler or unloader	
	D	Primarily the filler, together with the carrier	
110 06.0-28	1.4.2	2.2.1 (d), 1.4.3.7.1 (g)	D
		n must the carrier provide a second means of evacuation for the ading of UN No. 1203?	
	A	Always	
	В	Never	
	C	With the lifeboat, a second means of evacuation is always available	
	D	When the unloader has only provided one means of evacuation	
110 06.0-29	7.1.4	1.7.1, 7.1.4.77,	A
	conta	want to unload a cargo of dangerous substance UN No. 1208 in tankainers at an unloading facility that has no means of evacuation. What you do before beginning to unload?	
	A	Request authorization from the competent authority before unloading	
	В	Nothing. You unload as planned. The lifeboat is enough.	
	C	During the voyage, you purchase a lifejacket for each member of the crew.	
	D	You inform the firefighters responsible for the unloading procedure.	
110 06.0-30	7.2.4	1.10.1, 7.2.4.77	В
	A petroleum products unloading station has no means of evacuation. When can you begin to unload your tank-vessel?		
	A	When you have received the approval of the consignee	
	В	In no case	
	C	When you have launched the lifeboat	
	D	When you have received authorization from the person in charge of the shore facility	

Number	Source		Correct answer
110 06.0-31	1.2.1		В
	What	does a protection area on board a vessel consist of?	
	A	A guardrail	
	В	A water spray system	
	C	Movable bulkheads	
	D	A safe haven	
110 06.0-32	1.2.1		С
		ow long must an on-board protection area provide protection from associated with the cargo?	
	A	15 minutes	
	В	Half an hour	
	C	An hour	
	D	Until the cargo is consumed	
110 06.0-33	1.2.1,	,7.1.4.77, 7.2.4.77	A
		n is the lifeboat sufficient as the only means of evacuation during the ng or unloading of dangerous goods?	
	A	Never	
	В	Always	
	C	Only for dangerous substances of Class 2	
	D	When it is made from fire resistant material	
110 06.0-34	7.2.4.	.77, 3.2.3.2, Table C	С
	No. 1 escap	k-vessel at a loading station needs to load dangerous substance UN 830 SULPHURIC ACID containing more than 51% of acid. An er route is available outside the cargo area. Is an additional means of lation necessary?	
	A	Yes	
	В	Yes, depending on the weather conditions	
	C	No	
	D	No, depending on the number of persons on board	

Number	Sourc	re	Correct answer
110 06.0-35	7.1.4	4.77, 3.2.1 Table A	С
		ry goods vessel is carrying UN No. 1365 COTTON; WET. Which ns of evacuation are not authorized?	
	A	An escape route outside the protected area and a safe haven on board the vessel at the opposite end	
	В	An escape route inside the protected area and a safe haven on board the vessel in the opposite direction	
	C	One or more evacuation boats	
	D	A lifeboat and an evacuation boat	

Number	Source		Correct answer
110 07.0-01	5.4.1.	1, 8.1.2.1	В
	duly f the in of the	ny dangerous goods for carriage in accordance with ADN, a document filled in and issued by the consignor must be on board. It includes all formation that is required under part 5, for example, the proper name goods, the UN number/substance identification number, the class and, a assigned, the packing group.	
	What	is this document called?	
	A	Special bill of lading	
	В	Transport document	
	C	Instructions in writing	
	D	Dangerous goods manifest	
10 07.0-02	Delete	ed (03.12.2008)	
110 07.0-03	5.4.1.	1, 8.1.2.1	A
	What	is the purpose of the transport document under ADN?	
	A	To identify dangerous goods carried under ADN	
	В	As proof of delivery	
	C	As proof of approval of a vessel for the carriage of dangerous goods	
	D	As a basis for calculating freight surcharges for dangerous goods	
110 07.0-04	5.4.1.	1	A
		information on the transported dangerous goods must appear in the port document?	
	A	The information required under 5.4.1	
	В	The indications mentioned in CEVNI or in national regulations based on CEVNI	
	C	Only the indications on action to be taken in case of fire	
	D	The indications provided by the manufacturer of the dangerous goods on the physical and chemical properties of the goods	
10 07.0-05	5.4.1		С
		r ADN, of the following information, which must appear in the port document?	
	A	The address of the manufacturer of the goods	
	В	The European vessel number	
	C	The name and address of the consignee(s)	
	D	The expiration date of the certificate of approval	

Number	Source		Correct answer
110 07.0-06	5.4.1		С
	Under ADN, of the following information, which must appear in the transport document?		
	A	The address of the manufacturer of the goods and the information given by it on the physical and chemical properties of the goods	
	В	The European vessel number, the number of the vessel's inspection certificate and the number of the certificate of approval	
	C	The proper name of the goods, the UN number or the substance identification number and where assigned, the packing group	
	D	The expiry date of the certificate of approval	
110 07.0-07	5.4.3.	2	С
		ne master's duty to ensure that all the crew members concerned are ned of the instructions in writing?	
	A	No, as each crew member must, before loading, inform himself of the contents of the instructions in writing	
	В	No, guidance regarding the dangers that may arise should be given before loading by a representative of the shore facility	
	C	Yes, otherwise the persons on-board would not be able to react properly in the event of an incident	
	D	Yes, but only if the instructions in writing have to be returned to the representative of the shore facility after the loading	
110 07.0-08	8.1.2		В
	Which	documents must be on-board during the transport of dangerous goods. In of the following documents are among those that must be on-board ADN?	
	A	The general technical requirements	
	В	The transport document	
	C	The licensing regulations	
	D	A map of the route of the voyage (most recent)	
110 07.0-09	5.4.3.	2	В
		must provide the master with the instructions in writing that must be ard during the transport of dangerous goods by inland water transport?	
	A	The customs service	
	В	The carrier	
	C	The consignor	
	D	The manufacturer of the goods	

Number	Source		Correct answer
110 07.0-10	1.16.2	2.1	C
	Who		
	A	The competent police bodies	
	В	A classification society recognized by all the Contracting Parties to the ADN agreement	
	C	The competent authority of a Contracting Party to the ADN agreement	
	D	The port authority competent for the loading of the vessel	
110 07.0-11	8.1.8.	4	С
		is the maximum period of validity of a certificate of approval, not ing extensions?	
	A	Two years	
	В	Three years	
	C	Five years	
	D	Ten years	
110 07.0-12	5.4.3		D
	during loading the commust a	a aid during an accident emergency situation that may occur or arise g carriage, the carrier has to present a document to the master before ng begins. The master must ensure that all crew members understand ontent of this document and are able to apply it correctly. The master also ensure that the document is readily available in the wheelhouse. is this document called?	
	A	The ADN manifest	
	В	The certificate of approval	
	C	The transport document	
	D	The instructions in writing	
110 07.0-13	5.4.3		С
	Which document sets out the action to be taken in case of an accident or incident?		
	A	The certificate of approval	
	В	CEVNI or national regulations based on CEVNI	
	C	The instructions in writing	
	D	The transport document	

Number	Source		Correct answer
110 07.0-14	1.4.2.	.2.1, 5.4.3	В
	Who is responsible for making the instructions in writing available to the master?		
	A	The port authority competent for the loading	
	В	The carrier	
	C	The consignor	
	D	The manufacturer of the goods	
110 07.0-15	5.4.3	.1	В
	What ADN	is the purpose of the instructions in writing covered by 5.4.3.1 of ?	
	A	To replace the transport documents required under 5.4.1	
	В	To provide instructions on action to be taken in emergency situations resulting from an accident	
	C	To provide instructions on measures to observe for the stowage of dangerous goods	
	D	To provide instructions for officers or officials who check the vessel when it is carrying dangerous goods (police, customs service)	
110 07.0-16	Delet	red (03.12.2008)	
110 07.0-17	5.4.3	.1	В
		ccident has occurred with dangerous goods. Which document sets out rgent actions to be taken, if they can be taken safely in practice?	
	A	The certificate of approval	
	В	The instructions in writing	
	C	Part 1 of ADN	
	D	The transport document	
110 07.0-18	5.4.3	.4	В
		th document describes the types of danger that may arise in exceptional ions during carriage of certain dangerous goods?	
	A	The navigation certificate	
	В	The instructions in writing	
	C	The certificate of approval	
	D	Part 2 of ADN	

Number	Source		Correct answer
110 07.0-19	5.4.3.	2	С
-	The in	nstructions in writing must be in which languages?	
	A	In German and French	
	В	In English, German, Dutch and French	
	C	In one of the language(s) that the master and the expert can read and understand.	
	D	In an official language of at least one Contracting Party of the ADN agreement	
110 07.0-20	5.4.3.	1	В
		a vessel is transporting dangerous goods, where and how should the ctions in writing be kept on-board?	
	A	In my accommodation, with my licence	
	В	In the wheelhouse, in a readily available location	
	C	As a sticker on the hull or the tank in question	
	D	In a specially marked envelope in the wheelhouse	
110 07.0-21	5.4.3.	2	С
		is responsible for ensuring that the crew understands the instructions in ag and applies them correctly?	
	A	The expert	
	В	The place of loading of the dangerous goods concerned	
	C	The master	
	D	The consignor	
110 07.0-22	5.4.3.	2	С
		naster is responsible for ensuring that the instructions in writing are stood and can be carried out by whom?	
	A	The personnel on land at the place of unloading	
	В	The consignee of the goods	
	C	The members of the crew concerned	
	D	The personnel on land at the place of loading	

Number	Source		Correct answer
110 07.0-23	5.4.3.	2	A
	A ves ensuri	sel is transporting dangerous goods. What is the master responsible for ing?	
	A	The master is responsible for ensuring that the members of the crew concerned understand the instructions in writing and are capable of carrying them out properly	
	В	Under ADN the master has no special obligations related to the carriage of dangerous goods	
	C	The master has no obligations, as the members of the crew are responsible for informing themselves of the content of the instructions in writing	
	D	The master is under no special obligation to inform the crew when the vessel is specially fitted out for the dangerous goods being carried	
110 07.0-24	Delete	ed (03.12.2008)	
110 07.0-25	5.4.3.	3	A
	When	must you become aware of the content of the instructions in writing?	
	A	Before the start of loading	
	В	At the first opportunity after the vessel sets off	
	C	Immediately after an accident or incident	
	D	Immediately before unloading the dangerous goods in question	
110 07.0-26	5.4.3		С
		h accompanying document describes the dangerous characteristics of ingerous goods carried?	
	A	The certificate of approval	
	В	The ADN certificate	
	C	The instructions in writing	
	D	The ship's certificate	

Number	Source		Correct answer
110 07.0-27	5.4.1.	4.1	С
	entrie	dangerous goods are transported from the Netherlands to Austria, the s made in the transport document presented by the consignor must be at language(s) at least?	
	A	Dutch	
	В	German and Dutch	
	C	Dutch and additionally in German, French or English	
	D	German and French	
110 07.0-28	5.4.3.	1	В
	What	is done with the instructions in writing?	
	A	They should be returned after the unloading	
	В	During carriage they should be kept in the wheelhouse	
	C	Once they have been read, they are to be returned to the cargo transfer station	
	D	If possible, they are to be returned quickly to the consignee of the cargo	
110 07.0-29	5.4.3.	1	С
	Where	e must the instructions in writing be kept?	
	A	In the wheelhouse and the accommodation	
	В	In the accommodation	
	C	In the wheelhouse	
	D	In the cargo area and in the wheelhouse	
110 07.0-30	5.4.3		A
		h document describes the actions to be taken in the event of an ent or an incident?	
	A	The instructions in writing	
	В	The stowage plan	
	C	The transport document	
	D	The checklist ADN	

Number	Source	•	Correct answer
110 07.0-31	5.4.3	3	A
	be tal	nembers of the crew are responsible for finding out about the action to ken in the event of an accident or an incident with dangerous goods. h document describes this action?	
	A	The instructions in writing	
	В	The checklist ADN	
	C	The transport document	
	D	The bill of lading	
110 07.0-32	Delet	ed (03.12.2008)	
110 07.0-33	Delet	ed (03.12.2008)	
110 07.0-34	5.4.3	3	D
		re can the crew read which measures must be taken in the event of an ent or an incident?	
	A	In the transport document	
	В	In the navigation certificate	
	C	In the checklist	
	D	In the instructions in writing	
110 07.0-35	1.16.	13.2, 8.1.8.7	В
		ssel has been damaged. What authority is authorized to withdraw the icate of approval?	
	A	The river police	
	В	The authority that issued the certificate of approval	
	C	The port authority	
	D	The fire service	
110 07.0-36	1.16.1.3.1 (b), 8.1.9.1 (b)		D
	After sustaining damage, a vessel no longer meets the requirements of part 9 of ADN and is issued with a provisional certificate of approval. How long is this certificate valid?		
	A	One year	
	В	One semester	
	C	Three months	
	D	For just one voyage, and for a specified cargo	

1.18	
.1.10	D
In which document must it be mentioned that the substance carried presents a danger for the environment?	
In the certificate of approval	
In the classification certificate	
In the instructions in writing	
In the transport document	
7	In the classification certificate In the instructions in writing

Number	Source	,	Correct answe
110 08.0-01	Basic	general knowledge	В
	8.1.5	arriage of certain dangerous goods, the protection equipment under .1 is not sufficient. How does the master find out which additional ction equipment must be on board?	
	A	The information is in the measurement certificate	
	В	From the additional information provided by the consignor (e.g. the safety data sheet)	
	C	It is for masters to decide the exact composition of the equipment on the basis of indications in the transport document and their own experience	
	D	It is noted in the certificate of approval in the Section marked "miscellaneous"	
110 08.0-02	Basic	general knowledge	В
		arm has come into contact with a corrosive substance. What is the first to do?	
	A	Call the doctor	
	В	Rinse the arm carefully with water, remove clothing	
	C	See if the arm becomes red, then decide	
	D	Treat the arm with cool packs	
110 08.0-03	Basic	general knowledge	В
		n the filling pipes were disconnected, some diesel fuel landed on your . What do you do?	
	A	Let it dry in the air	
	В	Remove clothing, wash the arms with soap and water	
	C	Nothing, as diesel fuel is harmless	
	D	Call a doctor	
110 08.0-04	Basic	general knowledge	С
		ssel is carrying dangerous goods. There is an accident on the deck and son has been injured. What is the first thing to do?	
	A	Inform the shipping company	
	В	Block off the place of the accident	
	C	Keep calm and assess the general situation. Administer first aid while keeping your personal protection gear on	
	D	Inform the police	

Number	Source		Correct answer
110 08.0-05	5 Basic general knowledge		A
110 08.0-05 110 08.0-06 110 08.0-07	the ve	ssel is carrying toxic substances. Following an accident on the deck of essel with this substance, there has been personal injury. What is the hing you do?	
	A	Put on protection equipment and remove the injured from the danger area	
	В	If possible, seal the leaks	
	C	Activate the "Do not approach" signal	
	D	Read the instructions in writing	
110 08.0-06	Delet	ed (03.12.2008)	
110 08.0-07	Basic	general knowledge	A
		n the vessel is damaged large quantities of readily flammable liquids billed into the water. Are there any resulting hazards?	
	A	Yes, at the surface, gas/air mixtures may form and can catch fire and lead to explosions at very far away locations	
	В	No, as the spilled liquid evaporates immediately, the liquid in the water produces no hazard	
	C	No, the dangerous goods mix with the water; there is thus no hazard	
	D	No, at first the water is polluted, but it becomes pure again as the readily flammable liquid separates from the water by evaporation	
110 08.0-08	Basic	general knowledge	D
		nd extinguisher no longer has its safety pin. What should be done with stinguisher?	
	A	No action is necessary, its extinction capacity is the same after a short use	
	В	Nothing, the pressure of the CO ₂ tank remains the same even if the extinguisher has been used once	
	C	The hand extinguisher should have a sticker, "No longer for use with anything but small fires"	
	D	The hand extinguisher should be immediately replaced or checked by a person accredited by the competent authority	

Number	Source	?	Correct answer
110 08.0-09	9 Basic general knowledge 5.4.3.4		A
		must the master do immediately following an accident or incident ving dangerous goods?	
	A	Take the measures indicated in the instructions in writing	
	В	Inform the consignee or consignor	
	C	Inform the press	
	D	Make appropriate notes in the service book	
110 08.0-10	8.1.4		В
	A ves	ssel is carrying dangerous goods.	
	conta	vessel should have at least how many additional hand extinguishers ining a suitable fire-extinguishing agent for fighting fires involving the erous goods carried?	
	A	From one to eight additional hand extinguishers, depending on the danger presented by the dangerous goods carried. The number is indicated in the instructions in writing	
	В	At least two additional hand extinguishers	
	C	One additional hand extinguisher installed at a visible place easily accessible from the wheelhouse	
	D	Three additional hand extinguishers, to be distributed evenly in the cargo area or the protected area of the vessel	
110 08.0-11	1.3.2.	2.4	A
	certai	group of people entering the hold, or in the case of tank vessels, in in below-deck spaces, is authorized to wear a self-contained breathing ratus operating with pressurized air?	
	A	Persons trained in the handling of such devices and physically able to bear the additional constraints	
	В	All members of the crew	
	C	Only holders of the ADN specialized knowledge certificate	
	D	Any member of the crew who has undergone ABC protection training	

Number	Source		Correct answer
110 08.0-12	8.3.4		С
	A ves	sel is carrying dangerous goods. Is smoking permitted on board?	
	A	Only on board container vessels and open type-N tank vessels	
	В	Only on unladen vessels	
	C	Smoking is prohibited on board. The prohibition does not apply to the accommodation or the wheelhouse, provided their windows, doors, skylights and hatches are closed	
	D	In the trans-shipment zones smoking is prohibited, however when under way it is allowed	
110 08.0-13	8.3.4		D
	How i	s the prohibition on smoking on board made known?	
	A	Verbal notification by the master to all those on board	
	В	Not at all, as it is governed by ADN	
	C	By a regulation issued by the competent authority	
	D	By notice boards located at appropriate places on board	
110 08.0-14	8.1.6.	1	A
		earn that it has been over two years since the last time your quishers were checked. What measure should you take?	
	A	Check the extinguishers immediately, or replace them with extinguishers whose inspection certificates are still valid	
	В	The fact that the expiry date has passed poses no problem until the end of the voyage	
	C	Wait until the shipping company provides a new extinguisher	
	D	A period of one half year is allowed after the expiry date. During this period the extinguishers can be replaced or checked	
110 08.0-15	8.1.6.	1	С
	How	often should the extinguishers on your vessel be checked?	
	A	At least once a year	
	В	At least once every three years	
	C	At least once every two years	
	D	Each time the certificate of approval is extended, or if such an extension is not necessary, each time the ship's certificate is extended	

Number	Source	2	Correct answer
110 08.0-16	8.1.6	.1, General knowledge	D
	How	can you check that an extinguisher has been checked?	
	A	Using a manometer	
	В	By the indications of the pressurized gas cartridge on the inside	
	C	By the colour of the inspection plate	
	D	By the proof of inspection affixed on the extinguisher and the intact seal located on the activation handle	
110 08.0-17	Basic	general knowledge	A
	When fire?	re should you be located with the extinguisher when you are fighting a	
	A	With the wind at your back as you face the fire	
	В	With the wind at your front as you face the fire	
	C	At a distance of at least seven metres from the fire	
	D	To the side of the fire, to be able to observe how it spreads	
110 08.0-18	7.1.3	.51.2, 7.2.3.51.2	A
		e protected area and in the cargo area, the use of movable electric is is prohibited. Is it permissible to use gangway lighting in this zone?	
	A	Yes, the prohibition is not applicable to electric cables for connecting signal lights or gangway lighting, provided the socket is permanently fixed on board the vessel close to the signal mast or gangway	
	В	No, the prohibition allows no exceptions	
	C	Yes, the prohibition is applicable only to cables of a length of less than 5 \ensuremath{m}	
	D	No, the prohibition is applicable only to circuits of over 24 V	
110 08.0-19	Basic	general knowledge	С
	What filling	t purpose is served by connecting a grounding cable to a tank during g?	
	A	To provide mass for safety against overfilling	
	В	To supplement the grounding of the accumulator	
	C	To discharge static electricity	
	D	To reduce the friction between the tank wall and the liquid	

Number	Source		Correct answer
110 08.0-20	8.1.6.	1	С
	How	often do the extinguishers have to be checked?	
	A	Only after use	
	В	Annually	
	C	Every two years	
	D	When the certificate of approval is renewed	
10 08.0-21	8.1.4		D
	A ves	sel is carrying dangerous goods.	
	requir additi these	dition to the fire-fighting appliances prescribed in the general technical rements, under ADN the vessel should be equipped with at least two tonal hand extinguishers. The fire-extinguishing agent contained in extinguishers should be suitable for fighting fires involving the crous goods carried. Where in ADN can this requirement be found?	
	A	In Section 1.2.1	
	В	In Section 5.1.4	
	C	In Subsection 9.2.0.40	
	D	In Section 8.1.4	
10 08.0-22	8.3.4		A
		ssel is carrying dangerous goods. Where in ADN is the requirement to mo smoking signs set out?	
	A	In Section 8.3.4	
	В	In Section 1.2.1	
	C	In Section 5.1.4	
	D	In Chapter 3.2, Table A	
10 08.0-23	7.1.3.1/7.2.3.1		D
	You have to immediately enter a closed space where there is a lack of oxygen. What must you absolutely do?		
	A	Wear a life-saving appliance	
	В	Activate the stripping pumps	
	C	Open the hatchway cover for 1 minute	
	D	Wear a self-contained breathing apparatus	

Number	Source	,	Correct answer
110 08.0-24	Basic	general knowledge	С
	How	can the mechanical production of a spark occur?	
	A	By static electricity	
	В	By a short circuit	
	C	By metal striking metal	
	D	By raising the temperature	
110 08.0-25	Basic	general knowledge	С
	What	raises the risk of electrostatic charge?	
	A	Air bubbles in liquid	
	В	Liquid in free fall	
	C	Heating of a liquid	
	D	Stirring a liquid	
110 08.0-26	9.1.0.	74, 9.3.1.74, 9.3.2.74, 9.3.3.74	С
	Wher	re must ashtrays be provided?	
	A	Only in the accommodation	
	В	Only in bedrooms	
	C	Close to each exit of the accommodation and the wheelhouse	
	D	There is no obligation to provide ashtrays	
110 08.0-27	8.1.4		В
	techn	dition to the fire-fighting appliances prescribed by the general ical requirements, vessels subject to ADN must have additional hand guishers suitable for dangerous goods. At least how many?	
	A	1	
	В	2	
	C	3	
	D	4	
10 08.0-28	Basic	general knowledge	A
	Whic	h fire-fighting substance is also called "dry ice"?	
	A	CO_2	
	В	AFFF	
	C	Halon 1301	
	D	Spray foams	

Number	Source		Correct answer
110 08.0-29	Basic	general knowledge	D
	Why space	should the masks known as filter masks never be used in closed is?	
	A	They do not provide full face protection	
	В	They do not protect against toxic gases	
	C	They protect only against explosive gases	
	D	They are dependent on the oxygen content of the ambient air	
110 08.0-30	Basic	general knowledge	A
	How	does a powder extinguisher work?	
	A	Essentially by negative catalysis	
	В	Essentially by blocking oxygen	
	C	Essentially by cooling	
	D	Essentially by isolating oxygen	
110 08.0-31	Basic	general knowledge	С
		have to go into a space where smoke is being produced. What personal ction equipment should you choose?	
	A	Wet towels	
	В	A breathing apparatus (dependent on ambient air)	
	C	A breathing apparatus (independent from ambient air)	
	D	A dust mask	
110 08.0-32	Basic	general knowledge	В
	What	protection is meant by "appropriate eye protection"?	
	A	Simple eyeglasses	
	В	Protective goggles	
	C	A half-mask	
	D	A dust mask	
110 08.0-33	Basic	general knowledge	В
		re should crewmembers on deck go as quickly as possible if a gas leaks out?	
	A	To a place in the direction of the wind	
	В	To a place in the direction against the wind	
	C	The engine room	
	D	The accommodation	

Number	Source	,	Correct answer	
110 08.0-34	Basic	general knowledge	A	
	What	can filter masks be used for?		
	A	Work on the deck		
	В	Work in a cargo tank when the gas concentration is under 50% by volume		
	C	To enter ballast tanks		
	D	For work in closed spaces		
110 08.0-35	Basic	general knowledge	В	
		what work can filter masks be used without having previously checked xygen content?		
	A	Work in cargo tanks when the gas concentration is under 50% from the lower explosive limit and when there is sufficient oxygen in the cargo tank		
	В	Work on the deck		
	C	Work in the cofferdams		
	D	Work in the wing tanks		
110 08.0-36	Basic	general knowledge	С	
		re or how should absorbent filter masks not be used under any mstances?		
	A	On the deck		
	В	As a life-saving appliance		
	C	In closed spaces		
	D	As an escape mask		
110 08.0-37	Basic general knowledge		A	
	What is the only equipment to be used when entering spaces with oxygen levels under 21%?			
	A	A self-contained breathing apparatus		
	В	An ABEK filter mask		
	C	A P3 filter		
	D	A half-mask with a wrapped filter		

Number	Source			
110 08.0-38	Basic	general knowledge	С	
	What	extinguishing agent is suitable for fighting a gasoline/petrol fire?		
	A	An extinguishing cover		
	В	Sand		
	C	Extinguishing powder		
	D	Water		
10 08.0-39	Basic	general knowledge	A	
	A har	nd extinguisher is marked for use with fire class C. The extinguisher is cularly suited for fighting:		
	A	A gas fire		
	В	A light metal fire		
	C	A solid embers fire		
	D	A liquid fire		
10 08.0-40	Basic	general knowledge	A	
	What extinguishing agent is suitable for fighting fires in live electrical facilities?			
	A	CO_2		
	В	Foam		
	C	Extinguishing covers		
	D	Water		
10 08.0-41	Basic general knowledge		D	
	Whic	h statement is correct?		
	A	Oxygen is flammable		
	В	Oxygen is explosive		
	C	Oxygen is toxic		
	D	Oxygen is conducive to combustion		
10 08.0-42	Basic	general knowledge	C	
		fire to occur, three factors must be present. Which of the following is mong them?		
	A	Fuel		
	В	Ignition source		
	C	Nitrogen		
	D	Oxygen		

Number	Source	2	Correct answer
110 08.0-43	Basic	general knowledge	D
	When	n is it not appropriate to use an NBC powder extinguisher?	
	A	When fighting gasoline/petrol and gas fires	
	В	When fighting electrical fires	
	C	When fighting solid material fires	
	D	When fighting metal fires	
110 08.0-44	Basic	general knowledge	С
	Why	is hosing down with water used to fight fires?	
	A	It is suited for all fires	
	В	The person extinguishing the fire has to remain wet	
	C	The fire can be extinguished better thanks to the cooling effect	
	D	The fire extinction is better directed	
110 08.0-45	Basic general knowledge		D
		vessel is loaded with toxic substances. It is damaged and some cargo . What is the first thing for the master to do?	
	A	Turn off the blue light and remove the blue cones	
	В	Read the written instructions	
	C	Inform the consignee	
	D	Activate the "Do not approach" signal	
110 08.0-46	Basic	general knowledge	В
	Why	is hosing down with water used in fighting a fire?	
	A	The water has a great mechanical effect	
	В	The water has a good cooling effect	
	C	Little water is required	
	D	The fire extinction is directed well	
110 08.0-47	Basic	general knowledge	A
		t is the most appropriate fire-fighting equipment for extinguishing a n a fuse box?	
	A	CO_2	
	В	Water mist	
	C	Foam	
	D	Water	

Number	Source	?	Correct answer	
110 08.0-48	Basic	general knowledge	С	
	How	can you best check whether a fire is raging in a closed space?		
	A	Open the door		
	В	Apply a thermometer		
	C	Carefully feel the walls or door		
	D	Wait		
110 08.0-49	Basic	general knowledge	A	
		ecident occurs, causing personal injury. The person administering first nust first pay attention to what?		
	A	Hazards to himself (the person giving aid)		
	В	Whether the police have been notified		
	C	Whether the victim is lying down and dry		
	D	Whether the victim can be transported		
110 08.0-50	Basic general knowledge		A	
	A person is having difficulty breathing because of a certain substance. What is the first thing to do?			
	A	Take the person in question outside into the open air		
	В	Lie the person down in a calm place		
	C	Call the doctor		
	D	Give the person in question oxygen		
110 08.0-51	Basic	general knowledge	A	
		n someone on board has to be taken to hospital after inhaling a grous substance, what do you send with the person?		
	A	Information from the transport document on the dangerous substance in question		
	В	The service record		
	C	Passport		
	D	Personal equipment		
110 08.0-52	Basic	general knowledge	С	
	How	can toxic substances enter into the human body?		
	A	Only through the respiratory tract		
	В	Only through the nose and mouth		
	C	Through the nose, mouth and skin		
	D	Only through the mouth		

Number	Source	Correct answer	
110 08.0-53	Basic	general knowledge	A
	What is the first thing to do when someone loses consciousness?		
	A	Loosen any tight clothing on the person	
	В	Initiate mouth-to-mouth resuscitation	
	C	Put a blanket over the person	
	D	Clear out the person's mouth	
110 08.0-54	Basic	general knowledge	D
	Why	should clothing not be removed from a burn victim?	
	A	The person could become cold	
	В	The person's clothing could be lost	
	C	It would add to the person's pain	
	D	To avoid making the wound bigger	
110 08.0-55	Basic	general knowledge	D
		t is generally the first thing to do when parts of the body have come contact with dangerous goods?	
	A	Treat with a burn cream	
	В	Go to an ambulance station	
	C	Keep the parts of the body in question warm	
	D	Rinse abundantly with water	
110 08.0-56	Delet	ted (03.12.2008)	
110 08.0-57	Basic	general knowledge	D
	What	t must be done when acid has come into contact with a person's eyes?	
	A	Cover the eyes with dry gauze	
	В	Cover the eyes with wet gauze	
	C	Apply an ophthalmic ointment	
	D	Rinse abundantly with water	

Number	Source		Correct answer	
110 08.0-58	Basic	D		
	What by so			
	A	Give the person a glass of water to drink		
	В	Give the person a glass of milk to drink		
	C	Give the person a glass of water to drink with two spoonfuls of salt dissolved in it		
	D	Induce vomiting		
110 08.0-59	Basic	general knowledge	D	
	What	is an example of first aid for burns?		
	A	Apply a burn ointment		
	В	Grease the skin		
	C	Remove clothing		
	D	Rinse abundantly with cold water		
110 08.0-60	Deleted (03.12.2008)			
110 08.0-61	Basic general knowledge		С	
	What is the only thing to use to cool burns?			
	A	Disinfectants		
	В	Heavy water		
	C	A lot of water		
	D	A soapy solution		
110 08.0-62	Basic	general knowledge	A	
	What	describes a loss of consciousness?		
	A	The victim does not react, or hardly reacts		
	В	The victim looks blue		
	C	The pulse and breathing have stopped		
	D	The victim is no longer breathing		
110 08.0-63	Basic	general knowledge	D	
	How are eyes treated that have been in contact with dangerous goods?			
	A	Padding them dry		
	В	Having the victim drink milk		
	C	Rinsing abundantly with a saline solution		
	D	Rinsing abundantly with water		

Number	Source	Correct answer	
110 08.0-64	Basic	С	
	A per board	rson has swallowed a toxic substance. How do you treat the person on d?	
	A	You pump the person's stomach	
	В	You give the person some stomach tablets	
	C	You have the person drink a lot of water	
	D	If it was an acid, you have the person drink a base, and vice versa	
110 08.0-65	Basic	general knowledge	С
	What	t first aid should be administered when consciousness is lost?	
	A	Calm the person who has fainted, and cool the person	
	В	Seek out the cause and take steps to avoid further loss of consciousness in the future	
	C	Put the person in a position lying on one side to avoid asphyxiation, and check that the victim continues to breathe	
	D	Make the person breathe and/or provide the person with oxygen	
110 08.0-66	Basic	general knowledge	С
	What action should be taken if victims who have swallowed corrosive substances lose consciousness?		
	A	In all cases, induce vomiting	
	В	In some cases, induce vomiting	
	C	Never induce vomiting	
	D	Administer acid	
110 08.0-67	Basic general knowledge		D
	What do you do in the event of an accident involving electricity?		
	A	Wait for an expert to arrive	
	В	Think only of your own safety	
	C	Try to reduce the voltage	
	D	Try, safely, to turn off the current	

Number	Source		Correct answer	
110 08.0-68	Basic	general knowledge	В	
	What			
	A	Assess the danger, do not consider material damage, calm the victim directly at the place of the accident		
	В	Assess the danger, determine the state of the victim, if possible aid the victim on the spot, calm the victim		
	C	Administer proper first aid, in no case give information to the police, determine the state of the victim, assess the danger		
	D	Administer first aid, offer to help the police and the emergency services personnel, notify other vessels		
110 08.0-69	Basic	general knowledge	В	
	You a	assume that someone is in shock. What do you do?		
	A	You let him cool his head with a lot of water		
	В	You do not let him cool himself or drink		
	C	You have him lie down with something cool supporting his neck		
	D	You have him run hard so that he remains warm		
110 08.0-70	Basic	В		
	What is the purpose of first aid?			
	A	Avoid disability		
	В	Avoid more serious injury		
	C	Put teaching into practice		
	D	Self-affirmation		
110 08.0-71	Basic	general knowledge	С	
	What			
	A	Apply powder		
	В	Cover in blankets		
	C	Cool with water		
	D	Cover with grease		

Number	Source			
110 08.0-72	Basic general knowledge			
		A person has been injured by a dangerous shipment. In this case what documents should you have him give the doctor?		
	A	Passport		
	В	The service record		
	C	Information from the transport document on the dangerous substance in question		
	D	The certificate of approval		
110 08.0-73	8.1.5.	3	В	
		sher tug is pushing four pushed barges. Two barges are loaded with sive substances of class 8. Where should the special equipment be		
	A	On all four barges		
	В	Only on the pusher tug		
	C	On the two barges loaded with dangerous substances and on the pusher tug		
	D	On at least one of the barges		
110 08.0-74	8.1.5.	1	D	
	For whom must there be appropriate life-saving appliances on board?			
	A	For persons on board who do not hold an ADN certificate		
	В	Only for the crew		
	C	For each member of the crew and for officials carrying out supervisory functions		
	D	For every person on board		
110 08.0-75	7.1.3.41.1, 7.2.3.41.1		С	
	The use of fire or naked light is prohibited most places on board. Where can fire or naked light be used?			
	A	In the accommodation and the engine rooms		
	В	In the engine rooms and service spaces		
	C	In the accommodation and the wheelhouse		
	D	In the engine rooms and the wheelhouse		

Number	Source	2	Correct answer
110 08.0-76	1.3.2	.2.4	С
	A tank vessel is carrying dangerous goods. Access to certain areas below deck in the cargo area is only authorized to persons with a breathing device independent of the ambient air. Which persons are authorized to wear such breathing devices?		
	A	Only holders of a certificate of special knowledge of the ADN	
	В	All members of the crew	
	C	Persons trained in the use of these devices and physically able to deal with the additional constraints	
	D	All members of the crew who have followed an NBC training	

Examination objective 9: Stability

Number	Source	Correct answer
110 09.0-01	9.1.0.93.2, 9.2.0.93.2, 9.3.3.13.2	С
	On what basis should the basic values for the stability calculation be determined?	
	A Only by means of an inclining experiment conducted when th vessel is fully loaded	e
	B Only by means of an inclining experiment conducted before the vessel is equipped	he
	C By means of an inclining experiment or detailed mass and moment calculation	
	D Only by means of a calculated inclining experiment	
110 09.0-02	9.1.0.93.2, 9.2.0.93.3, 9.3.1.13.2, 9.3.2.13.2, 9.3.3.13.3	A
-	What is the purpose of the intact stability calculation?	
	A To provide proof of sufficient stability for all stages of loading of the vessel	g
	B To provide proof of sufficient stability solely for the vessel loading stage	
	C To provide proof of sufficient stability solely when the vessel loaded with containers	is
	D To provide proof of sufficient stability solely when the vessel loaded to less than 50% of the maximum draught	is
110 09.0-03	9.1.0.95.2, 9.2.0.95.2, 9.3.3.15.2	D
	After damage, at the stage of equilibrium (final stage of flooding), what is the maximum permissible angle of heel of a double-hull vessel?	
	A 6 degrees	
	B 8 degrees	
	C 10 degrees	
	D 12 degrees	

Examination objective 9: Stability

Number	Sourc	Correct answer	
110 09.0-04	9.1.0	0.95.3	В
	maxi confe	he stage of equilibrium (final stage of flooding), what is the imum permissible angle of heel of a double-hull cargo vessel forming to the additional construction rules set forth in ADN and led with containers which have not been secured?	
	A	3 degrees	
	В	5 degrees	
	C	6 degrees	
	D	12 degrees	
110 09.0-05	7.2.4	1.21.3	С
	3.2.3 2. The certific vesses	maximum permissible degree of filling of the tank according to 3.2, table C is 95%, the relative density of the cargo to be loaded is ne maximum permissible relative density according to the ficate of approval is 1. However, the substance appears in the el's substance list. The vessel has 4 cargo tanks. What filling is issible?	
	A	95% for all cargo tanks	
	В	Cargo tanks 1 and 3 at 95% and cargo tanks 2 and 4 empty	
	C	All the cargo tanks at 50%	
	D	All cargo tanks empty since carriage of the substance is not allowed	
110 09.0-06	Gene	eral knowledge	В
		le going through a curve, centrifugal force causes the vessel to list ficantly. How can the list be reduced in a reliable way?	
	A	By steering in the opposite direction	
	В	By reducing speed	
	C	By increasing speed	
	D	By reducing the radius of the turn	

Examination objective 9: Stability

Number	umber Source		Correct answer	
110 09.0-07	7.2.3.15		D	
	board. The motor degassed. The ta	ister responsible for a convoy is the only expert on rized tank vessel has been unloaded but not yet nk barge has to be unloaded in a service installation. tank vessel allowed to leave?		
		only required that one member of the crew who is the situation stays with the tank barge		
	expert and	e principal master stays on board the tank barge as an d one of the other masters on board takes charge of ized tank vessel		
	C No, there vessels	must be masters who are also experts on board both		
	shore who	expert is made available on the tank barge from the is responsible for loading and unloading as well as of the tank barge		
110 09.0-08	7.2.3.20.1		С	
	compartment, ha	e tanks of which do not have a median longitudinal s to take on ballast in the double-hull spaces to nal. Is this operation allowed?		
		sting of tank vessels with no median longitudinal nent is strictly prohibited		
	B Yes, if the	e ballast tanks are filled before loading		
		has been taken into account in the intact and damage alculations and this is allowed for the substance		
	D Yes, if the	e ballast tanks are not carrying any cargo		
110 09.0-09	Basic general kn	owledge	A	
	What effect does considerable length or short length have on the stability of a vessel?			
	A Negative	effect		
	B Positive e	ffect		
	C Neutral et	ffect		
	D Passive et	ffect		

General

Examination objective 9: Stability

Number	Source	e	Correct answer
110 09.0-10	Basic	c general knowledge	В
	•	what calculation procedure is the common centre of gravity for ral bodies determined?	
	A	Percentage calculation	
	В	Moment calculation	
	C	Buoyancy calculation	
	D	Experimental calculation	
110 09.0-11	Basic	c general knowledge	В
	Wha	t do you understand by "stability of a vessel"?	
	A	The capacity of the steel hull of a vessel to bend and then return to its original form	
	В	The capacity of a vessel to right itself from a listing position	
	C	The solidity of the vessel's hull in relation to the solidity of the material and to the wear and tear of the material	
	D	The solidity of the transversal and longitudinal reinforcements in relation to the stress suffered by the vessel's hull	
110 09.0-12	Basic	c general knowledge	D
	Wha	t may constitute a threat to the stability of a vessel?	
	A	A large freeboard	
	В	Slow speed in a curve	
	C	A low centre of gravity	
	D	Free liquid surfaces in the vessel	
110 09.0-13	Basic	c general knowledge	С
	Wha	t improves the stability of a vessel?	
	A	A high centre of gravity	
	В	Small distance above the waterline	
	C	A low centre of gravity	
	D	A small freeboard	

General

Examination objective 9: Stability

Number	Sourc	ce	Correct answer
110 09.0-14	Basi	c general knowledge	C
		en does the intact stability of a double hull vessel have to be ked?	
	A	At every change of crew	
	В	Every hour, based on fuel consumption	
	C	Before every modification of the weight of the cargo	
	D	Only at each planned visit to the shipyard	
110 09.0-15	1.2.1	1, 9.3.2.13.3, 9.3.3.13.3	В
	Wha	nt makes up the damage control plan?	
	A	The placement of extinguishers and other rescue measures	
	В	All the closing devices which have to be closed during the journey	
	С	All the electrical installations which have to be switched off in the event of a leak	
	D	The number of operations carried out to stop leaks	
110 09.0-16	Basi	c general knowledge	A
	Whe	ere is the weight of the vessel in its unloaded state indicated?	
	A	In the documents concerning stability	
	В	In the megatest	
	C	In the certificate of approval	
	D	In the certificate of inspection	
110 09.0-17	Gene	eral knowledge	D
	Wha	at is the "residual safety distance" of a vessel?	
	A	The residual safety distance indicates the distance between the transversal and longitudinal reinforcements '	
	В	The residual safety distance indicates the force of the residual lift of the vessel	
	C	The capacity of the vessel to keep above the water a part of the volume which displaces water	
	D	When the vessel is listing, the vertical distance between the water level and the lowest point of the submerged side, above which the vessel can no longer be considered watertight	

General

Examination objective 9: Stability

Number	Sourc	ce	Correct answer
110 09.0-18	Basi	c general knowledge	A
_	Wha	at types of stability characterize intact stability?	
	A	Stability of form and stability of weight	
	В	Stability of the keel	
	C	the flexing of the vessel	
	D	the stability of the course	
110 09.0-19	Gene	eral knowledge	С
	Wha	at forces are determinant for the stability of the trim of a vessel?	
	A	The level force of the central part of the vessel	
	В	The angle of list of the vessel	
	C	The forces of gravity F_p and lift F_p	
	D	The angle of trim of the vessel	
110 09.0-20	Gene	eral knowledge	D
	Wha	at factor is determinant for the stability of a vessel?	
	A	Mass	
	В	Lift	
	C	The centre of gravity of the waterline	
	D	The metacentre of the vessel	
110 09.0-21	Gen	eral knowledge	С
	Wha	at is the general effect of free surfaces on the stability of a vessel?	
	A	Positive effect	
	В	No effect	
	C	Negative effect	
	D	Hardly noticeable effect	

Number	Sourc	e	Correct answer
120 02.0-01	7.1.3.31 A dry cargo vessel is transporting dangerous goods in packages. May portable stripping pumps running on liquid fuel be used outside the protected area?		В
	A	No	
	В	Yes, if the liquid fuel has a flashpoint of 55 °C or above	
	C	Yes, if the hold hatchways are closed	
	D	Yes, if the packages do not include goods of Class 1	
120 02.0-02	9.1.0).11.1 (a)	В
		what should the holds of dry cargo vessels transporting dangerous ls be bounded fore and aft?	
	A	Cofferdams	
	В	Watertight metal bulkheads	
	C	Pseudo cofferdams	
	D	Wooden bulkheads	
120 02.0-03	9.1.0	0.34.1	A
		that minimum distance from the hatchway openings should the ust outlets of internal combustion engines be located?	
	A	2.00 m	
	В	2.50 m	
	C	3.00 m	
	D	1.00 m	
120 02.0-04	9.1.0.11.1		С
		hold should be bounded fore and aft by bulkheads. How should bulkheads be?	
	A	Gastight	
	В	Spray proof	
	C	Watertight	
	D	Dustproof	

Number	Source	e	Correct answer
120 02.0-05	9.1.0.11.3		В
		y cargo vessel is transporting dangerous goods. May tarpaulins be to cover the hatchways of the holds concerned?	
	A	No	
	В	Only if the tarpaulins do not readily ignite	
	C	Only if the dangerous goods are transported in packages	
	D	Only if an additional ventilator is installed in the hold to prevent the formation of water condensation	
120 02.0-06	9.1.0	.12.1	A
	capal	cargo vessels transporting dangerous goods must in many cases be ble of ventilating the holds mechanically. What capacity should the lators have?	
	A	Together they should provide at least five changes of air per hour based on the volume of the empty hold	
	В	Together they should provide at least 10 changes of air per hour based on the volume of the empty hold	
	C	There is no requirement in respect of ventilation capacity	
	D	This depends whether the ventilator fan extracts air from the hold or blows fresh air into the hold	
120 02.0-07	9.1.0	0.32.1	С
	May tanks	the double bottoms within the hold area be arranged as oil fuel s?	
	A	No, this is prohibited	
	В	No, unless specifically authorized by the competent authority	
	C	Yes, provided that their height is not less than 0.60 m and that the pipes and openings to such tanks do not penetrate the holds	
	D	Yes, provided that their height is not less than 0.50 m and that the pipes and openings to such tanks do not penetrate the holds	

Number	Source		Correct answer
120 02.0-08	9.1.0.4	40.1	D
	_	erous goods are being transported on a barge without its own s of propulsion. Are fire pumps required on board?	
	A	Yes, at least two fire pumps permanently installed	
	В	No, no fire pumps	
	C	Yes, at least one manual fire or ballast pump in the protected area	
	D	Yes, at least one fire or ballast pump	
120 02.0-09	9.1.0.4	40.2	A
		e rooms are provided with a permanently fixed fire-extinguishing n. From which point should it be possible to activate it?	
	A	From a suitable location outside the premises to be protected	
	В	From the wheelhouse	
	C	From the entrance to the engine room	
	D	From the accommodation	
120 02.0-10	9.1.0.4	40.1	D
	to ensu	what should the piping of the fire-extinguishing system be fitted ure that no gases can escape from the cargo zone through the fire-uishing system into the accommodation or service spaces?	
	A	A lid	
	В	A valve	
	C	A stop valve	
	D	A spring-loaded non-return valve	
120 02.0-11	9.1.0.4	41.2	A
		appliances may be used for cooking on board dry cargo vessels ng dangerous goods?	
	A	Electrical appliances	
	В	Gas-fuelled appliances	
	C	Appliances fuelled with liquid fuels	
	D	Appliances fuelled with liquid or solid fuels	

Number	Source	Correct answer
120 02.0-12	7.1.3.70.2	
	What minimum distance should be maintained between dangerous substances or articles of Class 1 and aerials for electronic apparatuses on board dry cargo vessels?	
	A 3.00 m	
	B 2.00 m	
	C 4.00 m	
	D 1.00 m	
120 02.0-13	9.1.0.74.3	D
	What should be provided close to each exit of the accommodation and the wheelhouse on board a dry cargo vessel?	
	A A sign bearing the text: "Please close this door immediately"	
	B A sign bearing the text: "May be opened without the master's permission. After opening, close immediately"	
	C A sign bearing the text: "Do not open without the master's permission"	
	D An ashtray	
120 02.0-14	9.1.0.91.2	A
	On dry cargo vessels conforming to the additional construction rules for double-hull vessels set forth in ADN, what minimum distance should be respected between the sides of the vessel and the longitudinal bulkheads of the hold if no additional reinforcements have been made compared with the scantlings specified in the rules for construction published by a recognized classification society?	; ;
	A 0.80 m	
	B 0.90 m	
	C 1.00 m	
	D 1.10 m	
120 02.0-15	Deleted (29.03.2012)	
120 02.0-16	Deleted (29.03.2012)	

Number	Source	Correct answer
120 02.0-17	9.1.0.91.3	С
120 02.0-18	On a double-hull dry cargo vessel conforming to the additional construction rules on double-hull vessels set forth in ADN, what should the depth of the double bottom be?	
	A It should correspond to the width of the double-hull space	
	B It should not exceed 0.50 m	
	C It should be at least 0.50 m	
	D It should be at least 0.60 m	
120 02.0-18	9.1.0.91.1	В
	How should the protected area of a double-hull dry cargo vessel conforming to the additional construction rules on double-hull vessels set forth in ADN be arranged?	
	A It should be built with double-hull spaces	
	B It should be built with double-hull spaces and a double bottom	
	C It should be equipped with double-hull spaces and a double bottom in the engine room	
	D It should at least be built with double-hull spaces and a double bottom, and double-hull spaces in the engine room	
120 02.0-19	9.1.0.91.3	A
	In dry cargo vessels conforming to the additional construction rules on double-hull vessels set forth in ADN and equipped with suction wells with a capacity of 0.04 m³, what should the minimum space between the bottom of the vessel and the bottom of the suction well be?	
	A 0.40 m	
	B 0.50 m	
	C 0.30 m	
	D 0.60 m	
120 02.0-20	Deleted (2012)	
120 02.0-21	Deleted (2012)	
120 02.0-22	Deleted (2012)	

Number	Source	Correct answer
120 02.0-24	9.2.0.34.1	В
	Under ADN, on seagoing vessels complying with Chapter II-2, Regulation 54, of the SOLAS requirements, where should the exhaust pipe outlets be located?	
	A They should be located not less than 1 m from the hold hatchways	
	B They should be located not less than 2 m from the hold hatchways	
	C They should always be located behind the wheelhouse	
	D They should be located not less than 3 m from the hold hatchways	
120 02.0-25	9.1.0.41.2	A
	Under ADN, when are cooking appliances permitted in the wheelhouse of a dry cargo vessel?	
	A When the wheelhouse has a metal floor	
	B Such appliances are absolutely prohibited	
	C When the separation distance between the wheelhouse and the holds is at least 4 m	
	D When the separation distance between the wheelhouse and the holds is at least 3 m	
120 02.0-26	9.1.0.17.2	С
	On board a dry cargo vessel, what provisions apply to accommodation doors facing the holds?	
	A It must be windowless	
	B It must be sprung to ensure that it can close immediately after being opened	
	C A gastight closing appliance must be provided	
	D A watertight closing appliance must be provided	

Number	Source	Correct answer
120 02.0-27	7.1.4.1.1, 7.1.4.1.3	A
Number 120 02.0-27 120 02.0-28	Which statement applies to the transport of goods of Class 7, with the exception of UN Nos. 2912, 2913, 2915, 2916, 2917, 2919, 2977, 2978 and 3321 to 3333?	
	A They may only be transported by double-hull vessels conforming to the additional rules set forth in ADN	
	B They may only be transported by vessels with steel hatchways	
	C Pursuant to ADN, they may be transported either by single-hull or double-hull vessels	
	D They may only be transported by vessels with aluminium hatchways	
120 02.0-28	9.1.0.12.1	В
	Dangerous goods for which additional ventilators are prescribed need to be transported. Where should the extraction ducts be positioned?	
	A The extraction ducts should be positioned at least 1 m above the bottom of the hold	
	B The extraction ducts should be positioned at the extreme ends of the hold and extend down to not more than 50 mm above the bottom	
	C The extraction ducts should be positioned at the front of the hold and extend down to not more than 50 mm above the bottom	
	D The extraction ducts should be positioned at the back of the hold and extend down to not more than 50 mm above the bottom	
120 02.0-29	9.1.0.20	D
	On board a dry cargo vessel with double-hull spaces and a double bottom, may the double-hull spaces be arranged as ballast tanks?	
	A No, the double-hull spaces serve as a safety area and should therefore always be empty	
	B No, because if the double-hull spaces were filled with water, the stability of the vessel would be jeopardized	
	C Yes, since the double-hull spaces can be emptied in 30 minutes	
	D Yes, the double-hull spaces may be arranged for being filled with water ballast	

Number	Source	•	Correct answer
120 02.0-30	9.1.0.40.3		A
	exting	r Section 8.1.4 of ADN, there must be two additional hand fire- guishers on board a dry cargo vessel transporting dangerous s. Where should these two additional extinguishers be located?	
	A	In the protected area or nearby	
	В	Outside the protected area	
	C	Outside the wheelhouse, so that, in case of emergency, they can be located rapidly and used also by other persons	
	D	In an appropriate place designated by an expert	
120 02.0-31	9.1.0.	41.1	С
		r ADN, should the outlets of funnels on dry cargo vessels have fic equipment?	
	A	Yes, devices to prevent the escape of sparks	
	В	Yes, devices to prevent the entry of water	
	C	Yes, devices to prevent the escape of sparks and the entry of water	
	D	No, ADN contains no stipulations in this regard	
120 02.0-32	9.1.0.	52.1	D
	in the	provisions of ADN apply to electrical equipment which is located protected area on the deck of a dry cargo vessel and cannot be ed by means of a central switch?	
	A	It should be of the "certified safe" type	
	В	It should be fireproof in accordance with IEC 60079-1A	
	C	It should be watertight to prevent short circuits	
	D	It should be of the "limited explosion risk" type	

Number	Sourc	re	Correct answer
120 03.0-01	3.2.1	, Table A, 7.1.6.12	С
		essel is transporting UN No. 1435 ZINC ASHES in bulk. What must one during the voyage?	
	A	Leave the windows and doors open	
	В	Seal the holds so as to ensure that no gas escapes	
	C	Ventilate the spaces adjacent to the holds containing the zinc ashes	
	D	Degas the holds every half hour	
120 03.0-02	7.1.4	1.12.1	D
		-ro-vessel is loaded with vehicles. How many times per hour must ir be replaced?	
	A	30 times	
	В	20 times	
	C	10 times	
	D	5 times	
120 03.0-03	3.2.1	, Table A, 7.1.6.12	С
		essel is transporting UN No. 2211 POLYMERIC BEADS, ANDABLE, packaged. When must the holds be ventilated?	
	A	Always, when the goods are stowed in the holds	
	В	Throughout the voyage, for 15 minutes per hour	
	C	Where after measurement it has been established that the concentration of gases exceeds 10% of the lower explosive limit	
	D	Where after measurement it has been established that the concentration of gases is less than 10% of the lower explosive limit	
120 03.0-04	3.2.1	, Table A, 7.1.6.12	A
	with conc	essel is transporting UN No. 1408 FERROSILICON in bulk or out packaging. After measurement it is established that the entration of gases exceeds 10% of the lower explosive limit. How ld the holds be ventilated?	
	A	With the ventilators operating at full power	
	В	With the ventilators on standby	
	C	For 15 minutes per hour	
	D	Once every 8 hours	

Number	Source	2	Correct answer
120 03.0-05	3.2.1	, Table A, 7.1.6.12	A
	1408	y cargo vessel with four holds is transporting 300 tonnes of UN No. FERROSILICON in bulk in hold 2. Which holds or spaces should entilated for the voyage?	
	A	Hold 2 and all adjacent holds and spaces	
	В	Hold 2	
	C	All the holds, i.e. holds 1, 2, 3 and 4	
	D	This bulk cargo does not require ventilation	
120 03.0-06	3.2.1	, Table A, 7.1.6.12	D
	POW that t	ssel is transporting UN No. 1398 ALUMINIUM SILICON /DER, UNCOATED, in bulk. After measurement it is established he concentration of gases given off by the cargo exceeds 10% of ower explosive limit. What should be done with the holds?	
	A	The holds should be ventilated	
	В	The holds should be ventilated with a ventilator	
	C	The holds should not be ventilated	
	D	The holds should be ventilated with the ventilators operating at full power	
120 03.0-07	3.2.1	, Table A, 7.1.6.16	С
		No. 2211 POLYMERIC BEADS, EXPANDABLE must be aded. The cargo is being carried in bulk.	
	Whice begin	th of the following measures should be taken before unloading may a?	
	A	The windows and doors of the accommodation should be hermetically sealed to prevent toxic substances from escaping	
	В	The master should measure the concentration of gases in the holds concerned	
	C	The consignee should measure the concentration of gases in the holds concerned	
	D	The consignee should measure the toxicity in the holds concerned	

Number	Source	Correct answer
120 03.0-08	3.2.1, Table A, 7.1.6.16	D
	UN No. 2211 POLYMERIC BEADS, EXPANDABLE must be unloaded. The cargo is being carried in bulk. Below what value must the concentration of gases be before unloading may be started?	ust
	A At least 10% below the lower explosive limit	
	B At least 20% below the lower explosive limit	
	C At least 40% below the lower explosive limit	
	D At least 50% below the lower explosive limit	
120 03.0-09	3.2.1, Table A, 7.1.6.12, 7.1.6.16	A
	UN No. 2211 POLYMERIC BEADS, EXPANDABLE must be lo The cargo is being carried in bulk. When should the concentration gases be measured?	
	A Immediately after loading and one hour later	
	B Every eight hours after loading	
	C During loading, up to one hour after loading and then one h prior to unloading	our
	D During transport, there is no need to make measurements	
120 03.0-10	3.2.1, Table A, 7.1.6.12	В
	A dry cargo vessel is carrying UN No. 2211 POLYMERIC BEAD EXPANDABLE.	S,
	The cargo is being carried in bulk. During the voyage, the concentrof gases must be measured in the holds where the polymeric beads expandable, are located.	
	What measures should be taken if the gas concentration is 20% about the explosive limit?	ove
	A Inform the competent authority	
	B Ventilate the holds	
	C Inform the consignee of the cargo or the loader	
	D No additional measures, since the maximum value is 50% of lower explosive limit	of the

Number	Source	?	Correct answer
120 03.0-11	3.2.1	, Table A, 7.1.6.12	D
	norm	No. 1408 FERROSILICON is being transported in bulk. Under al conditions of operation, when should the concentration of gases a hold be measured?	
	A	Never	
	В	Immediately after loading, one hour later and then every eight hours	
	C	Immediately after loading, one hour later and then every hour	
	D	Immediately after loading and one hour later	
120 03.0-12	7.1.4	.15.1	D
		er what conditions is it necessary to clean the hold according to when carrying bulk?	
	A	When the previous cargo comprised goods of Class 4.1	
	В	When the previous cargo comprised goods of Class 4.2	
	C	When the previous cargo comprised goods of Class 4.3	
	D	When the new cargo comprises the same goods as the previous cargo	
120 03.0-13	3.2.1	, Table A, 7.1.6.12	A
		No. 3101 ORGANIC PEROXIDE TYPE B, LIQUID, is being ported in a dry cargo vessel.	
		ld the accommodation be ventilated, bearing in mind the nature of goods?	
	A	No, this is not necessary	
	В	Yes, this is prescribed for these goods	
	C	No, unless the goods are loaded in bulk	
	D	Yes, if the goods have escaped	
120 03.0-14	7.1.4	.15.1	В
		ld is contaminated after goods of Class 9 have been unloaded. What d be done?	
	A	The hold should be cleaned with a specialized cleaning product before new cargo may be loaded	
	В	The hold should be carefully cleaned unless the next cargo is the same as the previous bulk cargo	
	C	The hold should be carefully cleaned unless the new cargo comprises goods of Class 8	
	D	The hold should always be decontaminated by a specialized company before new cargo may be loaded in it	

Number	Source		Correct answer
120 03.0-15	3.2.1,	Table A, 7.1.6.11	C
		To. 2506 POTASSIUM HYDROGEN SULPHATE is being ported in bulk.	
	What	measures should be taken in respect of the holds?	
	A	Prior to loading, the holds should be ventilated for at least one hour	
	В	Prior to loading, the holds should be specially dried	
	С	The inner surfaces of the holds should be lined or coated so as to prevent corrosion	
	D	The inner surfaces of the holds should be lined or coated such that they are not liable to impregnation by the cargo	
120 03.0-16	3.2.1,	Table A, 7.1.6.11	D
	UN N	Io. 1334 NAPHTHALENE, CRUDE, is being transported in bulk.	
	What	measures should be taken in respect of the holds?	
	A	Prior to loading, the holds should be wiped so as to ensure that they are free of water	
	В	Prior to loading, the holds should be ventilated with an inert gas such that they are not flammable during loading	
	C	The inner surfaces of the holds should be lined or coated so as to prevent corrosion	
	D	The inner surfaces of the holds should be lined or coated such that they are not readily flammable and not liable to impregnation by the cargo	
120 03.0-17	7.1.3.	51.4	В
		cargo vessel is transporting explosive substances and articles. must be done with all the electrical installations in the holds?	
	A	They should be removed from the protected area	
	В	They should be switched off in the holds and protected against unintentional connection	
	C	Electrical installations normally located in the holds should be removed	
	D	They should be switched off in the holds during loading and unloading	

Number	Source	Correct answer
120 03.0-18	7.1.4.12.2	С
	A dry cargo vessel is transporting some containers containing goods of Class 5.2. When should the open holds be ventilated?	
	A For this cargo, the holds should always be ventilated	
	B On container ships with open holds, the holds need never be ventilated	
	C The holds should be ventilated where damage to a container or release of content inside the container is suspected	
	D For this cargo, the holds only need to be ventilated during loading and unloading	
120 03.0-19	7.1.4.12.2	D
	A dry cargo vessel is transporting some containers containing goods of Class 3. It seems that one of the containers is not leakproof. What measures should be taken on board?	
	A The outlets of the engine room and the accommodation doors and windows should be closed immediately	
	B The container should be covered with a sheet	
	C The container should be sprayed in order to cool it	
	D The hold should be ventilated	

Number	Source	Correct answer
120 06.0-01	5.2.2.2.2	D
	(yellow/white/black)	
	What does the above label mean?	
	A The dangerous goods in question are flammable (liquid substances)	
	B The dangerous goods in question are flammable (solid substances)	
	C The dangerous goods in question are corrosive	
	D The dangerous goods in question are radioactive	
120 06.0-02	3.3.1 Special provision 800	С
	A vessel is transporting oil seeds, crushed seeds and seedcake containing vegetable oil, treated with solvents, not subject to spontaneous combustion. Are these goods subject to ADN?	
	A Plant products are not dangerous goods since they are not mentioned in ADN	
	B Yes, in all cases, even if they have been prepared or treated to ensure that they cannot give off dangerous gases in dangerous quantities (no risk of explosion) during transport	
	C In principle, yes, unless they have been prepared or treated to ensure that they cannot give off dangerous gases in dangerous quantities (no risk of explosion) during transport. If this is mentioned in the transport document, they are not subject to ADN	
	D Yes, unless prior to loading they have been stored in dry air for at least three days	
120 06.0-03	5.2.2.2., 5.3.4	С
	Packages may bear RID, ADR or IMDG Code danger labels. Where can the meaning of these danger labels be found?	

- A In CEVNI, annex 3
- В In the transport document under Section $5.4.1\ of\ ADN$
- C In ADN, Part 5
- D In the approval certificate

Examination objective 6: Loading, unloading and transport


Number	Source	Correct answer
120 06.0-04	5.2.2.2.2	C
	Which danger label does a package containing flammable liquids of Class 3 bear?	
	A (black/white)	
	B (black/white/red)	
	B (black/white/red) C (black/red)	

(black/white/red)

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-05	5.2.2.2.2	С

Which danger label is used for dangerous goods of Class 4.3?

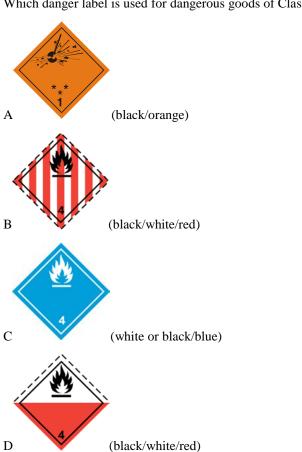

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-06	5.2.2.2.2	D

What does the danger label below mean?



(black/red/yellow)

- A Explosive
- B Flammable (flammable solids)
- C Liable to spontaneous combustion
- D Organic peroxide

120 06.0-07 1.1.3.6.1 A

A vessel is transporting packages of UN No. 1428 SODIUM, Class 4.3, Packing Group I. What is the maximum mass of such packages so that only Section 1.1.3.6.2 of ADN is applicable?

- A 300 kg
- B For this substance, there is no exempted quantity
- C 3,000 kg
- D 30,000 kg

120 06.0-08 1.1.3.6.1, 3.2, Table A

В

A vessel is transporting packages of UN No. 3102 ORGANIC PEROXIDE TYPE B, SOLID, Class 5.2. What is the maximum mass of such packages so that only Section 1.1.3.6.2 of ADN is applicable?

- A 300 kg
- B For this substance, there is no exempted quantity
- C 3,000 kg
- D For Class 5.2, there is no quantity limitation

Number	Source		Correct answer
120 06.0-09	1.1.3.	6.1	A
	Packi	isel is transporting packages of corrosive substances of Class 8, ing Group III. What is the maximum mass of such packages so that Section 1.1.3.6.2 of ADN is applicable?	
	A	3,000 kg	
	В	300 kg	
	C	30,000 kg	
	D	For Class 8, there is no exempted quantity	
120 06.0-10	8.3.1		D
	tonne you ta	dition to 1,000 tonnes of steel coils, a vessel's cargo contains 30 s of UN No. 1830 SULPHURIC ACID in packages (Class 8). May ake on board persons who are not members of the crew, do not ally live on board or are not on board for official reasons?	
	A	In this case, yes, since no approval certificate is needed to transport sulphuric acid anyway, the acid being neither flammable nor explosive	
	В	Yes, but only with the vessel owner's agreement	
	C	Yes, subject to special authorization by the competent authority	
	D	Transport of such persons is prohibited	
120 06.0-11	7.1.5.	4.3	С
	kept f	isel has three blue cones. What is the minimum distance that must be from urban zones and tank storage sites when berthed outside the ing areas specifically designated by the competent authority?	
	A	50 m	
	В	100 m	
	C	500 m	
	D	1,000 m	

Number	Source	e	Correct answer
120 06.0-12	7.1.4	.3.1	A
	May IBCs	goods of Classes 6.1 and 8 be stowed together in the same hold in §?	
	A	Yes, provided they are separated by a minimum horizontal distance of 3 m and are not stowed one on top of the other	
	В	Yes, they may be stowed together without any conditions	
	С	No, goods of these two classes must be separated by a watertight cargo bulkhead	
	D	No, goods of Class 6.1 must never be stowed in the same hold together with goods of other classes	
120 06.0-13	7.1.4	.3.4	A
	-	goods of Class 1 of different compatibility groups be stowed ther in the same hold?	
	A	Yes, as long as this is in accordance with the table in 7.1.4.3.4	
	В	No	
	С	There is no prohibition on mixed loading, but the stacking requirements must be respected	
	D	Only with the agreement of an expert on explosives	
120 06.0-14	7.1.4	.3.3	D
	mark	ssel is transporting in wooden boxes goods of Class 1 for which ting with three blue cones or three blue lights is prescribed in Table A 2.1. May goods of Class 6.2 be stowed together in the same hold?	
	A	No, goods of these two classes may not be transported on the same vessel	
	В	Yes, as long as the compatibility groups permit it	
	C	No, only with the agreement of an expert	
	D	Yes, but only if they are separated by a distance of not less than 12 m	

Number	Source	Correct answer
120 06.0-15	7.1.4.3.2	С
	May packages containing UN No. 1614 HYDROGEN CYANIDE, STABILIZED, and packages containing UN No. 2309 OCTADIENE be stowed together in the same hold?	
	A No, goods of these two classes may not be transported on the same vessel	
	B Yes, as long as the minimum horizontal distance of 3 m is respected	
	C No, irrespective of the quantity, dangerous goods for which marking with two blue cones or two blue lights is prescribed in column (12) of Table A of 3.2.1 must not be stowed in the same hold as flammable goods for which marking with one blue cone or one blue light is prescribed in column (12) of Table A of 3.2.1	
	D Yes, there is absolutely no prohibition on mixed loading of these two goods	
120 06.0-16	7.1.4.3, 7.1.4.4, 7.1.4.5	С
	Provisions on the prohibition on mixed loading apply to the carriage of dangerous goods in packages. Where in ADN can these provisions be found?	
	A In Section 3.2.1, Table A	
	B In Section 3.2.1, Table C	
	C In Subsections 7.1.4.3 to 7.1.4.5	
	D In Subsections 1.1.3.1 to 1.1.3.6	
120 06.0-17	7.1.4.3	D
	May packages containing different dangerous goods be loaded side by side?	
	A Yes, but the danger labels must be visible	
	B In principle, no	
	C Yes, only the prohibition on stacking packages applies	
	D Yes, but only if the prohibition on mixed loading is respected	


Number	Source	?	Correct answer
120 06.0-18	7.1.4.	.1.1	В
		gle hull vessel with an approval certificate has to take on board the wing substances and articles of Class 1 in accordance with ADN:	
	•	 20 tonnes of UN No. 0340 NITROCELLULOSE (Classification Code 1.1D) 	
	•	• 5 tonnes of UN No. 0131 LIGHTERS, FUSE (Classification Code 1.4S)	
	•	• 10 tonnes of UN No. 0238 ROCKETS, LINE-THROWING (Classification Code 1.2G)	
		his cargo be transported while respecting the quantity limitations ribed?	
	A	Yes, in accordance with the table of quantity limitations for Class 1, the maximum quantity permitted has not been exceeded	
	В	No, one of the three cargoes exceeds the maximum net mass	
	C	Yes, if the nitrocellulose is loaded in the hold at the front extremity and the fuse lighters are loaded in the hold at the rear extremity	
	D	Yes, there are no quantity limitations for these substances	
120 06.0-19	7.1.5.	.2	A
	Table blue l	issel is loaded with explosive substances and articles for which 3.2, e A, column (12), prescribes marking with three blue cones or three lights. What distance is such a vessel required to keep from other els when under way, if possible?	
	A	50 m	
	В	100 m	
	C	10 m	
	D	20 m	

Number	Source	Correct answer
120 06.0-20	1.1.3.6.1, 3.2.1, Table A	A
	A dry cargo vessel has to take on board 25 tonnes of UN No. 1223 KEROSENE in packages (steel drums). Is the vessel required to be marked with one blue cone or one blue light because of this cargo of dangerous goods?	
	A No, for KEROSENE no marking is prescribed	
	B No, since the gross mass of the cargo does not exceed 25 tonne	es
	C Yes, all vessels transporting goods of Class 3 are required to b marked with one blue cone or one blue light	e
	D Yes, since the gross mass of 3,000 kg has been exceeded	
120 06.0-21	1.1.3.6.1, 3.2.1, Table A	A
	A dry cargo vessel has to take on board 30 tonnes of UN No. 1263 PAINT or PAINT RELATED MATERIAL, Packing Group I, in pack (steel drums). Is the vessel required to be marked with one blue cone one blue light because of this cargo of dangerous goods?	-
	A Yes, since the gross mass of this cargo exceeds 300 kg	
	B Yes, all vessels transporting goods of Class 3 are required to b marked with one blue cone or one blue light	e
	C No, no particular marking is required on account of this additional cargo	onal
	D No, marking with one blue cone or one blue light is only requi for tank vessels	red
120 06.0-22	3.2.1, Table A, 7.1.4.1.1	D
	A single-hull dry cargo vessel that has a certificate of approval is transporting only UN No. 3101 ORGANIC PEROXIDE TYPE B, LIQUID, in packages. What is the maximum quantity permitted?	
	A 300,000 kg	
	B 100,000 kg	
	C 50,000 kg	
	D 15,000 kg	

Examination objective 6: Loading, unloading and transport

Number	Source	
120 06.0-23	Basic general knowledge	A
	What is the main purpose of marking	packages with danger labels?
	A The symbols enable the hazard to be recognized	s presented by the dangerous goods
	B The consignee needs to know v	which package is intended for him
	C The master needs to know to lo only on the deck	ad all packages with danger labels
	D Packages are marked with dang facilitate customs clearance of	
120 06.0-24	5.2.2.2.2	В

Which of these danger labels means that a package poses a corrosive hazard?



Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-25	5.2.2.2.2	A
	Which of these danger labels means that a package poses a toxic hazard?	







120 06.0-26 5.2.2.2.2, 5.3 C

In ADN, where are the danger label models prescribed by the international regulations found?

- A In Section 1.2.1
- B In Section 3.2.2, Table B
- C In Chapters 5.2 and 5.3
- D In Subsection 7.1.5.0.2

Number	Source	e	Correct answer
120 06.0-27	5.2.2	2, 3.2.1, Table A	A
	What does it mean when two different labels are affixed to the same package?		
	A	The package poses several hazards	
	В	The package may only be transported within port areas and not on the open river	
	C	Mixed loading with other dangerous goods is always prohibited	
	D	The police must be informed that dangerous goods are being transported	
120 06.0-28	Basic	c general knowledge	A
		ain goods of Class 3 present another hazard in addition to a fire rd. In the case of packages, how can attention be drawn to this other rd?	
	A	By marking the packages with additional danger labels	
	В	By including a statement in the transport document	
	C	By adding the UN number of the dangerous goods above the danger label in print at least 3 cm high	
	D	By highlighting (underlining in red) the additional hazard in the instructions in writing	
120 06.0-29	7.1.4	.4.2	В
		er which conditions may goods of Classes 6.1 and 8 stowed in rate containers with complete metal walls be loaded in the same?	
	A	In no circumstances may they be loaded in the same hold	
	В	Always, without any conditions	
	C	Goods of different classes must be separated by a horizontal distance of at least 3 m	
	D	They may be loaded in the same hold, but not stacked	

Number	Source	
120 06.0-30	7.1.4.3.3, 7.1.4.14.2, 7.1.4.14.3	С
	UN No. 1716 ACETYL BROMIDE in packages is loaded. Which of the following statements is false?	
	A Packages containing ACETYL BROMIDE must be separated by not less than 1 m from the accommodation, the engine rooms, the wheelhouse and any sources of heat	
	B The packages must be separated by a distance of not less than 12 m from other dangerous goods for which marking with three blue cones or three blue lights is prescribed	
	C Packages containing ACETYL BROMIDE must be separated from packages not containing dangerous goods	
	D The packages must be protected against the effects of weather	
120 06.0-31	1.1.3.6.1, 3.2.1, Table A	С
	A vessel is transporting UN No. 1428 SODIUM in packages. What quantity may be transported in packages on a vessel before ADN is applicable?	
	A 50 kg	
	B For Class 4.3, there is no exempted quantity	
	C 300 kg	
	D 5,000 kg	
120 06.0-32	7.1.4.1.1	В
	A single type of dangerous goods, of Class 2, with danger label No. 2.3, has to be transported in bulk. What is the maximum gross mass permitted if the vessel is not a double-hull vessel within the meaning of ADN?	
	A 50,000 kg	
	B 120,000 kg	
	C 300,000 kg	
	D Unlimited	

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-33	5.2.2.2.2	В



(red, white, black)

What does the danger label reproduced here mean?

- A The dangerous goods which carry this label are flammable (liquid substances)
- B The dangerous goods which carry this label are flammable (solid substances)
- C The dangerous goods which carry this label emit flammable gases in contact with water
- D The dangerous goods which carry this label are explosive

120 06.0-34 5.2.2.2.2 A



(green, black)

What does the danger label reproduced here mean?

- A The dangerous goods which carry this label are a non-flammable, non-toxic gas
- B The dangerous goods which carry this label are an organic peroxide
- C The dangerous goods which carry this label are a corrosive substance
- D The dangerous goods which carry this label are a toxic substance

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-35	5.2.2.2.2	В



(black, white)

What does the danger label reproduced here mean?

- A The dangerous goods which carry this label are a non-flammable gas
- B The dangerous goods which carry this label are a corrosive substance
- C The dangerous goods which carry this label are an organic peroxide
- D The dangerous goods which carry this label are a toxic substance

120 06.0-36 5.2.2.2.2 B



(white, black)


What does the danger label reproduced here mean?

- A The dangerous goods which carry this label emit flammable gases in contact with water
- B The dangerous goods which carry this label are an infectious substance
- C The dangerous goods which carry this label are a toxic substance
- D The dangerous goods which carry this label must not be loaded together with other substances in the same vessel

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-37	5.2.2.2.2	D


Which danger label indicates that a package contains substances liable to

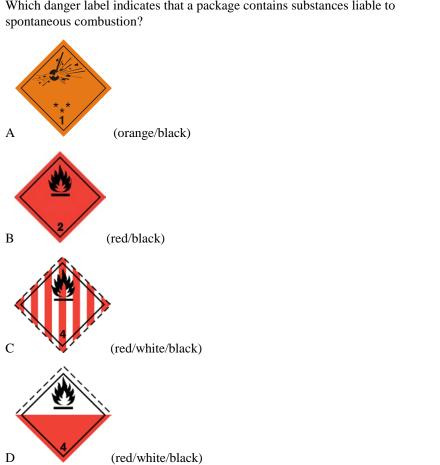

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-38	5.2.2.2.2	D


Which danger label should a package containing corrosive substances bear?



Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-39	5.2.2.2.2	В


Which danger label should packages containing oxidizing substances bear?



Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-40	5.2.2.2.2	С


Which danger label should packages containing flammable solids bear?



Examination objective 6: Loading, unloading and transport

Number	Source	Correct	t answer
120 06.0-41	5.2.2.2.2	I	В


Which danger label should packages containing flammable gases bear?

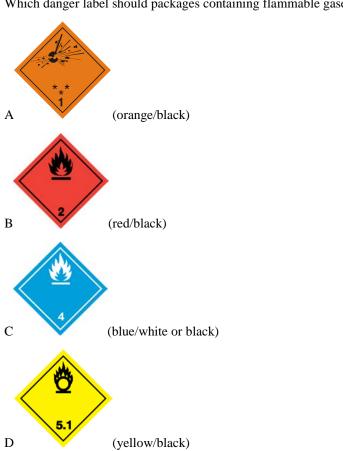

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-42	5.2.2.2.2	A

Which danger label should packages containing explosive substances bear?



Number	Source		Correct answer
120 06.0-43	7.1.4.3	3.3	A
	contai three l	sel is carrying packages containing goods of Class 6.1 and packages ning goods of Class 5.2 for which marking with three blue cones or blue lights is prescribed in Table A of Section 3.2.1. Can these ges be stocked in the same hold?	
	A	Yes, but the packages must be separated by a distance of not less than $12\ \mathrm{m}$	
	В	No, this is prohibited, since for packages containing goods of Class 6.1, marking with at least two blue cones or two blue lights is prescribed	
	C	Yes, but the packages must be placed in metal containers with complete walls	
	D	No, goods of Classes 6.1 and 5.2 are not permitted on board the same vessel	
120 06.0-44	7.1.4.	3.1	A
	_	ackages of goods of Classes 6.1 and 6.2 be loaded together in the n IBCs?	
	A	Yes, but they must be separated by a minimum horizontal distance of 3 m	
	В	Yes, but they must be stacked	
	C	No, this is not permitted	
	D	Yes, but not in the same hold	
120 06.0-45	7.1.4.3	3.1	D
	_	ackages of goods of Classes 3 and 6.1 be loaded together in the hold Cs if no marking with cones is prescribed in Section 3.2.1, Table A her?	
	A	Yes, but they must be stacked	
	В	Yes, but not in the same hold	
	C	No, this is not permitted	
	D	Yes, but they must be separated by a minimum horizontal distance of 3 $\ensuremath{\mathrm{m}}$	

Number	Source	2	Correct answer
120 06.0-46	5.2.2	.1.1	A
		t does it mean when two different danger labels are affixed to the package?	
	A	The package poses several hazards	
	В	The package may only be transported within port areas and not on the open river	
	C	Mixed loading with other dangerous goods is always prohibited	
	D	The police must be informed that dangerous goods are being transported	
120 06.0-47	7.1.4	.1	С
	certai	mum permissible gross masses are applicable to the transport of in dangerous goods (limitation of quantities carried). Where in ADN ne relevant provisions found?	
	A	Paragraph 1.2.2.2.2	
	В	Chapter 3.2	
	C	Subsection 7.1.4.1	
	D	Subsection 9.3.2.23	
120 06.0-48	7.1		В
	and h	ch Chapter of ADN contains requirements for the loading, unloading andling of cargo applicable to dangerous goods of any class in dry o vessels?	
	A	Chapter 1.1	
	В	Chapter 7.1	
	C	Chapter 7.2	
	D	Chapter 8.2	
120 06.0-49	7.1.3	.42	В
	What	t does ADN prescribe in respect of heating of holds?	
	A	The heating of holds is always permitted	
	В	The heating of holds is prohibited	
	C	The heating of holds is prescribed in certain cases	
	D	The heating of holds is only permitted with the agreement of the loader	

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-50	5.2.2.2.2	D



(orange/black)

What does the danger label reproduced here mean?

- A The substance in question is flammable (liquid substance)
- B The substance in question is flammable (solid substance)
- C The substance in question emits flammable gases in contact with water
- D The substance in question is explosive

120 06.0-51 7.1.4.7.1 A

Where may dangerous goods in packages for which marking with one blue cone or one blue light is prescribed to be loaded or unloaded?

- A At the places designated or approved for this purpose by the competent authority
- B At any place situated away from inhabited areas
- C At oil terminals
- D At any place the master considers appropriate

120 06.0-52 7.1.4.3.4

In which class must the compatibility group be taken into account in order to respect the prohibitions on mixed loading of cargoes in packages?

- A Class 1
- B Class 2
- C Class 3
- D Class 6.1

A

Number	Source	
120 06.0-53	7.1.4.3.2	D
	May packages containing goods of Class 6.1 for which marking with two blue cones or two blue lights is prescribed in Table A of Section 3.2.1 be loaded in the same hold together with other goods?	
	A No, they may only be loaded in the same hold with goods of Class 6.1	
	B Yes, they may be loaded in the same hold together with all other goods except for foodstuffs, other articles of consumption and animal feeds	
	C No, they may not be loaded in the same hold together with any other dangerous goods	
	D Yes, they may be loaded in the same hold together with all other goods apart from flammable goods for which marking with one blue cone or one blue light is prescribed in Table A of Section 3.2.1	
120 06.0-54	7.1.4.4.2	A
	Metal containers with complete walls containing goods of Classes 6.1 and 8 have to be loaded. What minimum horizontal separation distance must be respected according to ADN?	
	A Minimum separation distances are not prescribed	
	B 3 m	
	C 2 m	
	D 2.5 m	
120 06.0-55	7.1.4.3.1	D
	Goods of Classes 6.1 and 6.2 on pallets have to be transported. By what horizontal distance must they be separated?	
	A 2.4 m	
	B 2.6 m	
	C 2.8 m	
	D 3 m	

Number	Source		Correct answer
120 06.0-56	7.1.4	.3.3	В
	blue l	goods of Class 1 for which marking with three blue cones or three lights is prescribed be loaded together with packages containing s of Class 6?	
	A	Yes, if they are separated by a horizontal distance of at least 3 m	
	В	Yes, if they are separated by a horizontal distance of at least 12 m	
	C	No	
	D	Yes, if they are stacked	
120 06.0-57	7.1.4	.3	A
	Table	tances of Classes 6.1 and 8 for which no marking is prescribed in e A of Section 3.2.1 have to be transported. Can these substances be ed in the same hold?	
	A	Yes	
	В	No, they must be loaded on deck	
	C	No, they may not be transported together on the same vessel	
	D	No, they must be placed in separate holds	
120 06.0-58	7.1.4	.9	В
		n is cargo trans-shipment to another vessel permitted outside the as approved for this purpose?	
	A	There are no specific requirements	
	В	When authorized by the competent authority	
	C	During trans-shipment while at anchor	
	D kilom	When the nearest approved handling facility is more than 2 netres away	
120 06.0-59	7.1.4	.4.2	A
	toxic	metal containers with complete walls are stacked. One is loaded with substances of Class 6.1, the other with corrosive substances of Class this permitted?	
	A	Yes	
	В	No	
	C	Yes, but only if they are stowed above deck	
	D	Yes, but only if they are stowed below deck	

Number	Source	Correct answer
120 06.0-60	7.1.4.4.3	В
	The following containers have to be transported:	
	 A container covered with tarpaulins (no closed metal roof) loaded with substances of Class 3 	
	 A container covered with tarpaulins (no closed metal roof) loaded with substances of Class 5.1 	
	What is the minimum separation distance required between the two containers?	
	A 5 m	
	B 2.4 m	
	C 4.8 m	
	D 10 m	
120 06.0-61	3.2.1, Table A, 7.1.5.0.2	С
	In addition to goods for which no blue cone marking is prescribed, two containers of UN No. 1397 ALUMINIUM PHOSPHIDE with a total mass of 50,000 kg have to be transported. Which marking is the vessel required to display?	
	A No marking	
	B One blue cone/one blue light	
	C Two blue cones/two blue lights	
	D Three blue cones/three blue lights	
120 06.0-62	3.2.1, Table A, 7.1.5.0.2	A
	A container with 5,200 kg of UN No. 1950 AEROSOLS, flammable, Class 2, Classification Code 5F is being transported on board a vessel. Which marking is the vessel required to display?	
	A No marking	
	B One blue cone/one blue light	
	C Two blue cones/two blue lights	
	D Three blue cones/three blue lights	

Number	Source		Correct answer	
120 06.0-63	7.1.4	.1.1	C	
		re in ADN are the permissible gross masses (limitation of quantities ed) for the transport of certain dangerous goods to be found?		
	A	Paragraph 1.1.3.6.1		
	В	Section 3.2.1		
	C	Paragraph 7.1.4.1.1		
	D	Paragraph 7.1.5.0.2		
120 06.0-64	3.2.1	, Table A, 1.1.3.6.1	В	
	UN N	gerous goods comprising 2,500 kg of No. 1159 DIISOPROPYL ETHER have to be transported alone in oved packaging on a dry cargo vessel. What marking is the vessel ired to display?		
	A	One blue cone/one blue light		
	В	For the transport of these dangerous goods, the vessel is not required to display any marking		
	C	Two blue cones/two blue lights		
	D	An orange-coloured plate in accordance with RID/ADR		
120 06.0-65	3.2.1	, Table A, 7.1.5.0.2	D	
		following dangerous goods in closed containers have to be ported on board a vessel:		
		• 50 steel drums, each containing 200 litres of UN No. 1100 ALLYL CHLORIDE, Class 3 (6.1), Packing Group I, total mass 11,000 kg; and		
		 100 plastic jerrycans each containing 20 litres of UN No. 2256 CYCLOHEXENE, Class 3, Packing Group II, total mass 1,850 kg 		
	Whic	ch marking is the vessel required to display?		
	A	Two blue cones/two blue lights		
	В	One blue cone/one blue light		
	C	This is decided by the principal		
	D	No marking		

Number	Source	?	Correct answer
120 06.0-66	3.2.1,	, Table A, 7.1.5.0.2	A
		following dangerous goods have to be transported in closed iners on board a vessel:	
	•	 500 steel drums, each containing 200 litres of UN No. 1100 ALLYL CHLORIDE, Class 3 (6.1), Packing Group I, with a total mass of 110,000 kg 	
	Whic	h marking is the vessel required to display?	
	A	Two blue cones/two blue lights	
	В	One blue cone/one blue light	
	C	This is decided by the principal	
	D	No marking	
120 06.0-67	3.2.1,	, Table A, 7.1.5.0.1	В
	SPIR	nk-containers, each containing 24 tonnes of UN No. 1203 MOTOR IT or GASOLINE or PETROL, Class 3, Packing Group II, have to ansported on board a vessel.	
	Whic	h marking is the vessel required to display?	
	A	Two blue cones/two blue lights	
	В	One blue cone/one blue light	
	C	This is decided by the principal	
	D	No marking	
120 06.0-68	3.2.1,	, Table A, 7.1.5.0.2	D
	The f	following have to be transported in closed containers on board a sil:	
	•	 500 steel drums, each containing 200 litres of UN No. 1230 METHANOL, Class 3 (6.1), Packing Group II, total mass 85,000 kg 	g
	Whic	h marking is the vessel required to display?	
	A	Two blue cones/two blue lights	
	В	One blue cone/one blue light	
	C	This is decided by the principal	
	D	No marking	

Examination objective 6: Loading, unloading and transport


Number	Source		Correct answer
120 06.0-69	7.1.4.4	4	В
		and navigation vessel has to transport, in addition to packages, a ner with complete metal walls containing:	
	•	10 drums, each holding 200 litres of UN No. 1100 ALLYL CHLORIDE, Class 3 (6.1), Packing Group I;	
	and an	other container with complete metal walls containing:	
	 100 plastic jerrycans, each holding 20 litres of UN No. 2256 CYCLOHEXENE, Class 3, Packing Group II 		
	Under hold?	Under ADN, may these two containers be placed side-by-side in the same hold?	
	A No, since substances for which marking with one blue cone is prescribed may not be loaded in the same hold together with substances for which marking with two blue cones is prescribed		
	В	Yes, since the two substances are in containers with complete metal walls	
	C	No, since dangerous substances of different classes should never be loaded together in the same hold	
	D	Yes, the containers may be loaded in the same hold, but only if a	

separation distance of 3 m is maintained

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
120 06.0-70	5.2.1.8.3	D

How are environmentally hazardous substances marked?



Number	Source	Correct answer	
120 07.0-01	1.1.3.	6.1, 8.1.8.1	В
	A ves		
	30 to	nnes of UN No. 2448 SULPHUR, MOLTEN; nnes of UN No. 1498 SODIUM NITRATE; and nnes of UN No. 2031 NITRIC ACID	
		his cargo, does the vessel have to have a certificate of approval ding to sub-Section 8.1.8.1 of ADN?	
	A	No	
	В	Yes, in all cases	
	C	Yes, if this is prescribed in one of the three transport documents	
	D	Yes, if this is prescribed in the instructions in writing	
120 07.0-02	7.1.4.	11.1	D
	of a d	n dangerous goods are being transported, prior to departure, the master lry cargo vessel is required to draw up several documents. Which of the wing is included in these documents, among others?	
	A	Instructions in writing for each dangerous goods	
	В	A certificate with which the master attests that the dangerous goods have been loaded and stowed in accordance with the requirements of ADN	
	C	A list indicating the place of loading, the name of the loading installation and the date and time of loading, in respect of each dangerous goods	
	D	A stowage plan indicating which dangerous goods (description as in the transport document) are stowed in the various holds or on deck	
20 07.0-03	7.1.4.	11.1	A
		cargo vessel has dangerous goods of different classes on board. Who d draw up the stowage plan?	
	A	The master	
	В	The loader	
	C	The expert	
	D	The shipping company's distributor	

Number	Source		Correct answer
120 07.0-04	1.1.3.	6.1, 3.2.1, Table A, 8.1.8.1	A
	gas or	cargo vessel is transporting 10 cylinders of UN No. 1978 PROPANE a board. The gross mass of each cylinder is 35 kg. Does the vessel to have a certificate of approval for the carriage of liquefied gas?	
	A	Yes, in this case the vessel should have a certificate of approval, since the total gross mass of the cargo is greater than 300 kg	
	В	Yes, goods of Class 2 may only be transported on vessels possessing a certificate of approval	
	C	Yes, a certificate of approval is always required for the transport of dangerous goods	
	D	No, since the exempted gross mass per class is 3,000 kg in this case	
120 07.0-05	7.1.2.	19.1, 8.1.8.1	С
	wheat barge	cargo vessel in possession of a certificate of approval has a cargo of on board. The master receives the order to take an empty pushed lacking a certificate of approval in side-by-side formation. Is he tted to do this?	
	A	Yes, since certificates of approval are only prescribed if one of the vessels is required to display a blue cone	
	В	No, loaded dry cargo vessels are not permitted to take empty barges in side-by-side formation	
	C	Yes, provided that, consistent with their inspection certificate or Community certificate, the two vessels are permitted to navigate side by side	
	D	No, if a vessel navigating in convoy is in possession of a certificate of approval, all vessels of the convoy must possess such a certificate	
120 07.0-06	7.1.2.	19.1, 8.1.8.1	В
	forma	cargo vessel is transporting wheat. May you take in side-by-side tion an empty tank barge not degassed that has previously been porting dangerous goods?	
	A	Yes, but only if the two vessels display the correct cone marking	
	В	Yes, but only if the dry cargo vessel is also in possession of a certificate of approval	
	C	Yes, since the dry cargo vessel does not require a certificate of approval in this case	
	D	No, this is prohibited	

Number	Source		Correct answer
120 07.0-07	7.1.2.	19.1	В
	A dry cargo vessel in side-by-side formation with a pushed barge is transporting dangerous goods in convoy. The barge is transporting gravel. Which vessel(s) require(s) a certificate of approval?		
	A	Only the dry cargo vessel	
	В	Both vessels	
	C	Only the pushed barge	
	D	Neither vessel	
120 07.0-08	5.4.3.	2	A
	goods	ntainer ship with a crew speaking Dutch is transporting dangerous is from the Netherlands to Bulgaria. In which language(s) should the actions in writing to be provided by the carrier be drafted?	
	A	In Dutch	
	В	In English, German and French	
	C	In Dutch and German	
	D	In Dutch or German	
120 07.0-09	7.1.4.8.1		В
	which	ission in writing is required in order to load explosive substances for a marking with three blue cones or three blue lights is prescribed in on 3.2.1, Table A. Who issues the authorization?	
	A	The local fire brigade	
	В	The competent authority	
	C	The shipping police	
	D	The classification society	
120 07.0-10	7.1.4.	8.1	A
	blue o	are transporting explosive substances for which marking with three cones or three blue lights is prescribed in Section 3.2.1, Table A. ission in writing is required for unloading. Who issues the rization?	
	A	The competent authority	
	В	The handling facility	
	C	The classification society	
	D	The local fire brigade	

Number	Source	,	Correct answer
120 07.0-11	7.1.4.	8.1	D
	Permi substa prescr		
	A	The shipping police	
	В	The handling facility	
	C	The local fire brigade	
	D	The competent authority	
120 07.0-12	7.1.4.	.11.1	A
		nformity with ADN, a stowage plan has to be drawn up for dry cargo ls. How should dangerous goods be described in this stowage plan?	
	A	As in the transport document	
	В	Outlined in red	
	C	By their commercial name	
	D	With an indication of the relevant class	
120 07.0-13	8.1.2.1, 8.1.2.2		
		v cargo vessel is loaded with dangerous goods in a quantity greater than exempted quantity. Which of the following documents is required to be pard?	
	A	The certificate of approval and the instructions in writing	
	В	The certificate of approval and the checklist	
	C	The instructions in writing and the checklist	
	D	The certificate of approval and the certificate attesting gas-free condition	
120 07.0-14	5.4.3		A
	Durin Wher		
	A	In the instructions in writing	
	В	In the stowage plan	
	C	In the security plan	
	D	In the transport document	

Number	Source		Correct answer
120 07.0-15	7.1.4.	11.2	A
	What	must the master of a container ship enter on the stowage plan?	
	A	The number of the container	
	В	The proper name of the substance and the official number of the vessel	
	C	The number of the container and, if known, the number of the substance and the length and width of the container	
	D	The proper name of the substance, its quantity and class	
120 07.0-16	2.2.1.	1.5, 2.2.1.1.6, 7.1.4.3.4	В
		sel is transporting a substance of Class 1 described in the transport nent as follows:	
	UN N	o. 0392 HEXANITROSTILBENE 1.1 D	
	What	does the letter D signify in this context?	
	A	It indicates the maximum quantity of this explosive substance that may be transported by vessel	
	В	On the basis of this letter, it can be ascertained whether carriage in the same hold together with certain other explosive substances is permitted or prohibited	
	C	On the basis of this letter, it can be ascertained whether the explosive substance is insensitive	
	D	On the basis of this letter, it can be ascertained whether carriage in the same hold together with substances of Class 3 is permitted or prohibited	
120 07.0-17	1.1.3.	6.2	С
	transp	h documents should always be on board, even if the vessel is porting dangerous goods in quantities below the exempted quantities ated in Paragraph 1.1.3.6.1?	
	A	The certificate of approval and the instructions in writing	
	В	The transport document and the instructions in writing	
	C	The transport document and the stowage plan	
	D	The stowage plan and the certificate of approval	

Number	Source		Correct answer
120 07.0-18	5.4.3.	2	C
	A ves Rotte langu		
	A	Only in Dutch	
	В	At least in Dutch	
	C	In French	
	D	In Dutch, German, English and French	
120 07.0-19	1.1.3.	6.1, 1.1.3.6.2, 5.4.3.2	D
		cargo vessel is loaded with 1,500 kg of dangerous goods of Class 3, ng Group III.	
	Must	the carrier provide instructions in writing?	
	A	Yes, they must be provided prior to loading	
	В	Yes, they may be provided after loading but before departure from the loading installation	
	C	This is not necessary, since a dry cargo vessel is not permitted to transport a flammable liquid as described here	
	D	No, for this quantity, instructions in writing do not need to be provided	
120 07.0-20	7.1.3.	1.3, 7.1.6.12, 7.1.6.16, 8.1.2.1	A
	What	is the purpose of the record book on board a dry cargo vessel?	
	A	All results of measurements of toxicity and of the concentrations of flammable gases and oxygen are recorded in the book	
	В	All results of measurements of the concentrations of flammable gases and oxygen, but not of measurements of toxicity, are recorded in the book	
	C	The goods which the dry cargo vessel is permitted to transport are listed in the book	
	D	The book contains the results of the stability test for double-hull vessels	

Number	Source		Correct answer
120 07.0-21	8.1.2.	4	В
		h documents should be handed to the master before loading a dry vessel transporting dangerous goods?	
	A	The transport documents	
	В	The transport documents and the instructions in writing	
	C	None, since in the case of dry cargo vessels, the documents may also be handed to the master after loading but prior to departure	
	D	The instructions in writing	
120 07.0-22	8.1.8.	2, 1.16	С
	What does a dry cargo vessel's certificate of approval confirm?		
	A	That the vessel complies with the applicable requirements of ADN and that dangerous goods may thus be transported in the cargo tanks	
	В	That the vessel complies with the general technical requirements	
	C	That the vessel complies with the applicable requirements of ADN	
	D	That the vessel is equipped in accordance with the requirements of ADN	

Number	Source	Source Co		
120 08.0-01	Basic	general knowledge	В	
		of Class 2 escapes from a container. Which of the following should formed <u>first</u> ?		
	A	The customs authority		
	В	The competent services (for example, regional centre)		
	C	The classification society		
	D	The media		
120 08.0-02	8.3.5		A	
		cargo vessel is loaded with dangerous goods. The paint on the ing requires scraping. Is this permitted?		
	A	No, since sparks could be caused during work on the coaming		
	В	Yes, work may be carried out on the gangboard on the outside of the hold even if it is liable to cause sparks		
	C	No, work liable to cause sparks is prohibited everywhere on board a dry cargo vessel loaded with dangerous goods		
	D	Yes, scraping of paint cannot cause sparks		
120 08.0-03	5.4.3		В	
	a disa	ng the transport of packages all originating from the same consignor, agreeable odour is detected. The source is not known. Do measures to be taken, and if so, which ones?		
	A	No particular measures need to be taken. It is possible to continue under way while monitoring the situation		
	В	The actions indicated in the instructions in writing should be taken		
	C	The fire brigade should be alerted as a safety precaution		
	D	The "Do not approach" signal should be activated and the situation should continue to be monitored		
120 08.0-04	7.1.4.	8.2	С	
		ssel is being loaded with explosive substances. A storm is brewing. should be done?		
	A	Continue to load if the shore facility is equipped with a lightning conductor		
	В	Immediately distance the vessel from the trans-shipment facility		
	C	Suspend the work of loading during the storm		
	D	Continue to load until the competent port authority for the trans- shipment facility prohibits continuation of loading		

Number	Source		Correct answer
120 08.0-05	1.1.3.	6.1, 8.3.4	С
		onnes of tree trunks and 10 tonnes of UN No. 1812 POTASSIUM ORIDE, SOLID, are being transported.	
	Is sm	oking allowed on the deck of the vessel?	
	A	Yes, provided the cargo is secured in the vessel and the hatchways are closed	
	В	Yes, but only with the master's consent	
	C	No	
	D	Yes, the substance belongs to Class 8 and this class is not subject to the requirements of ADN in respect of the prohibition on smoking	
120 08.0-06	1.1.3.	6.1, 8.3.4	D
	of 9,0	ages of substances of Class 3, Packing Group III, with a gross mass 3000 kg are being transported. Is smoking prohibited on deck and, if which section of the ADN is this stated?	
	A	No, since this cargo is not subject to the requirements of ADN	
	В	Yes, as stated in Subsection 7.1.3.74	
	C	No, during the transport of substances of Packing Group III, smoking is not prohibited	
	D	Yes, as stated in Section 8.3.4	
120 08.0-07	8.3.5		A
		cargo vessel is transporting dangerous goods. Is soldering work itted on deck outside the protected area?	
	A	Yes, but only if, for the duration of the work, a distance of 3 metres from the protected area is maintained	
	В	No, the permission of the competent authority or a certificate attesting gas-free condition is required in all cases	
	C	Yes, but only if two additional extinguishers are provided	
	D	No, the work must be carried out by duly authorized experts	
120 08.0-08	7.1.3.	44	С
	clean	oard a dry cargo vessel with a cargo of dangerous goods, may ing operations with liquids having a flashpoint below 55 °C be ed out?	
	A	Yes, but only outside the protected area	
	В	Yes, but only in the engine room	
	C	No	
	D	Yes, but only if there is an extinguisher nearby	

Number	Source		Correct answe
120 08.0-09	1.1.3.6.1, 3.2.1, Table A, 8.1.5.1		D
	ALC	cargo vessel is transporting 2,000 kg of UN No. 1986 OHOLS, FLAMMABLE, TOXIC, N.O.S., Packing Group III. Must be a toximeter with the instructions for its use on board?	
	A	Yes, during the transport of toxic substances, there should always be a toximeter on board	
	В	No, since marking with blue cones or blue lights is also not prescribed	
	C	Yes, since this is prescribed in Section 3.2.1, Table A, column (9)	
	D	No, since the gross mass is less than 3,000 kg	
120 08.0-10	3.2.1,	Table A, 8.1.5.1	A
		Io. 2067 AMMONIUM NITRATE FERTILIZERS has to be ported. Is an escape device required on board?	
	A	No	
	В	No, provided that the cargo has a dustproof cover	
	C	Yes, for the entire crew	
	D	Yes, for each person on board	
120 08.0-11	3.2.1,	Table A, 8.1.5.1	С
	BENZ accor	cargo vessel is transporting 60 tonnes of UN No. 2224 ZONITRILE and is displaying two blue cones or two blue lights in dance with Section 3.2.1, Table A. Should there be a toximeter on with the instructions for its use?	
	A	No	
	В	Yes, but only if required by the loader	
	C	Yes	
	D	ADN does not specify	
120 08.0-12	3.2.1,	Table A, 8.1.5.1	A
	Class	cargo vessel is transporting 10 tonnes of explosive substances of 1, UN No. 0012. Should there be a flammable gas detector and a meter on board?	
	A	No	
	В	Yes	
	C	Only a flammable gas detector	
	D	Only a toximeter	

Number	Source		Correct answer
120 08.0-13	3.2.1,	, Table A, 8.1.5.1	D
	SME	cargo vessel is transporting UN No. 3170 ALUMINIUM LTING BY-PRODUCTS in bulk. In accordance with ADN, which e following equipment is not prescribed for this cargo?	
	A	Protective shoes and protective gloves	
	В	A suitable self-contained breathing apparatus	
	C	A flammable gas detector with the instructions for its use	
	D	A toximeter with the instructions for its use	
120 08.0-14	3.2.1,	, Table A, 7.1.3.1.3, 7.1.3.1.5, 8.1.5.1	D
	POW	r cargo vessel is transporting UN No. 1398 ALUMINIUM SILICON DER, UNCOATED, in bulk. The gas concentration must be ured. In accordance with ADN, what protective equipment must the on making the measurement wear, as a minimum?	
	A	A full mask with a suitable filter	
	В	Protective gloves and a protective suit	
	C	A protective suit and a breathing apparatus	
	D	An appropriate breathing apparatus	
120 08.0-15	7.1.3.	.1.6	A
	A dry	cargo vessel is transporting dangerous goods of Class 8.	
		all quantity of the substance escapes from the packaging. What urements must be taken, as a minimum, before the hold may be ed?	
	A	It is necessary to measure the concentration of flammable gases and the oxygen content	
	В	Measurements of the concentration of flammable gases and the oxygen content do not need to be made since, for this class, measuring devices are not prescribed	
	C	Only the oxygen content needs to be measured to check that it is sufficient	
	D	Only toxic substances need to be measured	

Number	Source	e	Correct answer
120 08.0-16	CEV	NI, article 8.01, Basic general knowledge	С
	conta	y cargo vessel is transporting some container tanks. One of the ainers containing a substance of Class 3 starts to leak. Which of the wing measures should the master take?	
	A	Activate the "Do not approach" signal and alert the customs authority	
	В	Alert the competent services and wave a red flag	
	С	Alert the competent services and inform the consignor or the consignee	
	D	Activate the "Do not approach" signal and inform the consignee	
120 08.0-17	3.2.1	, Table A, 8.1.5.1	A
		y cargo vessel is transporting 120 tonnes of UN No. 1363 COPRA. his quantity of cargo, should there be escape devices on board?	
	A	No	
	В	Yes, for Class 4.2 it is always necessary to have escape devices on board	
	C	Yes, because there are more than 100 tonnes of cargo on board	
	D	No, the escape devices are only obligatory above 300 tonnes	
120 08.0-18	7.1.3	.1.6	В
	subst	ald breathing apparatus be used if a gas container loaded with a cance of Class 2 is no longer gastight and the hold has to be entered? which one?	
	A	An ambient-air-dependent breathing apparatus, as prescribed in ADN	
	В	A self-contained breathing apparatus (non-ambient-air-dependent)	
	C	A P3 filter mask	
	D	There is absolutely no need to wear a breathing apparatus, since the gases are lighter than air and thus no harmful substance will remain in the hold	

Number	Source	?	Correct answer
120 08.0-19	3.2.1	, Table A, 7.1.3.1.6, 8.1.5.1	С
	A hold contains packages of goods of UN No. 2903 PESTICIDE, LIQUID, TOXIC, FLAMMABLE, N.O.S., Classification Code TF2, Packing Group II, with a total mass of 4,000 kg. The hold must be entered for inspections to be carried out. What equipment (or combination of equipment) is necessary to take the measurements required if damage is suspected?		
	A	A flammable gas detector and an oxygen meter	
	В	A toximeter and an oxygen meter	
	C	A flammable gas detector, a toximeter and an oxygen meter	
	D	A toximeter and a flammable gas detector	
120 08.0-20	3.2.1	, Table A, 7.1.3.1.6, 8.1.5.1	A
		nold, there are packages containing UN No. 1604 YLENDIAMINE, Classification Code CF1, Packing Group II.	
		ckage seems not to be gastight and the hold will have to be entered aspections to be carried out.	
		equipment is needed to take the measurements required so that the may be entered without danger?	
	A	A flammable gas detector and an oxygen meter	
	В	A toximeter, an oxygen meter and a thermometer	
	C	A flammable gas detector, a toximeter and a thermometer	
	D	It is not necessary to make measurements, since ADN does not prescribe measuring devices for this substance	
120 08.0-21	1.1.3	.6	В
		v cargo vessel is transporting 80 kg of goods of Class 4.1, diffication Code FT2, Packing Group II, danger labels 4.1+6.1	
	For to	ransporting this substance, are escape devices required on board?	
	A	Yes, they are always obligatory during the transport of ADN substances	
	В	No	
	C	Yes, unless the consignor issues a dispensation	
	D	Yes, if they are stipulated in the instructions in writing	

Number	Source	Correct answe
120 08.0-22	3.2.1, Table A, 8.1.5.1	C
	A dry cargo vessel is transporting UN No. 2929 TOXIC LIQUID, FLAMMABLE, ORGANIC, N.O.S This being the case, which breathing apparatus is prescribed?	
	A A pressurized air mask	
	B A self-contained breathing apparatus	
	C A breathing apparatus (ambient-air-dependent filter apparatus)	
	D A flexible tube apparatus with a filter	
120 08.0-23	3.2.1, Table A, 8.1.5.1	В
	UN No. 1408 FERROSILICON, a substance of Class 4.3, is being transported. In accordance with ADN, are protective goggles required for the crew on board?	
	A No	
	B Yes	
	C Yes, but only if the substance is packaged	
	D No, they are only required if the substance is transported without packaging or in bulk	
120 08.0-24	3.2.1, Table A, 8.1.5.1	
	In accordance with ADN, for the transport of UN No. 0257 FUZES, DETONATING, is personal protective equipment required on board? If so, which?	
	A Yes, a pair of protective goggles, a pair of protective gloves, a protective suit and a suitable pair of protective shoes	
	B No, for the transport of substances of Class 1 no personal protective equipment is prescribed	
	C Yes, but only a pair of protective goggles and a pair of protective gloves	
	D Yes, but only a breathing apparatus	
120 08.0-25	3.2.1, Table A, 8.1.5.1	В
	In accordance with ADN, are breathing apparatuses required on board during the transport of UN No. 3106 ORGANIC PEROXIDE TYPE D, SOLID, of Class 5.2?	
	A No, this is never necessary for substances of Class 5.2	
	B Yes	
	C No, this is not necessary for solid substances	
	D No, this is only necessary if two blue cones or two blue lights are prescribed for a substance of Class 5.2	

Number	Source	Correct answe
120 08.0-26	1.4.2.2.1, 3.2.1, Table A, 5.4.3, 8.1.5.1	
	In accordance with ADN, what special equipment must be provided on board a dry cargo vessel transporting the substance UN No. 2977 RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, FISSILI of Class 7?	Ξ
	A Only protective clothing against radiation	
	B Individual protective equipment, but no special protective clothing against radiation	
	C Special breathing apparatuses	
	D Special anti-radiation masks	
120 08.0-27	8.1.4	A
	How many extinguishers are required by ADN for a dry cargo vessel transporting dangerous goods in quantities exceeding the exempted quantities?	
	A In addition to the fire-extinguishing appliances prescribed in the general technical requirements, the vessel should be equipped with at least two additional hand fire-extinguishers	1
	B It is sufficient for the vessel to be equipped with the fire-extinguishing appliances prescribed in the general technical requirements	
	C In addition to the fire-extinguishing appliances prescribed in the general technical requirements, the vessel should be provided with at least four additional hand fire-extinguishers	1
	D In addition to the fire-extinguishing appliances prescribed in the general technical requirements, the vessel should be provided with at least three additional hand fire-extinguishers	1

Number	Source		Correct answer
130 02.0-01	9.3.3.	11.3	С
	Must	tank vessels of type N be fitted with cofferdams?	
	A	Yes, but only between the cargo area and the engine room	
	В	Yes, but only between the cargo area and the active bow rudder room	
	C	Yes, cofferdams are required at both ends of the cargo area	
	D	No, cofferdams are not required; they may be fitted on a voluntary basis to act as ballast tanks	
130 02.0-02	9.3.3.	25.1	A
		pumps and accessory loading and unloading piping be located in the area on board tank vessels of type N?	
	A	Yes	
	В	No, this is required only on board tank vessels of type C	
	C	Yes, but only on board vessels with a pump-room below deck	
	D	No, it depends on the navigation area	
130 02.0-03	9.3.3.	25.2 (b)	A
	How		
	A	They should be arranged so that, after loading or unloading operations, the liquid remaining in these pipes may be safely removed and may flow into either the vessel's cargo tanks or the tanks ashore	
	В	They should be arranged so that, after loading or unloading operations, the liquid remaining in these pipes may gather in special Sections from which it may be safely removed	
	C	They should be located entirely on deck	
	D	To avoid electrostatic charges during loading, they should be placed as close as possible to but above the deck	
130 02.0-04	7.2.4.	25.2	В
		loading and unloading piping be extended by rigid or flexible pipes or aft beyond the cofferdams?	
	A	Yes, this is permitted if the rigid or flexible pipe has the same test pressure as the loading and unloading piping	
	В	No, this is prohibited, except for hose assemblies used for oily and greasy wastes resulting from the operation of vessels and the delivery of products for the operation of vessels	
	C	Yes, on condition that only UN No. 1999 TARS, LIQUID, flows through this piping	
	D	Yes, if the piping is equipped with non-return valves	

Number	Source		Correct answer
130 02.0-05	9.3.3.	16.1	В
130 02.0-06		g loading, unloading and gas-freeing, internal combustion engines are Where should they be located?	
	A	In the cargo area	
	В	Outside the cargo area	
	C	In the cargo area if they use a fuel with a flashpoint of more than $100^{\circ}\mathrm{C}$	
	D	In a special engine room forward of the cargo area	
130 02.0-06	3.2.3.	1, 3.2.3.2, Table C	A
		hich type of tank vessel as a minimum is UN No. 1203 MOTOR IT or GASOLINE or PETROL assigned?	
	A	Type N, closed	
	В	Type N, open	
	C	Type G	
	D	Type C	
130 02.0-07	3.2.3.	2, Table C	D
	in AD	nsport by tank vessels, three types of vessel are distinguished. Where DN is it stated on board of which types of tank vessel the various ances must, as a minimum, be transported?	
	A	In Subsection 7.1.1.21	
	В	In Section 9.3.3	
	C	In Section 1.2.1	
	D	In Subsection 3.2.3.2, Table C	
130 02.0-08	7.2.4.	16.4, 9.3.3.25.3	A
	Parag	e deck of a tank vessel, there is a transverse bulkhead complying with graph 9.3.3.10.2 at the end of the cargo area. What requirements must spected during loading, unloading and gas-freeing?	
	A	During loading or unloading, the door must not be opened without the permission of the master, so that gases heavier than air cannot penetrate into the accommodation	
	В	Closing the protection walls against penetration of gases is not necessary during loading, unloading and gas-freeing but during the journey	
	C	The protection walls against penetration of gases must be closed during loading, unloading and gas-freeing if there is little or no wind	
	D	The protection walls against penetration of gases must be closed during loading or unloading if the wind is blowing from the cargo area in the direction of the accommodation	

Number	Source		Correct answe
130 02.0-09	1.2.1,	Basic general knowledge	В
	What	is the typical characteristic of a tank vessel of type G?	
	A	It always has compensation piping	
	В	The cargo tanks are designed as pressure tanks	
	C	Supplementary cofferdams	
	D	The cargo tanks are made up of the outer hull and the deck	
130 02.0-10	9.3.3.	20.4	A
	On a o	closed tank vessel of type N, in which locations are flame arresters to and?	
	A	In the ventilation openings of the cofferdams	
	В	In the ventilation opening of the lubricating oil tank	
	C	In the ventilation openings of the engine room	
	D	In the accommodation ventilators	
130 02.0-11	1.2.1		A
	What	is the purpose of a flame arrester?	
	A	To prevent the propagation of a flame front in a space to be protected (e.g. cargo tank, cofferdam)	
	В	To increase the resistance to heat flow in the pipes	
	C	To stop impurities	
	D	To prevent explosive vapours escaping into the atmosphere	
130 02.0-12	9.3.3.	21.1 (d)	С
		nat degree of filling must the high level sensor for actuating the facility st overflowing in the cargo tank of a tank vessel be triggered, at the ?	
	A	85%	
	В	97%	
	C	97.5%	
	D	75%	

Number	Source	,	Correct answer
130 02.0-13	Basic	general knowledge, 9.3.3.21.1, 9.3.3.21.4	A
	Unde	r ADN, what is the definition of a level alarm?	
	A	A device that, during loading, gives a visible and audible warning that the maximum degree of filling has almost been reached	
	В	A device that shows the current degree of filling of the cargo tank in question	
	C	A device that shows that the oil fuel tank for the propulsion engine is nearly empty	
	D	A device that warns of excessive pressure in the cargo tanks	
130 02.0-14	9.3.3.	.21.1 (c)	В
		hat degree of filling must the level alarm device on a tank vessel of N be triggered, at the latest?	
	A	86%	
	В	90%	
	C	92%	
	D	97%	
130 02.0-15	Basic	general knowledge, 1.2.1	D
	What	is the typical characteristic of a tank vessel of type C?	
	A	Vessel with cylindrical cargo tanks	
	В	Single-hull vessel with closed system	
	C	Double-hull vessel with trunk deck	
	D	Double-hull vessel with flush deck	
130 02.0-16	8.1.6.	.2	A
		often should hoses and hose assemblies used for loading and ding of tank vessels be checked?	
	A	Once a year by persons authorized for this purpose by the competent authority	
	В	Every five years, when the certificate of approval is renewed	
	С	The leakproofness of the hose connections must be checked every year, and the condition and leakproofness of the hoses themselves every two years	
	D	Hoses must be checked initially after five years' use, and then every two years	

Number	Source		Correct answer
130 02.0-17	8.6.3		A
130 02.0-17		must be ensured during connection of the shore facility's cargo fer hose to the tank vessel's piping system?	
	A	That all the connecting bolts are fitted and tightened	
	В	That at least half the bolts are fitted and tightened during connection	
	C	Three fitted bolts are sufficient during connection, but they must be equally spaced and securely tightened	
	D	Nothing is required of the master; responsibility for connecting the shore facility's cargo transfer hose to the on-board system lies exclusively with the shore facility	
130 02.0-18	7.2.4.	25.4	С
		e in ADN does it state that the loading and unloading piping must be ed each time after loading?	
	A	In Section 2.2.3	
	В	In Subsection 3.2.3.2, Table C	
	C	In Paragraph 7.2.4.25.4	
	D	In the checklist	
130 02.0-19	1.2.1		В
	What	is venting piping?	
	A	A pipe of the shore facility which is connected during loading or unloading to the vessel's venting piping and is designed so as to protect the vessel against detonations or the passage of flames from the shore side	
	В	A pipe of the on-board installation that connects one or more cargo tanks to the gas return piping during loading and unloading, and that is fitted with safety valves protecting the tank or tanks against unacceptable internal overpressures or vacuums	
	C	A connecting pipe between the diesel hold and the daily supply tank	
	D	A compressed air connecting pipe between a pusher and tank barges	

Number	Source		Correct answer
130 02.0-20	1.2.1		A
	What	is gas return piping?	
	A	A pipe of the shore facility which is connected during loading or unloading to the vessel's venting piping and is designed so as to protect the vessel against detonations or the passage of flames from the shore side	
	В	A pipe of the on-board installation that connects one or more cargo tanks to the gas return piping during loading and unloading, and that is fitted with safety valves protecting the tank or tanks against unacceptable internal overpressures or vacuums	
	C	A connecting pipe between the diesel hold and the daily supply tank	
	D	A compressed air connecting pipe between a pusher and tank barges	
130 02.0-21	9.3.3.	25.2 (c)	С
		e deck of a tank vessel, should the pipes for loading and unloading be guishable from other piping?	
	A	Yes, by means of a special colour code indicated in ADN	
	В	Yes, the connections should be labelled in line with ADN	
	C	Yes, clearly, for example by means of colour marking	
	D	ADN does not contain provisions on this subject	
130 02.0-22	Delete	ed (07.06.2005)	
130 02.0-23	9.3.3.	22.1 (b)	D
		k vessel of type N has cargo tank openings with a cross-Section of than 0.10 m ² . How high above deck should they be located?	
	A	20 cm	
	В	30 cm	
	C	40 cm	
	D	50 cm	
130 02.0-24	9.3.3.	21.3	A
	From tank?	which point should it be possible to read the filling level of a cargo	
	A	From the control position of the shut-off devices	
	В	From the wheelhouse	
	C	From the general control station of the cargo transfer firm	
	D	From anywhere on the vessel	

Number	Source		Correct answer
130 02.0-25	9.3.3.	25.8	С
	suppl	oading and unloading system of a tank vessel of type N is used to y the cargo tanks with ballast water. What provisions are applicable to actions of the pipes?	
	A	They must be fitted with a high velocity vent valve	
	В	They must be fitted with an automatic stop valve	
	C	They must be located within the cargo area but outside the cargo tanks	
	D	They must be fitted with a standard C connection for an independent pipe	
130 02.0-26	Basic	general knowledge	С
	On a	tank vessel, what is a trunk?	
	A	The supports for the pipes for loading and unloading	
	В	The safe area between the engine room and the cargo tanks	
	C	Part of the cargo deck that projects above the level of the gangboard	
	D	The transverse strength	
130 02.0-27	1.2.1		A
	Whic	h space on a tank vessel of type N is part of the cargo area?	
	A	The cofferdam	
	В	The engine room	
	C	The accommodation	
	D	The forepeak	
130 02.0-28	9.3.3.	31.2	С
		tank vessel of type N, what is the least distance that the air intakes of ternal combustion engines must be located from the cargo area?	
	A	0.50 m	
	В	1.00 m	
	C	2.00 m	
	D	2.50 m	

Number	Source		Correct answer
130 02.0-29	9.3.3.	11.1	D
	with a	is the maximum permissible capacity of a cargo tank on a tank vessel in L x B x H greater than 3,750 m ³ , where there is no calculation for a tank?	
	A	200 m^3	
	В	280 m^3	
	C	350 m^3	
	D	380 m^3	
130 02.0-30	1.2.1		В
		water pressure (in metres) above the deck must a bulkhead on a tank withstand in order to be considered watertight within the meaning of ?	
	A	0.50 m	
	В	1.00 m	
	C	2.00 m	
	D	4.00 m	
130 02.0-31	9.3.3.	11.1 (c)	С
		k vessel is provided with pressure tanks. What working pressure must tanks be designed for, as a minimum?	
	A	100 kPa	
	В	200 kPa	
	C	400 kPa	
	D	500 kPa	
130 02.0-32	9.3.3.	11.3	D
	Where	e should a cofferdam be located on a tank vessel?	
	A	Forward of the cargo area only	
	В	Aft of the cargo area only	
	C	Forward and aft of the cargo area as well as in the middle of the vessel	
	D	Forward and aft of the cargo area	
130 02.0-33	Delete	ed (2012)	

Number	Source		Correct answer		
130 02.0-34	9.3.3.	23.2	D		
		tank vessel of type N, by what factor must the test pressure of the exceed the design pressure?			
	A	0.75			
	В	0.9			
	C	1.1			
	D	1.3			
130 02.0-35	9.3.3.	21.3	С		
		nk vessels of type N, closed, from which point should it be possible to overpressure or vacuum in the cargo tank?			
	A	From the valve of the cargo tank			
	В	From the engine room			
	C	From a location on board from where loading or unloading may be interrupted			
	D	From a location on shore from where loading or unloading may be interrupted			
130 02.0-36	9.3.3		D		
	Where in ADN are the rules for construction of type N tank vessels found?				
	A	In Subsections 9.1.0.0 to 9.1.0.95			
	В	In Subsections 9.2.0.0 to 9.2.0.95			
	C	In Subsections 9.3.2.0 to 9.3.2.99			
	D	In Subsections 9.3.3.0 to 9.3.3.99			
130 02.0-37	9.3.3.	21.1	D		
		r ADN, what equipment is not a safety and control installation against lowing of tanks?			
	A	The level gauge			
	В	The safety device for preventing overflowing			
	C	The level alarm			
	D	The aluminium indicator			

Number	Source	e	Correct answer
130 02.0-38	9.3.3	.22.4	C
	With be fit	which safety equipment or devices must closed tank vessels of type N ted?	
	A	An outlet to allow gas sampling	
	В	A sampling opening with a diameter of at least 0.60 m	
	C	Safety devices for preventing unacceptable overpressure or vacuum	
	D	A valve that diffuses escaping gases uniformly	
130 02.0-39	7.2.3	.25.1, 7.2.3.25.2	D
		t fixed pipes may be connected to the pipes for loading and unloading ank vessel?	
	A	The fuel pipe	
	В	The deck-swabbing pipe	
	C	The bilge piping system of the cofferdams	
	D	None of the above	
130 02.0-40	9.3.3.25.1		
	Where on board of a tank vessel should pumps and accessory loading and unloading piping be located?		
	A	In the cargo area	
	В	At least 0.30 m above deck	
	C	Not on the deck	
	D	On the deck	
130 02.0-41	9.3.3.25.8 (b)		В
	On a tank vessel of type N, what must be fitted at the junction between the ballast water suction pipe in a cargo tank and the cargo loading pipe?		
	A	A high velocity vent valve	
	В	A non-return valve	
	C	An automatic stop valve	
	D	A flame arrester	

Number	Source		Correct answer		
130 02.0-42	9.3.3.	25.7	A		
		tank vessel of type N, what must be fitted on the pipes for loading and ding?			
	A	Pressure gauges at the outlet of the pumps			
	В	An overflow valve			
	C	A high velocity vent valve			
	D	Flame arresters			
130 02.0-43	9.3.3.	25.6	A		
	How	must the pipes for loading and unloading be designed?			
	A	They must have, at the test pressure, the required elasticity, leakproofness and resistance to pressure			
	В	They must have, at most, the same test pressure as the cargo tanks			
	C	They must be fitted with pressure-relief valves and vacuum-relief valves to avoid excessive or insufficient pressure			
	D	They must be fitted with valves that shut automatically when loading flows are too great			
130 02.0-44	9.3.3.	25.8 (b)	D		
	or as	argo loading pipe is used to take in water for washing the cargo tanks ballast water. What type of fitting is required at the junction between ater suction pipe and the cargo loading pipe?			
	A	A valve			
	В	A ball valve assembly			
	C	An automatic stop valve			
	D	A non-return valve			
130 02.0-45	9.3.3.	23.3	С		
	What is the minimum value of the test pressure for the pipes for loading and unloading on tank vessels of type N?				
	A	100 kPa			
	В	500 kPa			
	C	1,000 kPa			
	D	2,000 kPa			
		Deleted (01.01.2007)			

Number	Source	e	Correct answer
130 02.0-47	9.3.3	.25.4 (b)	В
		re in the cargo tank of closed tank vessels of type N, must the opening e pipes for loading and unloading be located?	
	A	Directly below deck	
	В	At the bottom	
	C	By the sidewall	
	D	By the forward bulkhead	
130 02.0-48	9.3.3	.11.3	D
	What	t is the purpose of the cofferdams?	
	A	They serve as maintenance spaces	
	В	They serve as supplementary cargo tanks	
	C	They serve as slop tanks	
	D	They separate the vessel's ends from the cargo tanks	
130 02.0-49	9.3.3	.50.1 (b)	В
	the e	of the documents required on board tank vessels of type N is a list of lectrical equipment installed in the cargo area. Which of the following culars need not be included?	
	A	Appliance and location	
	В	Dimensions and capacity	
	C	Type of protection, type of protection against explosion	
	D	Testing body and approval number	
130 02.0-50	7.2.3	.31.1	С
	What is the prescribed flash point for fuels for on-board internal combustion engines of tank vessels transporting dangerous goods?		
	A	No more than 23 °C	
	В	No more than 50 °C	
	C	At least 55 °C	
	D	There are no provisions on this subject	

Number	Source		Correct answer
130 02.0-51	9.3.3.	.10.2	С
	On tank vessels, what is the minimum height of the lower edges of door- openings in the sidewalls of superstructures and the coaming of access hatches to under-deck spaces?		
	A	0.30 m	
	В	0.40 m	
	C	0.50 m	
	D	0.60 m	
130 02.0-52	9.3.3.	.11.3 (a)	В
		tank vessel, what must provide the separation between the service so outside the cargo area below deck and the cargo tanks?	
	A	An active bow rudder room	
	В	A cofferdam	
	C	An engine room	
	D	A watertight bulkhead	

Number	Source		Correct answer
130 03.0-01	5.4.1.	1.6.5	В
	A tan	k vessel has empty, uncleaned cargo tanks. Who is deemed to be the gnor?	
	A	The owner of the last cargo	
	В	The master	
	C	The consignor of the next cargo	
	D	The shipping company	
130 03.0-02	7.2.3.	20.1	D
	outer	k vessel of type N with cargo tanks that are independent of the vessel's hull and are not insulated has been discharged. May the double-hull s and double bottoms be filled with ballast water?	
	A	No, this is permitted only when transporting substances for which a tank vessel with cargo tanks independent of the hull is not required	
	В	No, taking on ballast water is not permitted, even during empty journeys	
	С	Yes, but only if all the cargo tanks are empty and gas free, provided that this has been taken into account in the intact and damage stability calculations and that it is not prohibited in column (20) of Table C of Subsection 3.2.3.2	
	D	Yes, taking on ballast water is permitted in this case, provided that this has been taken into account in the intact and damage stability calculations and that it is not prohibited in column (20) of Table C of Subsection 3.2.3.2	
130 03.0-03	7.2.4.	22.2	D
	protec	k vessel is transporting substances of Class 3 for which anti-explosion ction is required. May the cargo tank apertures be opened during portation?	
	A	Yes, but only as stipulated in Subsection 7.2.4.22	
	В	Yes, but only for a short time for inspection purposes	
	C	Yes, but only if the gas concentration is less than 50% of the lower explosive limit	
	D	No	

Number	Source	Correct answer
130 03.0-04	8.3.5	В
	Before work that requires the use of an open flame or electric current or t is liable to cause sparks may be carried out on board a tank vessel, an authorization or a certificate attesting to the totally gas-free condition of t vessel must be obtained. Who issues such authorizations?	
	A The fire service	
	B The competent authority	
	C The classification society	
	D The shipping police	
130 03.0-05	7.2.3.7.2	С
	When may gas-freeing of tank vessels be carried out while the vessel is under way?	
	A For all substances, without restriction	
	B Only in the vicinity of tank terminals	
	C Under the conditions stipulated in Paragraph 7.2.3.7.2	
	D Under the conditions stipulated in Paragraph 7.2.4.7.2	
130 03.0-06	Basic general knowledge	В
	On a closed tank vessel, pressure-relief valves are fitted on the gas discharge piping. The flame arresters in the cargo tank openings are clogged. What may occur during loading?	
	A The cargo tank may not fill completely	
	B The cargo tank may become misshapen (swollen)	
	C There may be a loss of pressure through the pressure equalization openings in the covers of the cargo tank	
	D The high velocity vent valve may be damaged	
130 03.0-07	9.3.3.26.3	С
	What is the maximum permissible capacity of a residual cargo tank on tavessels of type N?	nk
	$A \qquad 20 \text{ m}^3$	
	B 25 m3	
	$C 30 \text{ m}^3$	
	$D \qquad 35 \text{ m}^3$	

Number	Source		Correct answer
130 03.0-08	Basic	general knowledge, 1.2.1	В
	Why	do tank vessels have stripping pipes?	
	A	To enable optimum filling of the cargo tanks	
	В	To enable complete draining, if possible, of the cargo tanks and the cargo piping, so that only cargo residues remain	
	C	To enable the cargo to be heated, if necessary	
	D	To provide a simple means of loading several cargoes	
130 03.0-09	1.2.1		В
	Why	are tank vessels fitted with stripping systems?	
	A	To enable the cargo tanks to be ventilated	
	В	To enable maximum draining of the cargo tanks and the cargo piping	
	C	To enable the cargo tanks to be heated	
	D	To enable the cargo tanks to be filled completely	
130 03.0-10	Basic general knowledge		D
		risk is created when pressurized air is transmitted by the shore facility e loading piping?	
	A	The cargo may change colour	
	В	The vessel may capsize	
	C	This process does not create any risk for the vessel	
	D	The cargo tanks may become misshapen (swollen)	
130 03.0-11	7.2.4.	25.4	С
	Must	loading and unloading piping be drained after each loading operation?	
	A	No, this is actually prohibited	
	В	No, it is the master who decides. He may do so for safety reasons	
	C	Yes	
	D	Yes, if the shore facility so requires	

Number	Source	e	Correct answer
130 03.0-12	7.2.3	.7.4	В
	conce the ac	freeing of cargo tanks must be interrupted when dangerous entrations of gases are to be expected outside the cargo area, in front of ecommodation. At what concentration of dangerous gas must gasing be interrupted?	
	A	At more than 30% of the lower explosive limit	
	В	At more than 20% of the lower explosive limit	
	C	At more than 10% of the lower explosive limit	
	D	At more than 50% of the lower explosive limit	
130 03.0-13	7.2.3	.7.1	В
	When	re may gas-freeing of berthed tank vessels be carried out?	
	A	At any harbour	
	В	At the locations approved by the competent local authority	
	C	At any oil port	
	D	At any berthing area outside residential areas	
130 03.0-14	Basic	general knowledge	С
		ssel fitted with heating coils must go to a shipyard. Why are the heating rinsed?	
	A	To ensure that the cargo heating system is functioning	
	В	To ensure that the coils resist pressurized air	
	C	To ensure that there is no residual cargo in the coils owing to a leak	
	D	To ensure that the coils are not obstructed	
130 03.0-15	7.2.3.7.3		A
		hat locations is gas-freeing of substances other than UN No. 1203 OR SPIRIT or GASOLINE or PETROL authorized?	
	A	While the vessel is under way and at locations approved for this purpose	
	В	At harbour basins	
	C	At locks and their lay-bys	
	D	There are no restrictions	

Number	Source		Correct answer
130 03.0-16	9.3.3.	26.3	В
	What	is the maximum permissible capacity of a residual cargo tank?	
	A	20 m^3	
	В	30 m ³	
	C	25 m ³	
	D	35 m ³	
30 03.0-17	7.2.3.	7.2	С
	Class is unc	mpty tank vessel has transported UN No. 1208 HEXANES, Class 3, ification Code F1. The cargo tanks must be gas-freed while the vessel ler way. What is the maximum permissible gas concentration that may acuated into the ambient air through the flame arresters?	
	A	< 70% of the lower explosive limit	
	В	< 60% of the lower explosive limit	
	C	< 50% of the lower explosive limit	
	D	< 55% of the lower explosive limit	
30 03.0-18	7.2.3.	7.3	D
	Packi way.	k vessel has transported UN No. 2054 MORPHOLINE (Class 8, ng Group I). The cargo tanks are gas-freed while the vessel is under What is the maximum permissible concentration of the substance in ented mixture at the outlet?	
	A	< 50% of the lower explosive limit	
	В	< 30% of the lower explosive limit	
	C	< 20% of the lower explosive limit	
	D	< 10% of the lower explosive limit	
30 03.0-19	9.3.2.26.2, 9.3.3.26.2		D
	Must slop tanks be capable of being closed with lids?		
	A	No, but they must be fire resistant	
	В	No, but they must be easily manipulable and must be marked	
	C	Yes, but only if the capacity is greater than 2 m ³	
	D	Yes	

Number	Source		Correct answer
130 03.0-20	7.2.4	.22.1, 7.2.4.22.2	C
	Unde	er what circumstances may the flame arresters be removed for ing?	
	A	Under no circumstances	
	В	When this is provided for in the approval certificate	
	C	When the cargo tanks are empty, gas-freed and relieved of pressure and the concentration of inflammable gas in the cargo tank is less than 10% of the lower explosive limit	
	D	When this is provided for in the instructions in writing	
130 03.0-21	7.2.3	.1.4, 7.2.4.22.1	В
	It is r	rgo tank has been gas-freed after the carriage of UN 1294 TOLUENE. necessary to enter the tank in order to clean it. However, before the is entered, a measurement must be effected. Under what conditions this be done?	
	A	The cargo tanks must have been washed and dried	
	В	The person who effects the measurement must wear breathing apparatus and the cargo tank must have been relieved of pressure	
	C	The cargo tank must have been relieved of pressure	
	D	The person who effects the measurement must wear gloves and the cargo tank must have been relieved of pressure	
130 03.0-22	Basic	general knowledge	A
	What device	t risk may arise when a cargo tank is cleaned with a high pressure tee?	
	A	There is a risk of electrostatic charge	
	В	There is a risk that the jet of water may pierce the tank wall	
	C	There is absolutely no risk	
	D	There is a risk that the product may be contaminated	

Number	Source		Correct answer
130 03.0-23	Table	e C, column 20, observation 8	В
	tanks	k vessel has side compartments and a double-bottom. All the vessel's are loaded with the product UN No. 1780 FUMARYL CHLORIDE. the side compartments be filled with water up to 90%?	
	A	Yes, this is allowed	
	В	Yes, this is allowed but only if the side compartments are filled with drinking water	
	C	No, it is not allowed to fill the side compartments with water with this cargo	
	D	No, it is never allowed to fill the side compartments with water when the cargo tanks are loaded with a cargo	
130 03.0-24	7.2.4.	13.1	В
	the ta	k vessel has been unloaded. There are still a few litres of the cargo in nks. The cargo tanks have to be cleaned. What must be done if the residues are to be put in the residual cargo tank, which already ins another product?	
	A	Authorization must be obtained from the competent authority before the two products are put in the same tank	
	В	It must be ensured that the two substances do not react dangerously with one another	
	C	The average density of the products must be calculated first	
	D	Advice must be sought from the reception facility designated by the competent authority	
130 03.0-25	9.3.3	3.26.4	С
		conditions must a tank vessel's residual cargo tank fulfil on a closed N tank vessel?	
	A	It must be equipped with two pressure-relief valves	
	В	It must be equipped with a pressure-relief valve and a vacuum-relief valve	
	C	It must be equipped with a pressure-relief valve, a vacuum-relief valve and a level indicator	
	D	It must be equipped with a pressure-relief valve, a vacuum-relief valve and a safety device against overflowing	

Number	Source		Correct answer
130 03.0-26	8.3.5		C
		is the purpose of the certificate attesting to the totally gas-free tion of a vessel?	
	A	It confirms that, following the taking of measurements, the master has declared the cargo tanks to be clean	
	В	It confirms that measurements have been taken in all spaces on board, which have been deemed clean	
	C	It confirms that it is possible to work on board the vessel without risk arising from previous cargoes	
	D	It confirms that the cargo tanks are clean and ready to receive UN No. 1202 GAS OIL or DIESEL FUEL or HEATING OIL, LIGHT	
130 03.0-27	7.2.3.	7.5	D
	marki	the cargo tanks have been gas-freed, the master wishes to remove the ng referred to in Table C of Subsection 3.2.3.2 (blue cone(s) or blue s)). What is the maximum permissible concentration of flammable?	
	A	5% of the lower explosive limit	
	В	10% of the lower explosive limit	
	C	15% of the lower explosive limit	
	D	20% of the lower explosive limit	
130 03.0-28	7.2.3.	42.4	В
		certain substances are being unloaded, the cargo heating system must aced in a space that meets the requirements of Paragraph 9.3.3.52.3 (b).	
	When	does this provision not apply?	
	A	When the flashpoint of the cargo being unloaded is not less than 50 °C	
	В	When the flashpoint of the cargo being unloaded is not less than 60 °C	
	C	When the flashpoint of the cargo being unloaded is not less than 55 °C	
	D	When the flashpoint of the cargo being unloaded is not less than 100 °C	

Number	Source		Correct answer
130 03.0-29	7.2.3	42.2	C
30 03.0-29	A tan	k vessel is carrying a cargo that is heated during transport.	
	Unde	r ADN, what must the cargo tank(s) be equipped with?	
	A	A hygrometer	
	В	An instrument for measuring vacuums	
	C	A thermometer	
	D	An instrument for measuring overpressures	
130 03.0-30	7.2.3	.42.2, 9.3.3.21.1	A
	for w	pen type N tank vessel with flame arresters is transporting a substance hich column (9) of Table C in Subsection 3.2.3.2 prescribes an lation for heating the cargo.	
		n this substance is being transported, must the cargo tanks be equipped a thermometer?	
	A	Yes, this is required for these substances	
	В	No, on vessels of type N, the cargo tanks need never be equipped with a thermometer	
	C	Yes, on vessels of type N, the cargo tanks must always be equipped with a thermometer	
	D	No, this is not necessary, except where required in the instructions in writing	
130 03.0-31	3.2.3	.2, Table C, 7.2.3.42.2, 9.3.3.21.1	D
		pen type N tank vessel with flame arresters is transporting UN No. MESITYL OXIDE.	
		n this substance is being transported, must the cargo tanks be equipped a thermometer?	
	A	Yes, this is required for this product	
	В	No, on vessels of type N, the cargo tanks need never be equipped with a thermometer	
	C	Yes, on vessels of type N, the cargo tanks must always be equipped with a thermometer	
	D	No, this is not necessary for this product	

Number	Source	e	Correct answer
130 03.0-32	3.2.3	.2, Table C	В
		nk vessel of type N that has no possibility of heating cargo has to port a cargo of UN No. 1779 FORMIC ACID.	
		t is the external temperature below which the vessel may no longer port this product?	
	A	15 °C	
	В	12 °C	
	C	20 °C	
	D	10 °C	
130 03.0-33	3.2.3	.2, Table C	С
	MOL	nk vessel is transporting UN No. 2215 MALEIC ANHYDRIDE, TEN. Protection against explosion is not required for this substance. er ADN, what is the maximum allowable temperature for carriage?	
	A	15 ℃	
	В	72 °C	
	C	88 °C	
	D	90 ℃	

Number	Source		Correct answer
130 04.0-01	7.2.4.	22.3	В
130 04.0-01		closed type N tank vessel, may the cargo tank sampling outlets be ed during loading?	
	A	Yes, but only on cargo tanks loaded with substances presenting a lesser degree of danger, such as petrol for example, for which protection against explosion is as prescribed in column (13) of Table C of Subsection 3.2.3.2. No special requirements or conditions need be observed	
	В	Yes, but in the case of cargo tanks loaded with dangerous substances for which marking with one or two blue cones or one or two blue lights is prescribed in column (19) of Table C of Subsection 3.2.3.2, only when loading has been interrupted for not less than 10 minutes	
	C	Yes, but the sampling outlets may be opened only with the consent of the cargo transfer station. The person who opens the sampling outlets must be protected against the danger presented by the cargo	
	D	No, opening of the sampling outlets is prohibited because all closed type N tank vessels must be equipped with a level indicator	
130 04.0-02	7.2.4.	22.1, 7.2.4.22.3	С
	a carg	loading of a tank vessel marked with one blue cone or one blue light, go sample must be taken. When, at the earliest, may the sampling be opened?	
	A	Once loading has been completed and the cargo tanks have been relieved of pressure	
	В	Only when the loading documents are available	
	C	Once loading has been interrupted for not less than 10 minutes and the cargo tanks have been relieved of pressure	
	D	30 minutes after loading has been completed	
130 04.0-03	3.2.3.	2, Table C, 8.1.5.1	В
		cordance with Table C, what equipment must there be on board a tank I when required in Table C of Subsection 3.2.3.2?	
	A	A self-contained breathing apparatus	
	В	A flammable gas detector	
	C	A nitrogen-measuring device	
	D	A rescue winch	

Number	Source	Correct answe	
130 04.0-04	3.2.3.2, Table C, 8.1.5.1	A	
	What equipment should be on board tank vessels when required under Part 8 and Table C of Subsection 3.2.3.2?		
	A A flammable gas detector		
	B A thermometer		
	C A nitrogen-measuring device		
	D An oxygen meter		
130 04.0-05	7.2.3.1.4, 7.2.3.1.5, 7.2.3.1.6	В	
	Which of the apparatuses referred to below is not one of the devices used to measure gases or dangerous vapours before entry into cargo tanks, cofferdams and other closed spaces?		
	A The flammable gas detector		
	B The pyrometer		
	C The toximeter		
	D The oxygen meter		
130 04.0-06	Basic general knowledge	В	
	The previous cargo of a cargo tank is not known. A measurement is taken with a flammable gas detector. The detector shows that there is no risk of explosion. May you enter the cargo tank without a self-contained breathing apparatus?		
	A Yes, because there is no risk of explosion		
	B No, because there may be toxic gases		
	C No, there might be insufficient nitrogen		
	D No, there might be too much oxygen		
130 04.0-07	7.2.3.1.4, 7.2.3.1.5, 7.2.3.1.6	С	
	A cargo tank is free of toxic gases. What is the value of the gas concentration in the cargo tank below which the tank may be entered?		
	A 25% of the lower explosive limit		
	B 33% of the lower explosive limit		
	C 50% of the lower explosive limit		
	D 70% of the lower explosive limit		

Number	Source	Correct answer
130 04.0-08	Basic general knowledge	A
	A cargo tank has been drained of petrol. Using a flammable gas detector, the risk of explosion must be assessed. At what height should the measurement be taken?	
	A At the bottom of the cargo tank	
	B At the top of the cargo tank	
	C Halfway up the cargo tank	
	D Exactly above the sampling outlet	
130 04.0-09	Basic general knowledge	С
	A sample is being taken through a sampling must a nylon cord never be used?	outlet. Why, for safety reasons,
	A Under the effect of the substance, the	nylon cord may break
	B With a nylon cord, the test tube may	slip and become detached
	C With a nylon cord, an electrostatic cl	narge may be produced
	D ADN prohibits the use of nylon cord	s
130 04.0-10	3.2.3.2, Table C	A
	After loading with UN No. 1203 MOTOR S PETROL, a sample must be taken. What tylused as a minimum?	
	A A sampling opening	
	B A closed sampling device	
	C A closed sampling device with expan	asion airlock
	D A partially closed sampling device	
130 04.0-11	3.2.3.2, Table C, 7.2.4.16.8, 8.1.5.1	В
	A vessel is loaded with UN No. 1718 BUTY cargo sample must be taken.	YL ACID PHOSPHATE and a
	In accordance with ADN, what is the minim equipment that must be worn?	num personal protective
	A A pair of protective goggles, a pair of boots, a protective suit and an approp breathing apparatus	
	B A pair of protective goggles, a pair of boots and a protective suit	f protective gloves, protective
	C A protective suit and protective boot	s
	D An appropriate ambient-air-depende	nt breathing apparatus

Number	Source	e	Correct answer
130 04.0-12	3.2.3	.2, Table C, 7.2.4.22.3	С
	ALL 1213	oard a tank vessel, two cargo tanks are loaded with UN No. 1100 YL CHLORIDE and six other cargo tanks are loaded with UN No. ISOBUTYL ACETATE. The vessel is equipped with a gas recovery and all the cargo tanks are connected to a common vapour pipe.	
		a sample of UN No. 1213 ISOBUTYL ACETATE be taken with a ed sampling device?	
	A	No, because an open sampling device is mandatory, as specified in Subsection 3.2.3.2, Table C, column (19)	
	В	No, because a partly closed sampling device is mandatory, as specified in Subsection 3.2.3.2, Table C, column (19)	
	C	Yes	
	D	Yes, but only with the authorization of the competent authority	
130 04.0-13	3.2.3	.2, Table C, 7.2.4.22.2	С
	cargo	ssel was loaded most recently with UN No. 2282 HEXANOLS and the clanks must be cleaned. In accordance with ADN, when, at the earliest, the cargo tank covers be opened?	
	A	After the cargo tanks have been relieved of pressure	
	В	After the cargo tanks have been totally gas-freed and there is no explosive mixture	
	С	After the cargo tanks have been gas-freed and the concentration of flammable gases in the tanks is less than 10% of the lower explosive limit	
	D	After the cargo tanks have been gas-freed and the concentration of flammable gases in the tanks is less than 20% of the lower explosive limit	

Number	Source	9	Correct answe
130 06.0-01	3.2, 3	3.1	C
		t is the meaning of "state of tank container 3" according to ection 3.2.3.2, Table C?	
	A	Pressure tank container	
	В	Closed tank container	
	C	Open tank container with flame arrester	
	D	Open tank container	
130 06.0-02	1.1.2	.1	В
	imme	mpty non-cleaned tank vessel of type N has carried petrol and ediately after it must carry diesel. What provisions does the vessel to meet?	
	A	Only those provisions in Part 2	
	В	All the relevant provisions of the ADN	
	C	The provisions of Part 7, Section 7.1.1	
	D	The instructions in writing of the last cargo	
130 06.0-03	8.3.1		A
	or PE	nk vessel is carrying UN No. 1203 MOTOR SPIRIT or GASOLINE ETROL. May the master carry persons who are not members of the , do not normally live on board or are not on board for official ons?	
	A	No, never	
	В	Yes, on condition that the consignor of the petroleum cargo has authorized it	
	C	Yes, but a maximum of two persons	
	D	Only with the permission of the owner of the vessel	
130 06.0-04	7.2.3	.1.1	D
	water	der to check if the bulkhead adjacent to the cargo being carried is rtight, the empty cofferdams of the tank vessel have to be examined. hat intervals should this examination be carried out?	
	A	After loading	
	В	At least three times per week	
	C	Every morning and every evening	
	D	Once a day	

Number	Sourc	re	Correct answer
130 06.0-05	1.6.7	.2, 7.2.3.20.1	С
	Can	the cofferdams of a tank vessel be filled with ballast water?	
	A	Yes, but only for navigation on canals	
	В	Yes, according to ADN the cofferdams are cargo tanks	
	C	No, under reserve of the transitional provisions in Subsection 1.6.7.2	
	D	No, the cofferdams may not be used as tanks for remnants of the cargo	
130 06.0-06	3.2.3	3.2, Table C, 7.2.4.21.3	С
		nk vessel of type N is loaded with a substance of Class 3. How may naximum permissible degree of filling be determined?	
	A	On the basis of the certificate of approval	
	В	On the basis of the transport documents	
	C	On the basis of Table C, the certificate of approval and the formula shown in Paragraph 7.2.4.21.3	
	D	On the basis of the instructions in writing	
130 06.0-07	3.2.3	3.2, Table C	D
		t is the maximum degree of filling for UN No. 1203 MOTOR RIT or GASOLINE or PETROL?	
	A	75%	
	В	91%	
	C	95%	
	D	97%	
130 06.0-08	3.2.3	3.2, Table C, 7.2.4.21	В
		re in ADN would you find the provisions concerning the maximum ee of filling of tank vessels?	
	A	In Paragraphs 9.3.2.21.1 and 9.3.2.21.2	
	В	In Subsections 3.2.3.2, Table C and 7.2.4.21	
	C	In Section 1.2.1	
	D	These appear not in ADN but in the certificate of approval	

Number	Sourc	re	Correct answer
130 06.0-09	3.2.3.2, Table C, 7.2.4.21		С
	When	re is it stated how full the cargo tank of a tank vessel may be filled?	
	A	In CEVNI	
	В	In the instructions in writing	
	C	In Subsections 3.2.3.2, Table C and 7.2.4.21 of ADN	
	D	In the certificate of approval	
130 06.0-10	7.2.4	.22.1, 7.2.4.22.2	В
	blue	nk vessel has transported a substance for which marking with one cone is required. May the housing of the flame arresters be opened neir assembly or disassembly?	
	A	Yes, this is always permitted when the cargo tanks have been relieved of pressure	
	В	Yes, but only after the cargo tanks have been gas-freed and the concentration of flammable gases in the tanks is less than 10% of the lower explosive limit	
	C	Yes, but only where authorized by the shore facility	
	D	No, this is not permitted	
130 06.0-11	7.2.4	.2.3	A
	good	a refuelling operation be carried out during unloading of dangerous is for which explosion proofing is required in column (17) of Table C absection 3.2.3.2?	
	A	Only with supply vessels, provided that the provisions for protection against explosion applicable to the dangerous goods are complied with	
	В	The decision is made by the cargo transfer company	
	C	Only in daylight	
	D	Yes, for closed type N tank vessels, not for others	

Number	Sourc	ce	Correct answe
130 06.0-12	7.2.4	4.76	В
		synthetic ropes be used for mooring during loading or unloading of a ed type N tank vessel?	
	A	Only steel cables may be used	
	В	Only if steel cables are used to prevent the vessel from going adrift	
	C	Only steel cables may be used in harbour basins	
	D	Only during loading or unloading of goods for the transport of which a blue light or blue cone is not required	
130 06.0-13	3.2.3	3.2, Table C	D
	fumi	ing the transport of UN No. 2031 NITRIC ACID, other than red ing, with at least 65% but not more than 70% acid, what is the imum degree of filling?	
	A	90%	
	В	95%	
	C	96%	
	D	97%	
130 06.0-14	3.2.3	3.2, Table C	С
		nk vessel has to transport UN No. 1301 VINYL ACETATE, BILIZED. What marking is the tank vessel required to display?	
	A	Two blue cones by day and two blue lights at night	
	В	For all goods of Class 3, one blue light or one blue cone must always be used	
	C	The vessel must carry one blue light or one blue cone	
	D	For such goods no marking is required	
130 06.0-15	3.2.3	3.2, Table C, 7.2.3.7.5	A
	carg	nk vessel has transported and then unloaded a cargo of petrol. The o tanks have not yet been cleaned. How does this affect the marking one blue light or one blue cone?	
	A	The marking remains unchanged	
	В	The marking should be removed	
	C	The marking may be retained or removed according to circumstances	
	D	The marking should be displayed at mid-height	


Number	Sourc	ce	Correct answer
130 06.0-16	Basi	c general knowledge	D
		the level of a liquid cargo in a closed cargo tank rise during sport?	
	A	No	
	В	Yes, but only in stormy waters	
	C	Yes, but only in the event of a fall in atmospheric pressure, in bad weather conditions	
	D	Yes, particularly when the liquid cargo is warmed, e.g. by the sun	
130 06.0-17	Basi	c general knowledge	В
	Why	should cargo tanks not be filled to the top?	
	A	Because the cargo would not be able to move freely with the motion of the water	
	В	Because liquid expands when heated and may damage the vessel and/or leak out of the tank	
	C	There is no reason why the tank should not be filled to the top	
	D	Because filling the tank to the top would take too long. It would cause disproportionate work at the cargo transfer station	
130 06.0-18	7.2.4	4.1	С
		at are the provisions applying to the transport of dangerous goods in ages on tank vessels?	
	A	The transport of packages on tank vessels is prohibited	
	В	The transport of packages on tank vessels is permitted, provided that the exempted quantities are not exceeded	
	С	The transport of packages in the cargo area is prohibited unless they comprise residual cargo, cargo residues or slops in no more than six approved intermediate bulk containers, tank-containers or portable tanks having a maximum individual capacity of not more than 2 m³, or 30 cargo samples	
	D	A maximum of 50,000 kg is permitted, although the prohibition on mixed loading must be observed	

Number	Source	2	Correct answer
130 06.0-19	Basic general knowledge An empty cargo tank having a capacity of 200 m³ is closed in such a way that no air can get out. Subsequently, 20 m³ of liquid is pumped into this cargo tank. What approximately is the absolute pressure in the cargo tank after this liquid has been pumped in?		В
	A	100 kPa	
	В	110 kPa	
	C	180 kPa	
	D	220 kPa	
130 06.0-20	Basic	general knowledge	В
	that n	mpty cargo tank with a capacity of 300 m ³ is closed in such a way to air can get out. Subsequently, 15 m ³ of liquid is pumped in. What eximately is the absolute pressure in the cargo tank after this liquid een pumped in?	
	A	Less than 100 kPa	
	В	More than 100 kPa	
	C	The absolute pressure	
	D	No increase in pressure	

Examination objective 6: Loading, unloading and transport

Number	Source	Correct answer
130 06.0-21	Basic general knowledge	A

The liquid in a tank ashore (see figure) has the same density as water. The valves of the vessel's cargo tank are closed. What is the overpressure on the loading pipes?

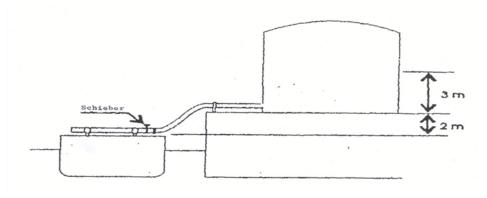

Note: Schieber = valve

A 50 kPa

B 100 kPa

C 500 kPa

D 1 000 kPa

130 06.0-22 Basic general knowledge

C

A quantity of $285 \, \text{m}^3$ has to be loaded in a cargo tank. The maximum permissible degree of filling is 95%. What must the minimum capacity of the cargo tank be?

 $A \qquad 280 \ m^3$

B $290 \, \text{m}^3$

 $C = 300 \text{ m}^3$

D 310 m^3

Number	Sourc	re	Correct answer
130 06.0-23	Dele	eted (30.9.2014)	
130 06.0-24	7.2.4	1.7.1	A
	In w	hat locations may tank vessels be loaded and unloaded?	
	A	In the locations approved by the competent authority	
	В	In all locations situated outside urban areas	
	C	In oil ports	
	D	In any location deemed appropriate by the master	
130 06.0-25	3.2.3	3.1, 3.2.3.2, Table C	A
		ch of the following substances crystallizes at a temperature of oximately 4 °C?	
	A	UN No. 1114 BENZENE	
	В	UN No. 1090 ACETONE	
	C	UN No. 1125 n-BUTYLAMINE	
	D	UN No. 1282 PYRIDINE	
130 06.0-26	3.2.3	3.1, 3.2.3.2, Table C	С
		ch of the following substances may be loaded at a temperature below in a tank vessel with no possibility of cargo heating?	
	A	UN No. 1114 BENZENE	
	В	UN No. 1145 CYCLOHEXANE	
	C	UN No. 2055 STYRENE MONOMER, STABILIZED	
	D	UN No. 1307 p-XYLENE	
130 06.0-27	Basi	c general knowledge	С
	PET be fi	r the loading of UN No. 1203 MOTOR SPIRIT or GASOLINE or ROL, four cargo tanks remain empty. These empty cargo tanks are to lled with UN No. 1202 GASOIL or DIESEL FUEL or HEATING, LIGHT. Special care should be taken to do what?	
	A	To pressurize the cargo tanks to be loaded with diesel fuel	
	В	To take the same safety measures as when loading an open type N tank vessel	
	C	To take the same safety measures as when loading petrol	
	D	To ensure that the lids of the empty cargo tanks are open so that any gases that may have formed can escape	

Number	Source	e	Correct answer
130 06.0-28	Basic	e general knowledge	С
	fillin	n a cargo tank is loaded to the maximum permissible degree of g, there still remains some space in the cargo tank. What is the ose of this empty space?	
	A	To make it easier to take samples	
	В	To provide space for lightening quantities	
	C	To allow for the expansion of the cargo	
	D	None of the above	
130 06.0-29	Basic	general knowledge	С
		ng the transport of dangerous goods, the cargo is sometimes covered nitrogen. Why is this done?	
	A	To prevent the cargo from shifting	
	В	To cool the cargo	
	C	To insulate the cargo from the outside air	
	D	To keep the temperature of the cargo constant	
130 06.0-30	7.2.4	.10.1	D
	When	n may loading or unloading of tank vessels be started?	
	A	Once the loading journal has been checked by the competent authority	
	В	Once the person responsible for trans-shipment operations at the shore facility has checked the cargo tanks	
	C	Once the gas return piping has been connected	
	D	Once the checklist has been satisfactorily completed	
130 06.0-31	3.2.3	.2, Table C	В
		t is the maximum degree of filling with UN No. 1203 MOTOR UT or GASOLINE or PETROL with more than 10% BENZENE?	
	A	91%	
	В	95%	
	C	97%	
	D	98%	

Number	Source	e	Correct answer
130 06.0-32	3.2.3	.2, Table C, 7.2.4.21.3	В
	of ap	No. 1230 METHANOL has to be loaded. According to the certificate proval, the permitted relative density is 1.1. What is the maximum ee of filling to which the cargo tanks may be filled?	
	A	Up to 97%	
	В	Up to 95%	
	C	Up to 91%	
	D	Up to 85%	
130 06.0-33	3.2.3	.2, Table C, 7.2.4.21.3	В
	certif	No. 1662 NITROBENZENE has to be loaded. According to the ficate of approval, the permitted relative density is 1.1. What is the mum degree of filling to which the cargo tanks may be filled?	
	A	Up to 95%	
	В	Up to 90.9%	
	C	Up to 93.3%	
	D	Up to 85%	
130 06.0-34	3.2.3	.2, Table C, 7.2.4.21.3	С
	subst	No. 1999 TARS, LIQUID has to be loaded. The temperature of the cance is 85 °C. What is the maximum degree of filling to which the tanks may be filled?	
	A	Up to 95%	
	В	Up to 91%	
	C	Up to 97%	
	D	Up to 85%	
130 06.0-35	3.2.3	.1, 3.2.3.2, Table C, column (20), 3.2.4.3	A
	CHL	ssel of type N has to transport UN No. 1780 FUMARYL ORIDE. Why should the double-hull spaces not be filled with water st during the voyage?	
	A	Because the substance has a violent reaction with water	
	В	Because double-hull spaces should not be used as ballast tanks	
	C	Because double-hull spaces may be used as ballast tanks only when the cargo tanks are empty	
	D	Because it should always be possible to ventilate double-hull spaces of vessels of type N	

Number	Sourc	re	Correct answer
130 06.0-36	3.2.3	3.1, 3.2.3.2, Table C, column (20)	В
	trans stabi	nk vessel of type N, which has a displacement of 2,000 m ³ , has to sport 145 m ³ of UN No. 2796 SULPHURIC ACID. To improve lity in strong winds, is it permitted to fill the adjoining double-hull es with ballast water?	
	A	Yes, this is permitted	
	В	No, this is prohibited with this cargo	
	С	Yes, this is permitted, provided that the double-hull spaces are no more than 90% full	
	D	Yes, this is permitted, provided that the double-hull spaces are completely full	
130 06.0-37	1.2.2	2.1	С
	How	many degrees Celsius equal 279 kelvin?	
	A	276 °C	
	В	552 °C	
	C	6 °C	
	D	12 °C	
130 06.0-38	Basic	c general knowledge	D
		No. 1307 p-XYLENE has to be loaded. The temperature of the cargo 5 °C. What data are needed to calculate the degree of filling at 15 °C?	
	A	The coefficient of sublimation at the temperature indicated	
	В	The density and volume of the substance	
	C	The coefficient of expansion and the density of the substance	
	D	The coefficient of expansion, the temperature difference and the volume of the cargo tank and the cargo	
130 06.0-39	7.2.4	4.1.1	D
	samp	nk vessel is transporting UN No. 1294 TOLUENE. How many cargo ples may be carried on the vessel and what are the maximum contents receptacle?	
	A	30 receptacles of 1,000 cl	
	В	10 receptacles of 1,000 cl	
	C	10 receptacles of 500 ml	
	D	30 receptacles of 500 ml	

Number	Sourc	e	Correct answer
130 06.0-40	7.2.4	1.1.2	С
		ooard an oil separator vessel, is it permitted to have receptacles for and greasy wastes?	
	A	No, this is not permitted	
	В	Yes, this is permitted if the gross quantity does not exceed 5,000 kg and the receptacles are properly secured in the cargo area	
	C	Yes, this is permitted if the maximum capacity of the receptacles does not exceed 2 m^3 and the receptacles are properly secured in the cargo area	
	D	Yes, this is permitted without restriction	
130 06.0-41	7.2.4	1.10.4	В
	oper	ording to ADN, when a supply vessel delivers products for the ation of vessels to a tank vessel loaded with flammable chemicals, ald a checklist be completed?	
	A	Yes, a checklist must be completed for every loading or unloading operation	
	В	No, this is not required under ADN	
	C	Yes, since the vessel is loaded with flammable substances	
	D	Yes, but only when the quantity delivered exceeds 30 m ³	
130 06.0-42	7.2.4	1.16.6	С
		t pressure should not be exceeded at the connection point when a el is unloaded and the gas discharge pipe is connected to the vessel?	
	A	30 kPa	
	В	40 kPa	
	C	The opening pressure of the high velocity vent valve	
	D	The opening pressure of the high velocity vent valve should not be exceeded by more than $10\ kPa$	
130 06.0-43	Dele	eted (2011)	

Number	Source	Correct answer
130 06.0-44	9.3.1.18, 9.3.2.18, 9.3.3.18	A
	A vessel is fitted with an inerting system. What overpressure should the system be capable of maintaining in the cargo tanks?	
	A 7 kPa	
	B 8 kPa	
	C 10 kPa	
	D 15 kPa	
130 06.0-45	3.2.3.2, Table C, 7.2.4.28.3	В
	UN No. 1230 METHANOL is being transport the cargo tank is over 40 kPa. What should be	
	A Open the high velocity vent valves of overpressure can be reduced	the cargo tank so that the
	B Immediately activate the water-spray s	system
	C Get the water-spray system ready so the internal pressure of the cargo tank	
	D Safely release the internal overpressur release device	e by using the cargo tank
130 06.0-46	3.2.3.2, Table C, 7.2.4.16.13	D
	May the bulwark ports of vessels carrying UN MOLTEN be closed off?	No. 2448 SULPHUR,
	A The bulwark ports may be closed off d	luring loading
	B The bulwark ports may be closed off d	luring loading and unloading
	C The bulwark ports may be closed off or	only during the voyage
	D The bulwark ports may not be closed or	off during loading
130 06.0-47	3.2.3.2, Table C, 7.2.4.16.13	В
	May the bulwark ports of vessels carrying UN LIQUID, N.O.S. be closed off?	No. 1993 FLAMMABLE
	A The bulwark ports may be closed off of	only during loading
	B The bulwark ports may be closed off d	luring loading and unloading
	C The bulwark ports may be closed off or	only during the voyage
	D The bulwark ports may not be closed or	off during loading

Number	Sourc	re e	Correct answer
130 06.0-48	3.2.3	3.2, Table C, 7.2.4.16.13	D
		the bulwark ports of vessels carrying UN No. 1993 FLAMMABLE UID, N.O.S. be closed off during the voyage?	
	A	The bulwark ports may be closed off only during loading	
	В	The bulwark ports may be closed off only during loading or unloading	
	C	The bulwark ports may be closed off only during the voyage	
	D	The bulwark ports may not be closed off during the voyage	
130 06.0-49	3.2.3	3.1	В
	3.2.3	tt code is used in column (5), "Danger", of Table C in Subsection 3.2, for substances with long-term effects on health (carcinogenic, agenic or toxic to reproduction)?	
	A	N1, N2 or N3	
	В	CMR	
	C	F or S	
	D	unst.	
130 06.0-50	3.2.3	3.1	С
	3.2.3	at code is used in column (5), "Danger", of Table C in Subsection 3.2, for substances that float on the surface water, do not evaporate are not readily soluble in water?	
	A	N1, N2 or N3	
	В	CMR	
	C	F	
	D	unst.	
130 06.0-51	3.2.3	3.1	С
	3.2.3	at code is used in column (5), "Danger", of Table C in Subsection 3.2, for substances that sink to the bottom of the water and are not ily soluble?	
	A	N1, N2 or N3	
	В	CMR	
	C	S	
	D	F	

Number	Source	2	Correct answer
130 06.0-52	3.2.3	.1	A
	3.2.3	t code is used in column (5), "Danger", of Table C in Subsection .2, for substances that are environmentally hazardous, meeting the ria for acute or chronic toxicity?	
	A	N1, N2 or N3	
	В	CMR	
	C	S	
	D	F	
130 06.0-53	delet	ed (27.09.2016)	
130 06.0-54	1.6.7	.4.2	D
		UN No. 1223 KEROSENE be carried in an open type N tank vessel flame arresters and type 2 cargo tank (single-hull tank vessel)?	
	A	No	
	В	Yes, but only until 31.12.2012	
	C	Yes, but only until 31.12.2015	
	D	Yes, but only until 31.12.2018	
130 06.0-55	delet	ed (27.09.2016)	
130 06.0-56	1.6.7	.4.2	D
	HEA cargo	permitted to carry UN No. 1202 GAS OIL or DIESEL FUEL or TING OIL (LIGHT) on a closed type N tank vessel with type 2 o tanks (single-hull tank vessel) if the substance appears in the list xed to the certificate of approval?	
	A	Yes, without restriction	
	В	Yes, but only until 31.12.2012	
	C	Yes, but only until 31.12.2015	
	D	Yes, but only until 31.12.2018	
130 06.0-57	7.2.5	.0.1	В
		e is a certificate attesting to the gas-free condition of a vessel. What ld be done with the "blue cone" or "blue light" marking?	
	A	The marking must remain visible	
	В	The vessel is not required to have blue cone or light markings	
	C	It is for the river police to decide whether the vessel should bear a blue cone or light	
	D	The "blue cone" or "blue light" marking should be placed at half-	

Number	Source	Correct answer
	mast	

Examination objective 7: Documents

Number	Source		Correct answer
130 07.0-01	8.1.8		A
	provi	nk vessels permitted to carry flammable liquid substances are ded with a certificate of approval. What does the certificate of aval attest?	
	A	That the vessel's construction and equipment comply with the relevant requirements of ADN	
	В	That the vessel's construction, arrangement and equipment comply with the general technical requirements	
	C	That the vessel has been built under the supervision of a recognized classification society and that it has been approved by it for the transport of dangerous goods	
	D	That the vessel's construction, arrangement and equipment and the composition of the crew comply with international requirements for the carriage of liquid fuels	
130 07.0-02	7.2.4.	10, 8.6.3	С
	Wher	e in ADN are the checklist and its use described?	
	A	In Section 1.2.1	
	В	In Subsection 3.2.3.2, Table C	
	C	In Subsection 7.2.4.10 and Section 8.6.3	
	D	In Subsection 9.3.3.10	
30 07.0-03	7.2.4.	10.1	С
		n should the checklist conforming to the model given in Section 8.6.3 mpleted?	
	A	During loading and unloading of dangerous goods for which the maximum quantity is limited under Paragraph 7.1.4.1.3	
	В	During the transfer of dangerous goods of Class I	
	C	Before beginning the loading or unloading of a tank vessel	
	D	During the transfer of dangerous goods for which the transport documents require a checklist to be drawn up	
30 07.0-04	7.2.4.	10.1	В
		many copies of the checklist conforming to the model given in on 8.6.3 should be completed?	
	A	One copy	
	В	Two copies	
	C	Three copies	
	D	As indicated by the cargo transfer station	

Examination objective 7: Documents

Number	Source	•	Correct answer
130 07.0-05	7.2.4.	10.1	В
	Who	should sign the checklist?	
	A	The master and another member of the crew	
	В	The master or a person mandated by himself and the person responsible for loading and unloading at the shore facilities	
	C	The master or a person mandated by himself and a representative of the competent authority	
	D	The checklist does not need to be signed; it simply acts as an aidememoire for the master so that the transfer may be carried out without any problems	
130 07.0-06	7.2.4.	10.1	D
	dange	rding to Subsection 7.2.4.10 of ADN, before loading or unloading of crous goods on tank vessels may start, a checklist must be completed igned. By whom?	
	A	It must be completed by the person responsible for the shore facilities and signed by the master or a person on board mandated by himself	
	В	It must be completed by the master and signed by the person responsible for the shore facilities	
	C	The checklist must be completed and signed by the master or the person responsible for the shore facilities	
	D	The checklist must be completed and signed by the master or a person on board mandated by himself on board and by the person responsible for the handling at the shore facilities	
130 07.0-07	7.2.4.	.10.3	С
	In wh	nat language or languages at least is the checklist printed?	
	A	In an official language of the country where loading or unloading takes place	
	В	In Dutch, English and French	
	C	In a language understood by the master and a language understood by the person responsible for the handling at the shore facilities	
	D	In the case of international transport, in English and French; in the case of national transport, in an official language of the country where the transport takes place	

Number	Source	•	Correct answer
130 07.0-08	8.6.3		D
		nich Section of ADN is there a model for the checklist referred to in action 7.2.4.10?	
	A	In Section 1.2.1	
	В	In Section 3.2.3	
	C	In Section 8.6.2	
	D	In Section 8.6.3	
130 07.0-09	Delet	ed (03.12.2008)	
30 07.0-10	7.2.2.	19.1, 8.1.8.1	D
	the ta	ast cargo of an empty tank vessel was UN No. 1202 GAS OIL. May nk vessel take a pushed barge loaded with 200 tonnes of wheat in a by-side formation?	
	A	Yes, but only if the two vessels are properly marked with cones	
	В	No, this is prohibited	
	C	Yes, the barge does not need a certificate of approval in this case	
	D	Yes, but only if the barge is also provided with a certificate of approval	
130 07.0-11	7.2.2.	19.1, 8.1.8.1	A
	condi	mpty, gas-freed tank vessel, with a certificate attesting to its gas-free tion, has engine damage. May it be towed to the nearest shipyard by a argo vessel?	
	A	Yes, a dry cargo vessel does not need a certificate of approval	
	В	Yes, a dry cargo vessel needs a certificate of approval	
	C	No, a tank vessel may in no circumstances be towed in a side-by-side formation	
	D	Yes, so long as the dry cargo vessel is also empty	
30 07.0-12	Delet	ed (03.12.2008)	
130 07.0-13	5.4.3.	2	A
		on board a tank vessel, must ensure that the relevant members of the understand and are capable of carrying out the instructions in writing orly?	
	A	The master of the tank vessel	
	В	The consignor of the dangerous goods	
	C	The filler of the dangerous goods	
	D	The owner of the tank vessel	

Number	Source	Correct answer
130 07.0-14	7.2.2.19.1	D
	In a convoy, a self-propelled tank vessel is carrying dangerous goods. A tank barge is carrying a non-dangerous substance, which is therefore not subject to ADN. Should the two vessels have certificates of approval?	
	A Only the self-propelled tank vessel	
	B No	
	C Only the tank barge	
	D Yes	
130 07.0-15	8.6.1.3, 9.3.3.25.9	A
	Which document sets out the maximum permissible loading and unloading flows for an open type N tank vessel?	
	A The certificate of approval or the loading instructions	
	B The vessel certificate	
	C The checklist	
	D The vessels substance list and the instructions on the loading and unloading flows	
130 07.0-16	Basic general knowledge	С
	When does a certificate issued by a recognized expert attesting that a vessel is gas-free become invalid?	
	A When the repairs mentioned in the certificate have been done	
	B Three months from the date of issuance	
	C When a substance, gas or vapour has spilt in the space concerned	
	D After repairs, once the vessel leaves the shipyard	
130 07.0-17	7.2.4.11.1	В
	What is the master of a tank vessel required to record in the loading journal?	
	A The UN number or the identification number and class for each cargo tank and, where known, the number of the certificate of approval	
	B The UN number or identification number and the proper shipping name of the substance, the class and the secondary hazards as well as, where known, the packing group for each cargo tank	
	C The UN number or the identification number for each cargo tank and the length and width of the tank vessel	
	D The UN number or the identification number, mass and class	

Number	Source	?	Correct answer
130 07.0-18	5.4.1.	.1.6.5	A
30 07.0-19		rding to ADN, under what circumstances should the master complete asport document himself?	
	A	When the cargo tanks are empty or discharged	
	В	After loading, when the consignor sends the transport documents to the consignee	
	C	Only when the cargo tanks are discharged but not yet gas-free and the vessel has to take on another cargo	
	D	Only when the cargo tanks are discharged but not yet gas-free and the vessel is going to another country	
130 07.0-19	8.1.1	1	В
	For w	which substance is it necessary to have a register of operations during age?	
	A	UN No. 1230 METHANOL	
	В	UN No. 1203 MOTOR SPIRIT or GASOLINE or PETROL	
	C	UN No. 1202 GAS OIL or DIESEL FUEL or HEATING OIL, LIGHT (flash point more than 60 °C and not more than 100 °C)	
	D	UN No. 1830 SULPHURIC ACID with more than 51% acid	
130 07.0-20	8.1.1	1	В
		is the minimum amount of time that the register of operations during age has to be kept on board?	
	A	One month	
	В	Three months	
	C	Six months	
	D	Twelve months	
130 07.0-21	1.16.1.2.5		D
	super	ssification society issues a certificate to a tank vessel built under its vision. The certificate includes a vessel substance list. What must this el substance list contain?	
	A	The dangerous goods that may not be carried in the vessel	
	В	The dangerous goods that may be carried in addition to those in Table C of Subsection 3.2.3.2	
	C	To what degree of filling the cargo tank may be filled	
	D	The dangerous goods that may be carried in the vessel	

Number	Sourc	re	Correct answer
130 07.0-22	8.1.8	3.2	A
	Wha	tt is the purpose of a tank vessel's certificate of approval?	
	A	It attests that the vessel complies with the relevant provisions of ADN	
	В	It attests that the vessel has been deemed suitable for the carriage of all kinds of goods	
	C	It attests that the vessel has been deemed suitable by the loader for the carriage of dangerous goods	
	D	It attests that the vessel complies with the general technical requirements	
130 07.0-23	8.1.9	9.1	В
		tt is the maximum duration of a tank vessel's provisional certificate of oval?	
	A	2 months	
	В	3 months	
	C	6 months	
	D	12 months	
130 07.0-24	5.4.3	3.2	С
	Ams	essel is carrying UN No. 1203 MOTOR SPIRIT from Rotterdam to sterdam. The master understands only German. In what language or uages should the instructions in writing be given?	
	A	In the language of the filler only	
	В	In at least the language of the filler	
	C	In at least one of the languages that the master and the expert can read and understand	
	D	In English, French and German	
130 07.0-25	7.2.4	4.12	A
		at indications, among others, have to appear in the register of ations during carriage?	
	A	Place of loading and UN Number	
	В	Official number of the vessel and place of unloading	
	C	Name of the master and degassing sector	
	D	Number of the certificate of approval and number of crew members	

Number	Source		Correct answer
130 08.0-01	8.3.5		С
	currer be cau	tenance or repair work requiring the use of an open flame or electric at has to be carried out in the cargo area of a tank vessel. Sparks may used during the work. Under what conditions may such work be d out?	
	A	After the necessary gas-freeing	
	В	When the tank vessel is carrying substances of Class 3 or Class 8 for which protection against explosion is not required in Subsection 3.2.3.2, Table C, column (17)	
	С	When the tank vessel is furnished with an authorization from the competent authority or a certificate attesting to the totally gas-free condition of the vessel	
	D	When, following gas-freeing, the absence of gas has been ascertained beyond any doubt by the master or an authorized agent of the shipping company using an instrument to measure the concentration of gases	
130 08.0-02	3.2.3.	2, Table C, 8.1.5.1	В
		sort of shoes should be worn for safety purposes during the trans- nent of flammable liquids?	
	A	Protective leather shoes	
	В	Protective boots	
	C	Rubber boots	
	D	Light sports shoes	
130 08.0-03	8.3.5		С
	What N?	tools may be used in the cargo area of a loaded tank vessel of type	
	A	When the vessel is carrying dangerous goods, it is generally prohibited to carry out repairs in the cargo area	
	В	Tools not made with chromium	
	C	Tools whose use does not cause sparks	
	D	Any metal tool	

Number	Source		Correct answer
130 08.0-04	7.2.3.	1.2, 7.2.3.1.3	A
	Is acc permi	eess to the double-hull spaces and double bottoms of tank vessels itted?	
	A	Yes, but only for carrying out inspections or cleaning operations and not while the vessel is under way	
	В	No, there is a general prohibition on such access	
	C	No, access is permitted only for carrying out inspections while the vessel is under way	
	D	There are no stipulations in this regard	
130 08.0-05	8.3.2		D
		remitted to use a portable lamp with cable, protected against sion, on the deck of a tank vessel?	
	A	Yes, provided that it is of a "certified safe" type, it may be used without restriction	
	В	Yes, but only outside the cargo area and not during gas-freeing. It should, as a minimum, be of a "certified safe" type	
	C	Yes, but only during the loading, unloading and gas-freeing of the tank vessel	
	D	No, only portable lamps of a "certified safe" type having their own source of power are permitted on the deck	
130 08.0-06	8.3.5		A
	-	work liable to cause sparks be carried out on board an "open type N" vessel?	
	A	No, this is prohibited on board all tank vessels	
	В	Yes, but if sparks should nonetheless be caused, the work should be halted immediately	
	C	Yes, Subsection 7.2.3.8 does not apply to type N tank vessels	
	D	ADN contains no stipulations in this regard	

Number	Source		Correct answer
130 08.0-07	8.3.4		A
30 08.0-07		open type N" tank vessel is loaded with 1,000 tonnes of UN No. 1202 OIL. Is smoking permitted on board?	
	A	No, the prohibition on smoking is applicable on the deck of all type N tank vessels	
	В	No, smoking is permitted on type N tank vessels only when the vessel is carrying substances of Class 8	
	С	Yes, it is permitted to smoke anywhere on board an open type N tank vessel	
	D	Yes, the prohibition on smoking applies only to the deck in the cargo area	
130 08.0-08	8.3.4		С
	marki	osed type N" tank vessel is carrying a substance for which no ang with blue cones or blue lights is required. Is smoking permitted in a commodation during the voyage?	
	A	Yes, in such cases it is permitted to smoke anywhere on board	
	В	Yes, the accommodation is considered a private area	
	C	Yes, provided that windows, doors and portholes are closed	
	D	No, the prohibition on smoking applies throughout the vessel	
130 08.0-09	8.1.6.	1	В
	On a type N tank vessel, how often should hand fire-extinguishers be inspected?		
	A	Every five years, when the certificate of approval is renewed	
	В	At least once every two years	
	C	Every three years	
	D	It is left to the master's discretion, but, if possible, an inspection should be carried out every two years	
130 08.0-10	7.2.4.	41	С
	LIGH	pen type N tank vessel is carrying UN No. 1202 HEATING OIL, IT. Is it permitted to cook on a diesel-fired stove or use an oil lamp in ecommodation during unloading?	
	A	Yes, but only by prior agreement with the cargo transfer station	
	В	Yes, this is not dangerous during the transfer of UN No. 1202 HEATING OIL, LIGHT	
	C	No, during loading, unloading or gas-freeing operations, fires and naked lights are prohibited on board the vessel	
	D	Yes, provided that all the entrances and openings of the accommodation are closed	

Number	Source	e	Correct answer
130 08.0-11	7.2.4	.41	В
130 08.0-11 130 08.0-12	A closed type N tank vessel is carrying UN No. 1203 MOTOR SPIRIT or GASOLINE or PETROL. Is it permitted to use an oil lamp in the accommodation during the voyage?		
	A	No, fires and naked lights are prohibited on board the vessel	
	В	On type N tank vessels, fires and naked lights are prohibited on board during loading, unloading or gas-freeing operations; they are permitted while the vessel is under way	
	С	No, when the cargo is UN No. 1203 MOTOR SPIRIT or GASOLINE or PETROL, fires and naked lights are prohibited during the voyage	
	D	Yes, but only where this has been expressly authorized by the competent authority	
130 08.0-12	9.3.3	.52.4	С
	GAS	ng loading or unloading of UN No. 1203 MOTOR SPIRIT or OLINE or PETROL and during gas-freeing of tank vessels, certain rical equipment should not be used. How is such equipment marked?	
	A	It has a sign in French, German and English	
	В	It carries a sticker with an appropriate warning sign (e.g., a burning light bulb with a red line through it, like a "No smoking" sign)	
	C	It is marked in red	
	D	It is coloured yellow or has a yellow sticker	
130 08.0-13	7.2.3	.1.6	В
		er what circumstances may a self-contained breathing apparatus be to enter a tank?	
	A	Self-contained breathing apparatuses may be used anywhere with or without supervision	
	В	The person wearing the self-contained breathing apparatus must wear the necessary protective equipment, be secured by a line and be supervised	
	C	A self-contained breathing apparatus may be used only if the master has been informed beforehand	
	D	There are no special provisions regarding the use of self-contained breathing apparatuses. However, before being used to enter a tank, a self-contained breathing apparatus must be checked to ensure that it is in working order	

Number	Source	,	Correct answer
130 08.0-14	Basic	general knowledge	В
	How	is static electricity produced?	
	A	By the slow, continuous charging of batteries	
	В	By the friction with each other of substances or objects that are bad conductors of electricity	
	С	By the creation of an electrical connection between the shore facility and the vessel	
	D	By the impact of metal against metal	
130 08.0-15	Basic	general knowledge	В
		can be done during loading of a cargo tank to keep the electrostatic e as low as possible?	
	A	Take down the flame arresters	
	В	Start the filling at a slower rate, until the head of the filling hose is immersed in the liquid	
	C	Start the filling at a faster rate so that the head of the filling hose is quickly immersed in the liquid	
	D	Constantly vary the loading rate	
130 08.0-16	7.2.3.	31.2	D
		or a motor boat is to be taken on board a tank vessel of type N. What dure should be followed?	
	A	Authorization must be obtained from the competent authority	
	В	There are no provisions regarding this for tank vessels of type N	
	C	If the battery has been removed beforehand and the engine is cold, the location of the car is immaterial	
	D	The car must be kept outside the cargo area	
130 08.0-17	8.3.5		A
	A tank vessel is carrying dangerous goods. May repair work requiring the use of an open flame be carried out on the deck, outside the cargo area?		
	A	No, this is not permitted unless the vessel is furnished with an authorization from the competent authority or a certificate attesting to the totally gas-free condition of the vessel	
	В	Yes, but only if a distance of 3 m from the cargo area is maintained when the work is carried out	
	C	Yes, but only if two additional fire-extinguishers are available	
	D	No, the work should be carried out by an expert authorized to do so	

Number	Source	?	Correct answer
130 08.0-18	8.3.5		A
	GAS	ok vessel under way is carrying UN No. 1203 MOTOR SPIRIT or OLINE or PETROL. Some welding work needs to be done in the te room. Is this permitted?	
	A	Yes, provided that the doors and openings are closed	
	В	Yes, but only if the engine room has been pronounced gas-free by an expert	
	C	No, under no circumstances	
	D	No, not while the vessel is under way, only in a shipyard	
130 08.0-19	Basic	general knowledge	A
		should the hoses on machines for washing tanks be regularly cted for their electrical conductivity?	
	A	To prevent electrostatic charges	
	В	To prevent the heating coils from charging	
	C	To prevent the washing water from charging	
	D	To prevent the cargo tanks from charging	
130 08.0-20	8.3.5		A
		oard an open type N tank vessel with flame arresters, some work s to be done on a tank cover using an electric drill. Is this permitted?	
	A	Only with an authorization from the competent authority or with a certificate attesting to the totally gas-free condition of the vessel	
	В	Only if a 24 V drill is used	
	C	Only if it is carried out by authorized persons who are specially qualified	
	D	Only if the crew has taken the necessary measures and there is no danger of explosion	
130 08.0-21	Basic general knowledge		A
		o tanks should be spray cleaned only if they have been ventilated ehand. Why?	
	A	There is a danger of electrostatic charges	
	В	There is already too much lead residue sticking to the walls	
	C	Because the cargo residues will become too diluted	
	D	Otherwise the slops cannot be removed from rusty tanks	

Number	Source	Correct answer
130 08.0-22	7.2.3.1.5, 7.2.3.1.6	A
	In an empty cargo tank where the previous cargo is unknown, the concentration of flammable gases has to be measured. The flammable gas detector does not work. Is it permitted to enter the cargo tank without a self-contained breathing apparatus?	
	A No, because the presence of toxic gases has not been verified and the oxygen level has not been measured	
	B Yes, since the cargo tank is now gas-free	
	C No, since measurements have to be taken at least twice with two different devices in the course of 10 minutes	
	D Yes, but only if the person entering the cargo tank wears a security harness and a filter mask	
130 08.0-23	7.2.3.1.6	A
	To carry out some cleaning work, a crew member has to enter a cargo tank It is not possible to measure the oxygen content. Which of the following pieces of safety equipment should not be used?	
	A A full mask with filter	
	B Protective boots	
	C A safety harness	
	D A protective suit	
130 08.0-24	Deleted (2012)	
130 08.0-25	3.2.3.2, Table C, 3.2.3.3, 3.2.3.4, 8.1.5.1	A
	A tank vessel is carrying dangerous goods of Class 3 for which protection against explosion is required. What sort of mask or breathing apparatus should be kept on board for each member of the crew?	
	A An ambient-air-dependent breathing apparatus	
	B An apparatus using pressurized air	
	C A half mask with filter	
	D A dust mask	

Number	Source		Correct answer
130 08.0-26	3.2.3.	2, Table C, 7.2.4.16.8	С
	When	n should filter masks be used?	
	A	In the course of work in a cargo tank that has not been cleaned	
	В	When entering a cargo tank, this is required under Table C of Subsection 3.2.3.2	
	С	When taking samples, if a toximeter is required under Table C of Subsection 3.2.3.2	
	D	When the volume of oxygen in the cargo tank is 21%	
130 08.0-27	Basic	general knowledge	С
		ker gets into the water during loading of a tank vessel. What happens substance?	
	A	The substance will expand on the surface of the water and then evaporate	
	В	The substance will mix with the water	
	C	The substance will sink to the bottom	
	D	The substance will expand on the surface of the water and not evaporate	
130 08.0-28	7.2.3.	44	С
		tank vessel, is it permitted to carry out cleaning work with liquids g a flashpoint below 55 °C?	
	A	Yes, but only outside the cargo area	
	В	Yes, but only in the engine room	
	C	Yes, but only in the cargo area	
	D	Yes, but only if a fire-extinguisher is at hand	
130 08.0-29	3.2.3.	2, Table C, 7.2.4.16.8	A
	cargo	No. 1202 GAS OIL has to be loaded on a tank vessel. The previous was also UN No. 1202 GAS OIL. According to ADN, should the ns connecting the loading pipe or arm wear a breathing apparatus?	
	A	No, this is not required for this product	
	В	No, ADN does not contain such a requirement	
	C	Yes, this is required for this product also	
	D	Yes, this is required unless the competent authorities waive the requirement	

Number	Source	Source 3.2.3.2, Table C, 7.2.4.16.8	
130 08.0-30	3.2.3.	В	
	vessel tanks	Io. 2079 DIETHYLENETRIAMINE has to be loaded on a tank 1. The previous cargo was UN No. 1202 GAS OIL and the cargo have been cleaned and gas-freed. According to ADN, should the ns connecting the loading pipe or arm wear a breathing apparatus?	
	A	No, there is no such requirement in ADN	
	В	No, this is not required for this product	
	C	Yes, this is required for this product also	
	D	This is required only for vessels of type C but not for vessels of type N	
130 08.0-31	3.2.3.2, Table C, 7.2.4.16.8		С
	UN No. 2289 ISOPHORONEDIAMINE has to be loaded on a tank vessel of type N. According to ADN, should the persons connecting the loading pipe or arm wear protective equipment?		
	A	No, there is no such requirement in ADN	
	В	No, this is not required for this product	
	C	Yes, this is required for this product also	
	D	No, this is not required, since on tank vessels of type N it is not required to have safety equipment on board	
130 08.0-32	3.2.3.	A	
	According to ADN, must a tank vessel carrying dangerous goods always have a flammable gas detector on board?		
	A	No, only when this is required under Table C of Subsection 3.2.3.2	
	В	Yes, this is part of the basic equipment	
	C	Yes, otherwise the vessel is not given a certificate of approval	
	D	No, this is required only when a vessel carries goods of Class 3	
130 08.0-33	1.2.1		A
	Acco		
	A	Combustion stabilized for an indeterminate period	
	В	Combustion stabilized for a short period	
	C	Fire followed by an explosion	
	D	Fire so intense that it produces a shockwave	

Number	Source		Correct answer
130 08.0-34	3.2.3	С	
	Acco		
	A	No, this is not obligatory unless expressly required in the instructions in writing	
	В	Yes, since, when dangerous goods are transported, there is always the risk that there will be a need to escape after a disaster	
	C	No, only if this is required under Table C of Subsection 3.2.3.2	
	D	No, except if this is required in the transport document	
130 08.0-35	3.2.3	.2, Table C, 3.2.3.3, 3.2.3.4, 8.1.5.1	С
	According to ADN, should all tank vessels carrying dangerous goods have a pair of protective boots on board for each member of the crew?		
	A	Yes, this applies to all vessels carrying dangerous goods	
	В	No, this does not apply to dry cargo vessels	
	C	Yes, this applies to all tank vessels	
	D	No, according to ADN, only protective shoes are required	
130 08.0-36	3.2.3.2, Table C, 8.1.5.1		D
	Acco		
	A	Yes, on board all tank vessels carrying flammable liquids	
	В	Yes, on board both dry cargo vessels and tank vessels	
	C	Yes, but only on board tank vessels	
	D	No, it depends on whether there is a need to enter enclosed spaces	
130 08.0-37	3.2.3	A	
	ADN deper		
	A	In the manufacturer's instructions for the filter	
	В	In Table C of Subsection 3.2.3.2 of ADN	
	C	In the transport document	
	D	In Table B of Subsection 3.2.2 of ADN	